

ODYSSEY[®]
THE EXTREME BATTERY



***The battery that
goes to extremes***



TPPL
THIN PLATE PURE LEAD

EnerSys[®]
Power/Full Solutions

Extreme power.

Phenomenal starting power and massive deep cycle reserve power in one battery!



Some batteries provide enormous cranking power. Others, deep cycle reserve power. The revolutionary ODYSSEY® battery is designed to do both.

How is this possible? The answer begins with flat plates made of 99.99% pure virgin lead – not lead alloy. Pure lead plates can be made thinner, so we can fit more of them in the battery. More ODYSSEY battery plates mean more plate surface area. And that means more power – twice as much as conventional batteries.

In fact, ODYSSEY batteries are capable of providing engine cranking pulses in excess of 2250 amps for 5 seconds – double to triple that of equally sized conventional batteries, even at very low temperatures. And they can handle 400 charge-discharge cycles to 80% depth of discharge.

This extreme combination of power and performance makes ODYSSEY batteries perfect for a range of applications, including automotive, marine, commercial, powersports – see the examples inside.

ODYSSEY® batteries vs. spiral-wound designs: 15% more plate surface area!



Unused battery space

Like many popular spiral-wound batteries, ODYSSEY batteries employ dry cell AGM technology to contain acid, allowing the battery to be installed even on its side. But the densely packed flat plates in an ODYSSEY battery avoid the “dead space” between cylinders in a “six-pack” design. The result is 15% more plate surface area – and that translates to more power!



ODYSSEY®
THE EXTREME BATTERY

www.odysseybattery.com
www.enersys-emea.com

Indestructibility.

Designed and built to last up to 3 times as long.

Thanks to rugged construction and AGM (Absorbed Glass Mat) design, ODYSSEY® batteries have an 8-12 year design life and a 3-10 year service life. Welded intercell connections enable

it to withstand extreme vibration, and AGM design holds acid in place to prevent spills, even when installed on its side. And unlike conventional batteries, ODYSSEY batteries can be stored for up to 2 years, and still be returned to full power.*

Pure Lead Plates

Constructed from 99.99% pure virgin lead, ODYSSEY battery plates are extremely thin, so more of them can fit into the battery. More lead plates equals more power.

Tin Alloy Coated Brass Terminals**

Brass terminals coated with a high-quality tin alloy ensure secure, corrosion-free cable connections.

Compressed AGM Plate Separators

Before being inserted into the case, the Absorbed Glass Mat plate separators are compressed for extreme vibration resistance.

Not All AGM Batteries are the Same

To maximise the advantage of AGM separation, we use 99.9% pure lead plates. This affords us the enviable distinction of massive cranking power combined with deep cyclic characteristics of 400 cycles to 80% DOD.

Robust Intercell Connections

Built to stringent specifications, cell connectors are casted to the plates, and bonded to resist vibration and eliminate internal sparking.



Available Metal Case

Selected ODYSSEY batteries are available with metal casing for high heat applications.

Ready out of the box

ODYSSEY batteries are shipped fully charged. If the ODYSSEY battery's voltage is 12.65V or greater, simply install the battery in your vehicle and you are ready to go! If below 12.65V, boost charge following the instructions in the ODYSSEY battery Owner's Manual and/or Technical Manual. Putting a boost on the battery will not damage it, even if its voltage reads higher than 12.65V.

* At 25°C. Storage times will be even longer at lower temperatures.

**PC1220 and PC1350 have lead terminals only.


ODYSSEY® battery power

Cold Start Performance S.A.E. J537, JUNE 82 and EN50342 -1 :2006 **Pulse Current † Can be fitted with brass automotive terminal
All batteries available with metal jackets, except PC310, PC535, PC625, PC1220, 75/86-PC1230, PC1350, 25-PC1400, 35-PC1500, 34M-PC1500, 34/78-PC1500, 65-PC1750, PC1800-FT, 31M-PC2150 and PC2250
Operating temperature range: -40°C to 45°C • -30°C to 40°C for PC1220, PC1350 and PC2250

	MODEL	Voltage	PHCA** (5 sec) A	CCA* (SAE) A	CCA* (EN) A	HCA	MCA	Nominal Capacity (20 Hr Rate-Ah)	Nominal Capacity (10 Hr Rate-Ah)	Reserve Capacity Minutes	Length mm	Width mm	Height mm	Weight kg	Terminal	Torque Specs Nm max	Internal Resistance (mΩ)	Short Circuit Current
PC310		12	310	100	100	200	155	8	7	9	138.0	86.0	101.0	2.7	M4 Receptacle	1.0	27.1	455A
PC535		12	535	200	230	300	265	14	13	21	170.2	99.1	157.0	5.4	M6 Stud	4.5	8	1000A
PC545		12	545	185	210	300	240	13	12	18	177.8	85.9	131.3	5.2	M6 Receptacle	5.6	10	1200A
PC625		12	625	265	310	440	350	18	17	27	170.2	99.1	175.0	6.0	M6 Stud	4.5	7	1800A
PC680		12	680	220	250	370	300	16	16	24	181.5	76.3	167.8	7.0	M6 Receptacle† or SAE 3/8" Receptacle	5.6	7	1800A
PC925		12	925	380	460	625	500	28	27	52	168.6	179.0	128.0	11.8	M6 Receptacle† or SAE 3/8" Receptacle	6.8	5	2400A
PC1200		12	1200	550	680	860	725	42	40	78	199.9	169.1	172.7	17.4	M6 Receptacle† or SAE 3/8" Receptacle	6.8	4.5	2600A
PC1220		12	1220	470	680	960	860	70	64.8	135	302.0	175.0	190.0	20.7	SAE	-	5.7	2200A
75/86-PC1230		12	1230	730	920	1050	815	55	50	100	240.3	177.5	201.2	20.6	TOP SAE SIDE 3/8" Receptacle	6.8	2.5	3100A
PC1350		12	1350	615	770	1080	960	95	88.5	195	377.0	175.0	190.0	27.4	SAE	-	4.2	2900A
25-PC1400		12	1400	820	1040	1150	850	65	55	125	240.3	173.7	220.7	22.7	SAE	7.9	2.5	3100A
35-PC1400		12	1400	820	1040	1150	850	65	55	125	240.3	173.7	220.7	22.7	SAE	7.9	2.5	3100A
34-PC1500		12	1500	880	1120	1250	1050	68	62	135	275.6	171.7	198.6	22.4	SAE	6.8	2.5	3100A
34M-PC1500		12	1500	880	1120	1250	1050	68	62	135	275.6	171.7	198.6	22.4	SAE and 3/8" Stud (Pos.), 5/16" Stud (Neg.)	7.9	2.5	3100A
34/78-PC1500		12	1500	880	1120	1250	1050	68	62	135	275.6	177.5	198.6	22.4	TOP SAE SIDE 3/8" Receptacle	6.8	2.5	3100A
PC1700		12	1700	875	1110	1325	1175	68	65	142	330.7	168.2	176.0	27.6	M6 Receptacle† or SAE 3/8" Receptacle	6.8	3.5	3500A
65-PC1750		12	1750	930	1180	1350	1070	74	65	135	300.5	182.9	188.7	26.3	SAE	7.9	2.0	5000A
PC1800-FT		12	1800	1300	1660	1600	1450	214	190	475	577.9	125.0	316.0	60.0	M10 Stud	9.0	3.3	3800
31-PC2150		12	2150	1150	1470	1545	1370	100	92	205	330.2	172.7	239.0	35.3	3/8" Stud or SAE	16.9-22.6	2.2	5000A
31M-PC2150		12	2150	1150	1470	1545	1370	100	92	205	330.2	172.7	240.5	35.3	SAE and 3/8" Stud (Pos.), 5/16" Stud (Neg.)	16.9-22.6	2.2	5000A
PC2250		12	2250	1225	1570	1730	1550	126	114	240	286.0	269.0	233.0	39.0	Dual SAE/DIN Terminal and 3/8" Stud	11.0 For 3/8" Stud Only	2.1	5000A

er for every application

TERMINAL LAYOUTS

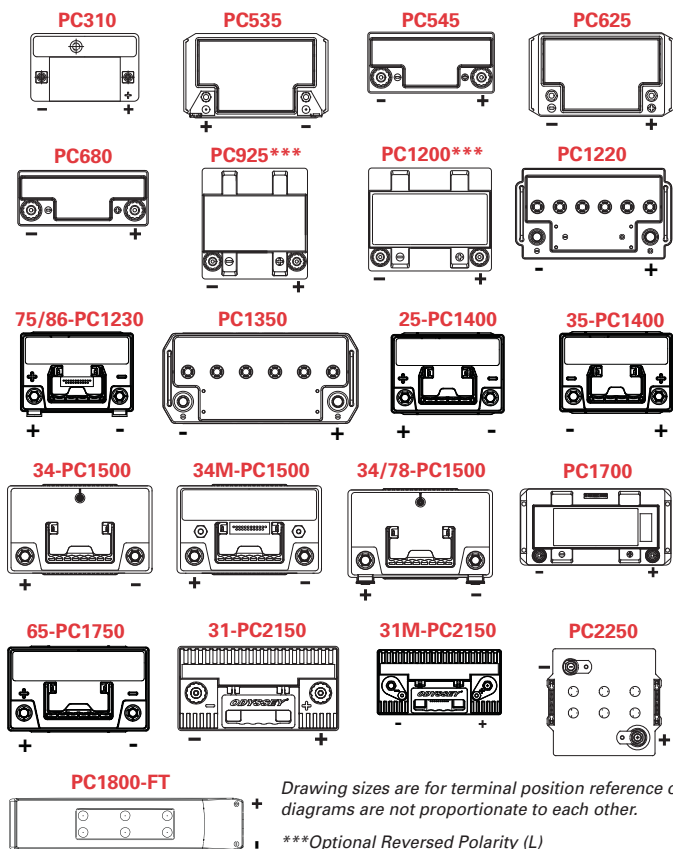

Drawing sizes are for terminal position reference only; diagrams are not proportionate to each other.

***Optional Reversed Polarity (L)

ODYSSEY® BATTERY TECHNOLOGY COMPARISON

	ODYSSEY® BATTERIES	CONVENTIONAL BATTERIES
DESIGN LIFE	8-12 years (Float) @ 25° C	5 years
SERVICE LIFE	3 to 10 years	1 to 5 years
ELECTROLYTE	Drycell ("starved electrolyte") no external leakage or corrosion	Most are acid flooded (causing acid burns and spills); some wet sealed or "gelled"
STORAGE LIFE	2 years before needing charge @ 25°C	6-12 weeks before needing charge
SHIPPING	Air transportable; US Department of Transportation classified non-spillable (less expensive)	Ground transport; classified as hazardous material (more expensive)
END OF LIFE	Battery slowly loses power at end of life; no catastrophic failure	Immediate and catastrophic loss of power (can leave you stranded)

WARRANTY:

EnerSys Energy Products Inc. ("Manufacturer") warrants its ODYSSEY® batteries (hereafter referred to as "Battery") to be free of defects in material and workmanship for the following Applicable Warranty Periods:

- 2 years for Auxiliary Power Unit (APU) and other non engine start cycling applications
- 2 years for power sports applications
- 3 years for commercial, industrial, marine and automotive applications in non BCI sizes.
- 4 years for an engine starting application for PC1220, PC1350, PC2250 and all BCI sizes.

The warranty does not cover a Battery reaching its normal end of life which may occur prior to the warranty periods stated above. Depending on the application a Battery can reach its normal end of life before the end of the warranty period.

A Battery can deliver only a fixed number of usable amp-hours over its lifetime and is considered to have reached its normal end of life if the application uses up all of these amp-hours, regardless of the time the Battery has been in service. Therefore Manufacturer reserves the right to deny a warranty claim if it determines the Battery to be at its normal end of life, even if the claim is lodged within the applicable warranty period.

The Applicable Warranty Period begins from the date of purchase with original receipt, or, if no receipt is available, from Manufacturer's shipping date as stated on the battery. Batteries determined to meet the conditions of this warranty will be replaced free of charge if, at the sole discretion of Manufacturer, adjustment is necessary due to defect in material or workmanship. Batteries for warranty replacement consideration are to be returned to the original supplying distributor/dealer. If not feasible, other ODYSSEY distributors/dealers can be approached but a warranty processing fee may be applied. This warranty may vary from country to country; contact your authorized ODYSSEY Battery wholesaler or dealer for the applicable warranty.

Batteries replaced under the warranty provisions will be shipped with a yellow replacement warranty sticker and carry only the remainder of the original Applicable Warranty Period.

GENERAL PROVISIONS

A. Manufacturer has no obligation under the limited warranty herein in the event the Battery is damaged or destroyed as a result of one or more of the following:

- Willful abuse, misuse, physical damage, neglect or if the top decorative cover has been removed.
- Natural forces such as wind, lightning, hail; damage due to fire, collision, explosion, vandalism, theft, penetration or opening of the Battery case in any manner.
- Overcharging, undercharging, charging or installing in reverse polarity, improper maintenance, allowing the Battery to be deeply discharged via a parasitic load or mishandling of the Battery such as but not limited to using the terminals for lifting or carrying the Battery. Trickle chargers that do not have a regulated trickle charge voltage between 13.5V and 13.8V (no lower than 13.5V and no higher than 13.8V) will cause early failure of the Battery. Use of such chargers with the Battery will also void the Battery's warranty. For applications where an alternator is present, the alternator must deliver between 14.0V and 14.7V when measured at the Battery's terminals. Alternators that do not have a regulated charge between 14.0V and 14.7V (no lower than 14.0V and no higher than 14.7V) will cause early failure of the Battery. Use of such alternators with the Battery will also void the Battery's warranty.
- Failure to properly install the Battery or lack of metal jacket for high temperature or vibration applications.
- Repair or attempted repair of the Battery by anyone other than an authorized Manufacturer's representative shall void this warranty.
- Normal or accelerated deterioration in the electrical qualities due to operating or application conditions.
- If the Battery is used for an application that requires higher cranking power or a greater reserve rating than the Battery is designed to deliver, or the Battery capacity is less than the Battery capacity specified by the vehicle manufacturer, or the Battery is otherwise used in applications for which it was not designed.
- Prolonged storage of vehicles with fuel injection computers, alarms, GPS and other electrical devices that require continuous battery power to support active memories; this power drain must be offset with a maintenance-float charger, periodic charging or disconnecting the Battery to prevent irreversible damage. A Battery with an open circuit voltage (OCV) of equal to or less than 10.0V will be deemed as over discharged and void warranty due to misuse and/or neglect.

- **WARNING - DO NOT USE ANY TYPE OF OIL, ORGANIC SOLVENT, ALCOHOL, DETERGENT, STRONG ACIDS, STRONG ALKALIS, PETROLEUM-BASED SOLVENT OR AMMONIA SOLUTION TO CLEAN THE BATTERY COVERS AND BATTERY TOPS. THESE MATERIALS MAY CAUSE PERMANENT DAMAGE TO THE BATTERY COVERS BATTERY TOPS AND WILL VOID THE WARRANTY.**

B. To obtain warranty service:

1. Return the Battery to the original supplying wholesaler or dealer.
2. If the Battery is determined by Manufacturer, in its sole discretion, to be defective for material or workmanship under terms of this limited warranty, it will be replaced.
3. Manufacturer's acceptance of any items shipped to Manufacturer shall not be deemed an admission that the items so shipped are defective. Any items shipped back to Manufacturer, shall in Manufacturer's sole discretion, become Manufacturer's property.

THIS LIMITED WARRANTY IS IN LIEU OF, AND MANUFACTURER DISCLAIMS AND EXCLUDES ALL OTHER WARRANTIES, STATUTORY, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. MANUFACTURER'S EXCLUSIVE LIABILITY FOR BREACH OF WARRANTY SHALL BE TO REPLACE THE BATTERY WITHIN THE EFFECTIVE WARRANTY PERIOD. IN NO EVENT SHALL MANUFACTURER BE LIABLE FOR ANY LOSS OR DAMAGES OF ANY OTHER KIND, WHETHER DIRECT, INCIDENTAL, CONSEQUENTIAL, EXEMPLARY, SPECIAL OR OTHERWISE. NOR SHALL MANUFACTURER BE LIABLE FOR ANY REMOVAL OR INSTALLATION EXPENSE, OR THE LOSS OF TIME OR PROFITS.

Some countries and/or states do not allow limitation on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you. This warranty gives you specific legal rights, which may vary from country to country and/or state to state. This warranty shall be governed by and interpreted in accordance with the laws of the Commonwealth of Pennsylvania without regard to Pennsylvania conflicts of laws rules. The United Nations Convention on Contracts for the International Sale of Goods signed in Vienna in 1980 shall not apply to this warranty. This warranty is understood to be the exclusive agreement between the parties relating to the subject matter hereof. No employee or representative of Manufacturer is authorized to make any warranty in addition to those made in this agreement.

About EnerSys®

EnerSys® is a global leader in stored energy solutions for automotive, military, and industrial applications. With manufacturing facilities in 17 countries, sales and service locations throughout the world, and over 100 years of battery experience, EnerSys is a powerful partner for automotive service and parts providers.

EnerSys Europe

Löwenstrasse 32
8001 Zurich
Switzerland

EnerSys Ltd.

Oak Court
Clifton Business Park
Wynne Avenue, Swinton
Manchester M27 8FF
UK
Tel: +44 (0)161 727 3952
Fax: +44 (0)161 727 3809

www.odysseybattery.com

www.enersys-emea.com



© 2011 EnerSys. All rights reserved.

Trademarks and logos are the property of EnerSys and its affiliates, except Gyrocopter™, which is not the property of EnerSys.

Publication No. EN-ODY-RS-008 – August 2011 Subject to revisions without prior notice. E.&O.E.