


Td5 EGR removal kit




Fitting instructions



Undo the 3 fixing bolts which secure the engine cover and lift it away.

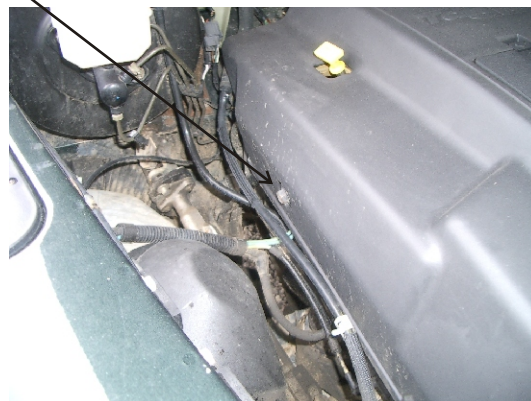


Remove the actuator pipes from the EGR control valve, pull off the rubber elbows and fit the supplied blanking plugs to the end of the pipes.

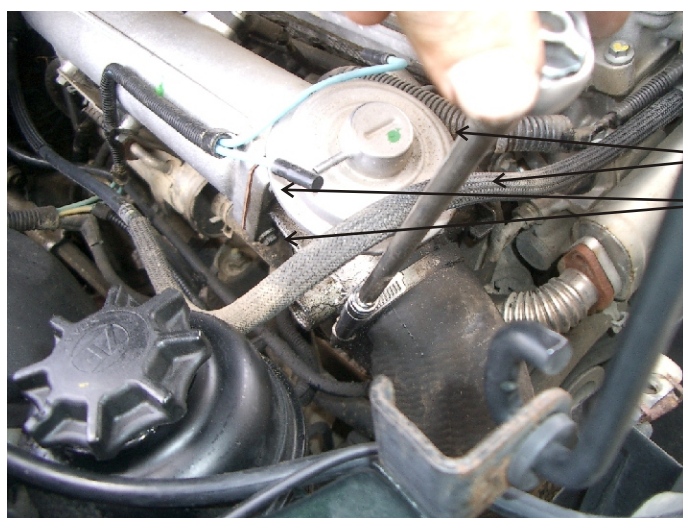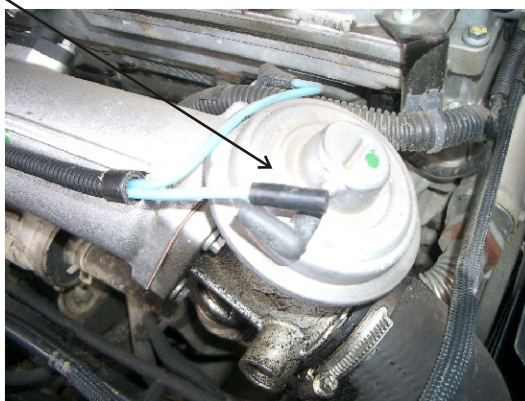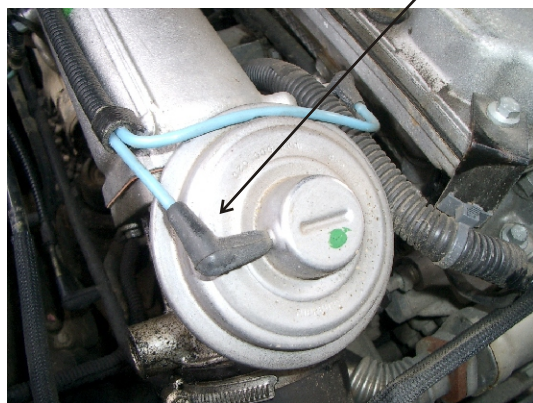

Remove the hose between the intercooler and EGR valve and undo the 4 bolts securing the EGR assembly to the inlet manifold.

Td5 EGR removal kit

Fitting instructions

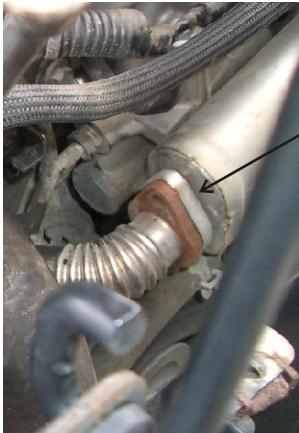

On vehicles fitted with an EGR cooler, remove the two bolts which secure the flexible metal hose to the cooler.

On vehicles with no EGR cooler, remove the two bolts which secure the flexible metal hose to the exhaust manifold.



Fit the supplied blanking plate to the exhaust manifold using a small amount of exhaust paste to seal the joint.



Fit the supplied EGR replacement pipe re-using the original gasket if undamaged. If there is any damage, fit a new gasket (Land Rover part number ERR6620)
Tighten the 4 securing bolts and re-connect the intercooler hose.

Finally, refit the engine cover and ensure that all pipes and hoses are secured.