

OMEGS16


MITSUBISHI TRITON / PAJERO

CONTENTS

	Part Number	Qty	Description
REAR	3199866	2	Side plates bent
	3199877	2	Side plates bent
	GSMP32	2	Pin
	GSMP33	2	Pin
	6151062	8	Nut M14*1.5
	6151064	8	M14 spring washer
	5728013	4	Grease nipple

INSTALLATION PROCEDURE

REFER TO MANUFACTURERS SPECIFICATIONS FOR REMOVAL AND REPLACEMENT PROCEDURES

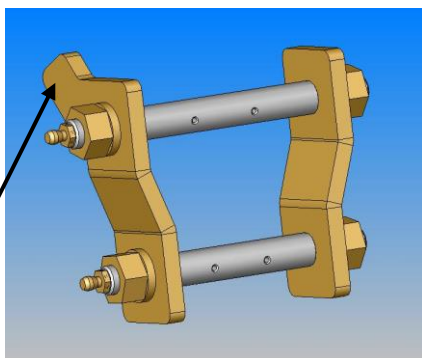

Right hand side shown

ANTI INVERSION POINT

Note Anti Inversion point facing forward so as to contact Chassis when in droop



Left hand side shown

1. Pre grease pins and bushes before assembly.
2. Assemble shackle with the anti inversion point of the plate facing to the inside of the chassis, and forward toward the inside cross member.
3. Grease nipples and pins can face either direction and will vary, depending on other accessories fitted to vehicle. Fit pins for easy access to the nipples.
4. Torque nuts to 60ft.lb - 81 NM
5. Using pressure grease gun re-grease after full assembly
6. **Note** : The anti inversion measure is designed for the 2006 Triton. Whilst on some early models this measure is not used the shackle assembly should still be assembled and fitted in the same direction.