
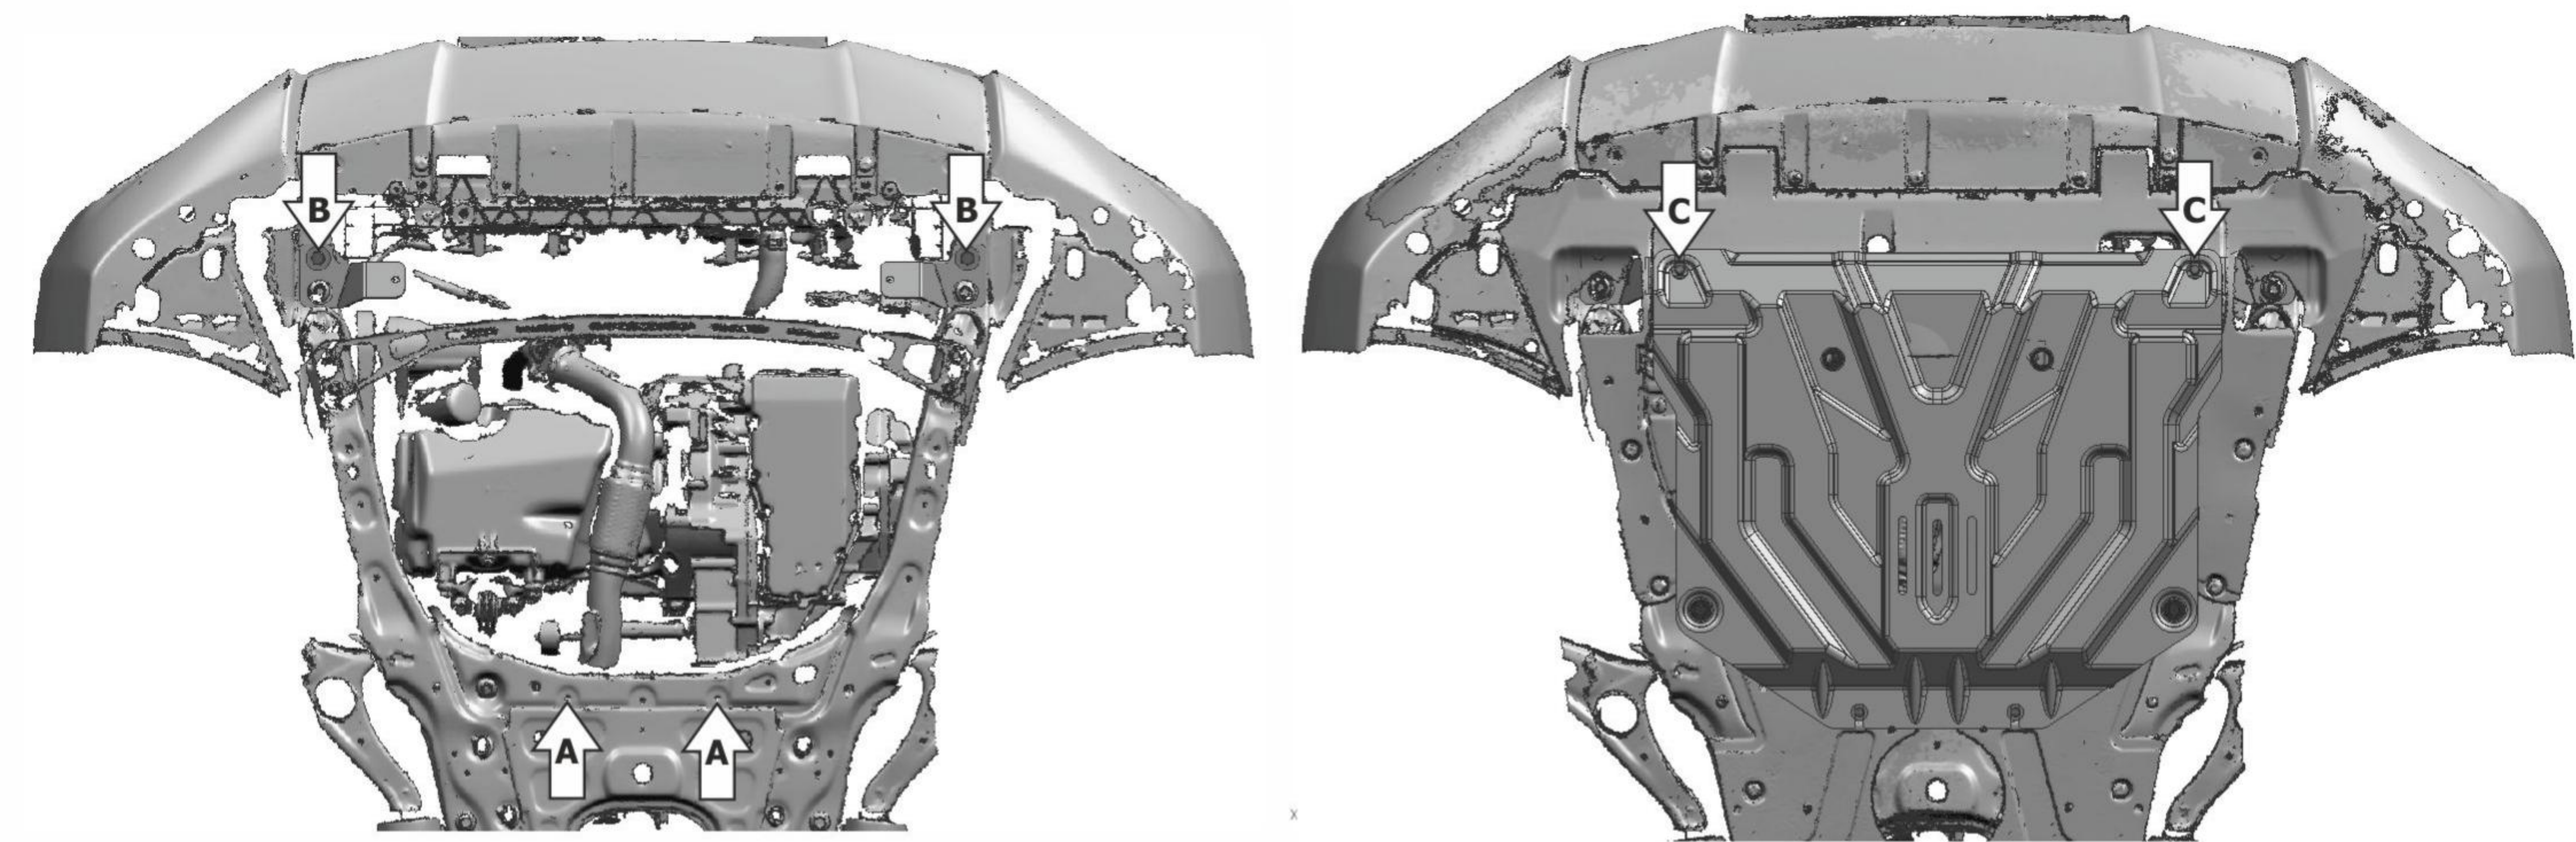


INSTALLATION MANUAL
ENGINE BAY AND GEARBOX
PROTECTION

2111.2131.2/2333.2131.2

BRAND	MODEL	YEAR	ENGINE	GEARBOX	DRIVE
Honda	CR-V	2017-	2.0, 2.4	AUTO	AWD

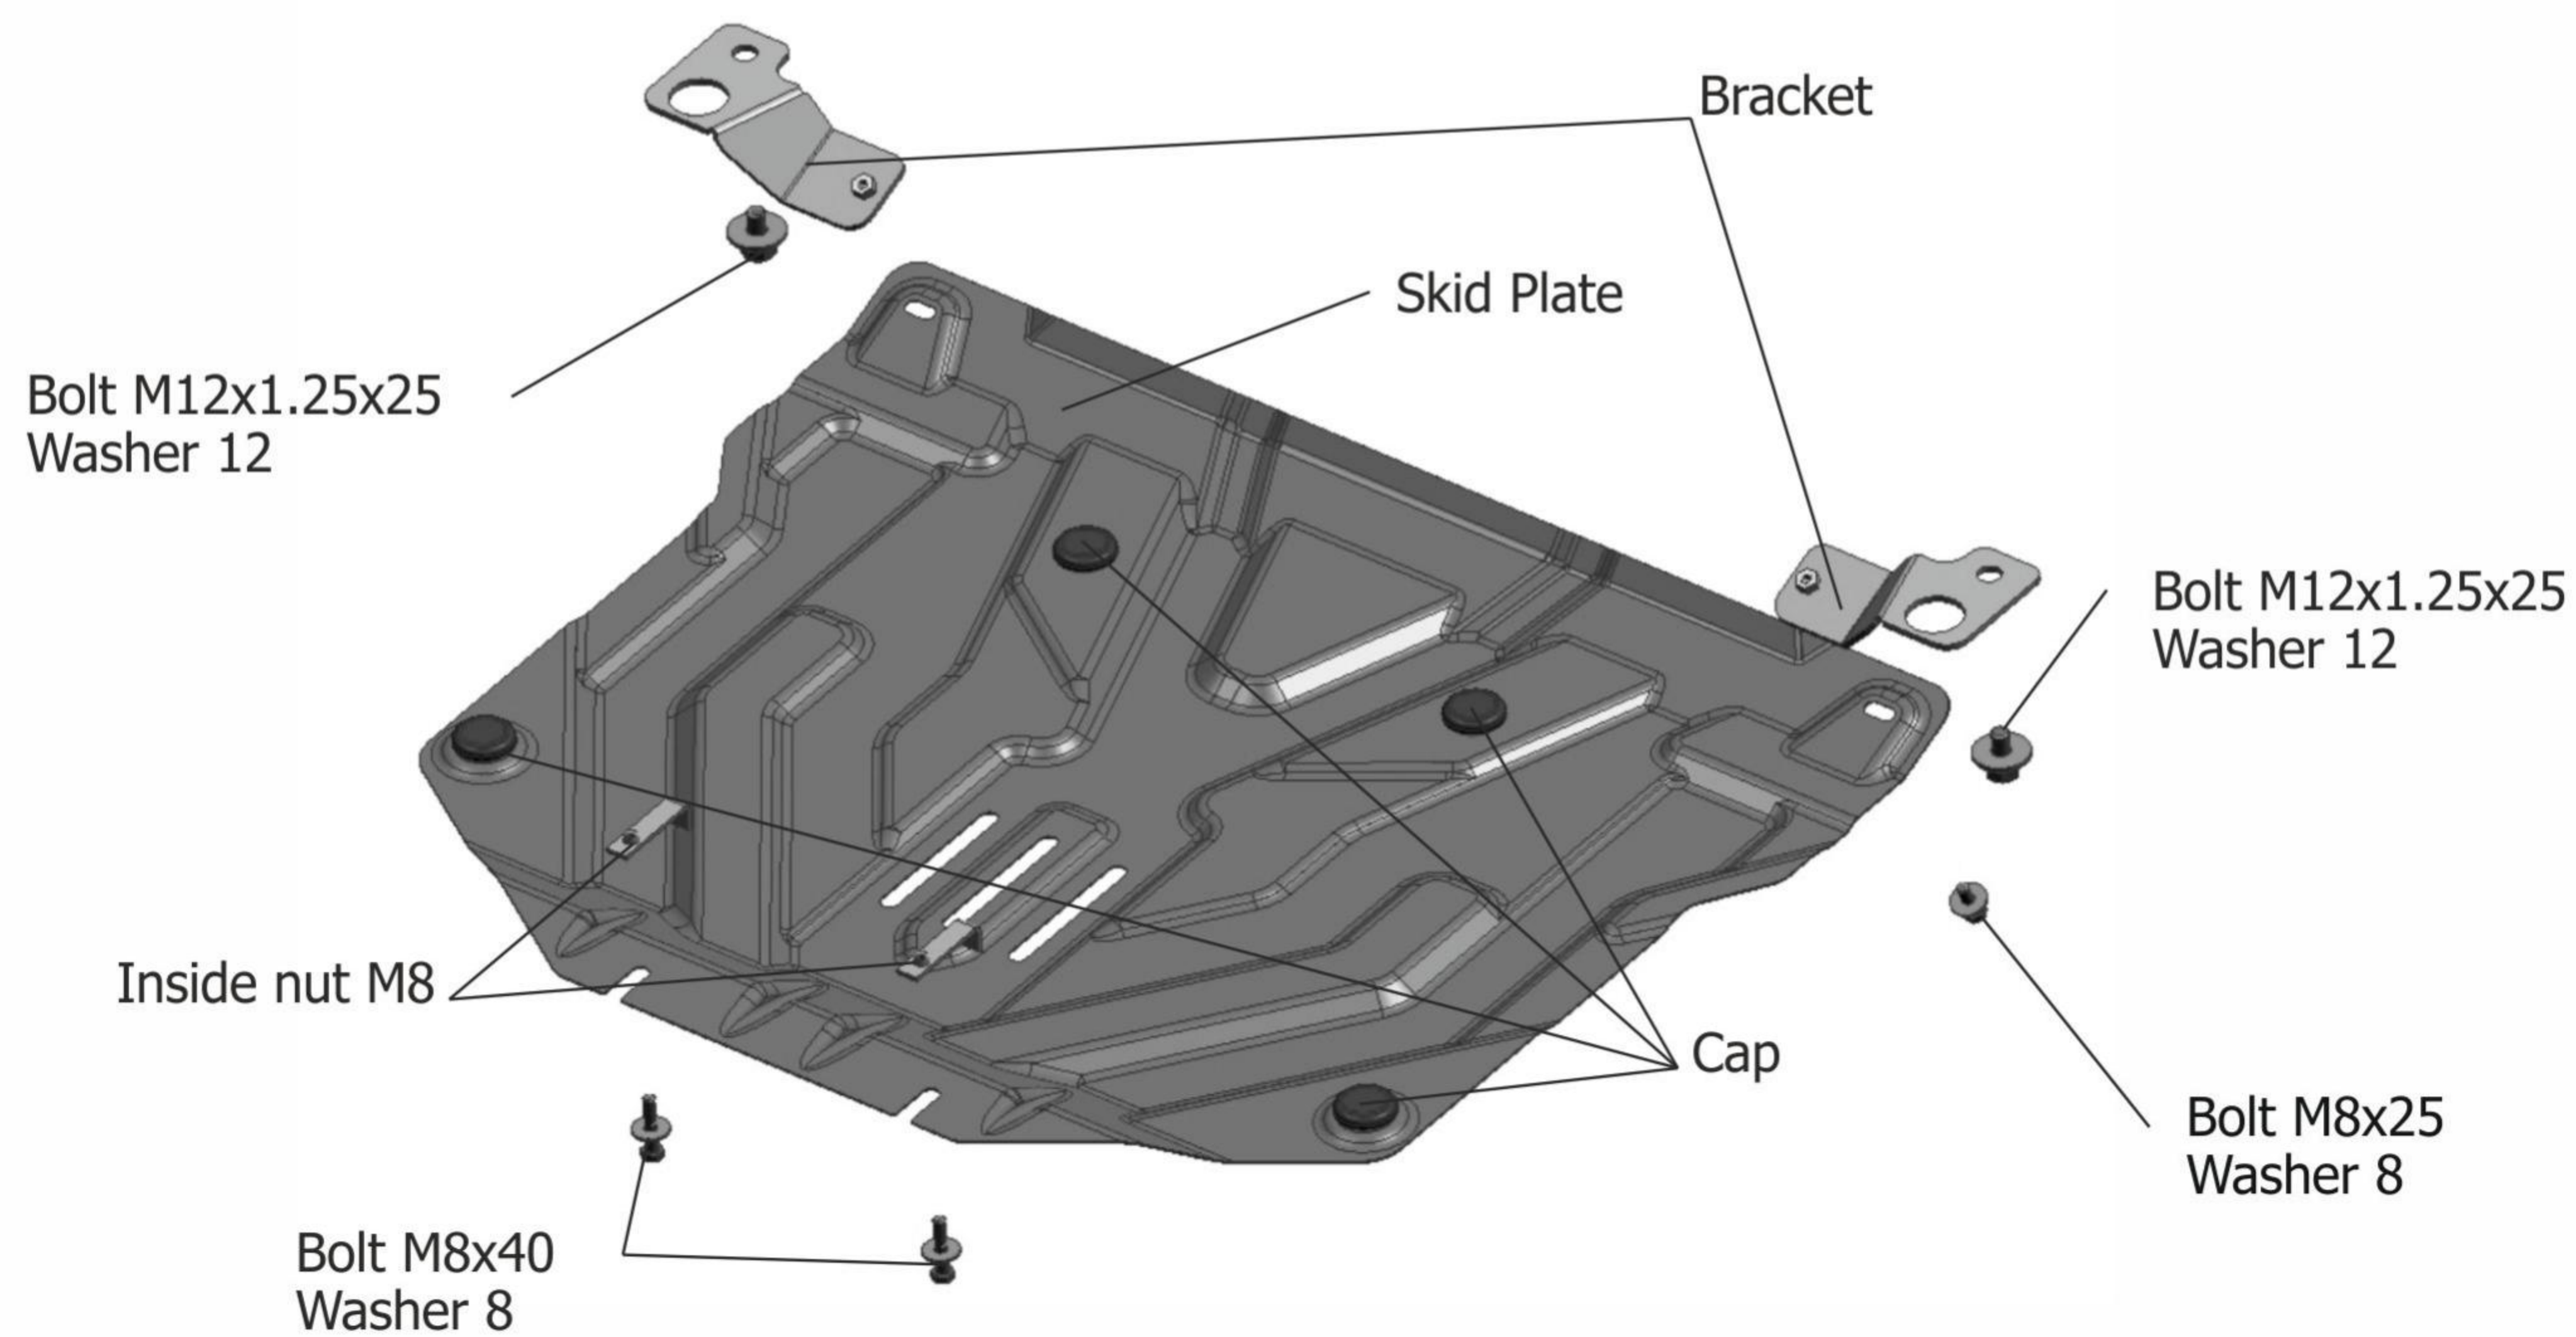

Installation Instructions:

1. Remove front part of OE dust cover and metal dust cover of engine block.
2. Remove 2 pistons (A) and mount inside nuts M8 over the holes, screw in bolts M8x40 on a few turns.
3. Remove side dust covers.
4. Mount brackets using bolts M12x1.25x25 into OE fitting points (B).
5. Mark and drill holes (C) in the dust coater for mounting skid plates to the brackets
6. Install OE dust covers.
7. Mount skid plate: put rear part on bolts M8x40, mount front part on brackets using bolts M8x25.
8. Tighten all screws with required torque.

Content:		
Name	QTY	Torque
Bolt M8X25	2 pcs.	24.0 Nm
Bolt M8X40	2 pcs.	24.0 Nm
Bolt M12x1.25x25	2 pcs.	81.0 Nm
Inside nut M8	2 pcs.	
Cap	4 pcs.	
Skid Plate	1 pc.	
Bracket	2 pcs.	
Washer M8	4 pcs.	
Washer M12	2 pcs.	

The manufacturer has the right to make changes to the design.
Support: techsupport@rival-europe.com