

INSTALLATION MANUAL

PRODUCT: ALUMINUM ROOF RACK
MODEL: MITSUBISHI L200 (2015-ON)
PART NO: 2D.4006.1.K / 2D.0004.1



CAUTION!

To reduce the risk of serious injury or damage, please read and understand all instructions and procedures before attempting to install or use this product.
Safety glasses must be worn at all times during installation or maintenance of this product.
Ensure all mounting bolts are tensioned after 1000 kms and periodically there after.

ROOF RACK

Part Number: 2D.0004.1 - roof rack
2D.4006.1.K - fitting kit
Suited to vehicle: Mitsubishi L200 2015-
Material: Aluminum
Dimensions: 1433x1170x163mm
Weight: 15,6kg



SAFETY NOTICE

- * The RIVAL roof rack is designed to compliment the use and design of the specified vehicle under conditions specified by the car manufacturer.
- * While driving the vehicle at any speed, collision with any other vehicle, animal or object must always be avoided.
- * The operation of a vehicle where the roof rack is not properly attached and fastened to the vehicle, or where it has been damaged, must be avoided at all cost.
- * It is recommended that you carry out regular inspections of all the bracket fittings.

INSTALLATION NOTICE

- * The RIVAL roof rack must be mounted and affixed to the vehicle according to the installation manual provided by an authorized RIVAL dealer or Motor dealer or by a special vehicle repair or fitment center.
- * Personal safety during the installation process must be adhered to at all times and the use of personal safety equipment is highly recommended.

REQUIRED TOOLS

- * Hexagon wrench set
- * Socket spanner set and wrench set

TORQUE SETTING

- * M6 9 Nm
- * M8 30 Nm




ADDITIONAL INFORMATION

*LIGHTS

There are mounting points located on roof rack for mounting 4 lights.
The distance between lights 200 mm.
Mounting hole diameter 9 mm.
Total mounting area length 600 mm.

PARTS LISTING

1. Lower rack.....	1 pc.
2. Upper basket.....	1 pc.
3. Left bracket.....	1 pc.
4. Right bracket.....	1 pc.
5. Deflector.....	1 pc.
6. Insert nut.....	10 pc.
7. Bolt M8x20.....	8 pc.
8. Screw M6x20.....	2 pc
9. Screw M8x12.....	4 pc
10.Screw M8x20.....	10 pc.
11. Nut M6.....	2 pc.
12. Nut M8.....	8 pc.
13. Washer 8.....	30 pc.

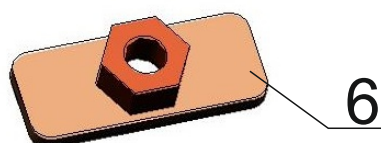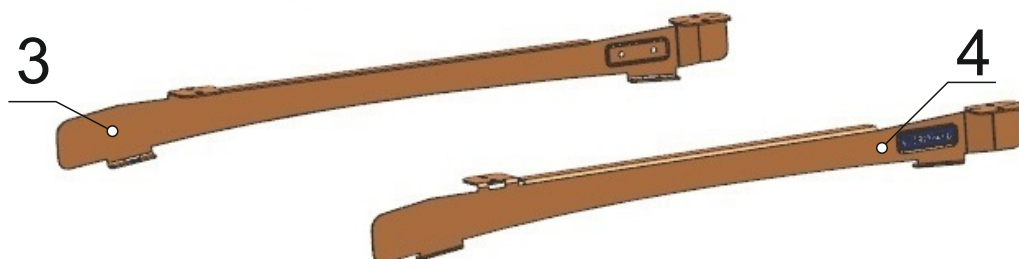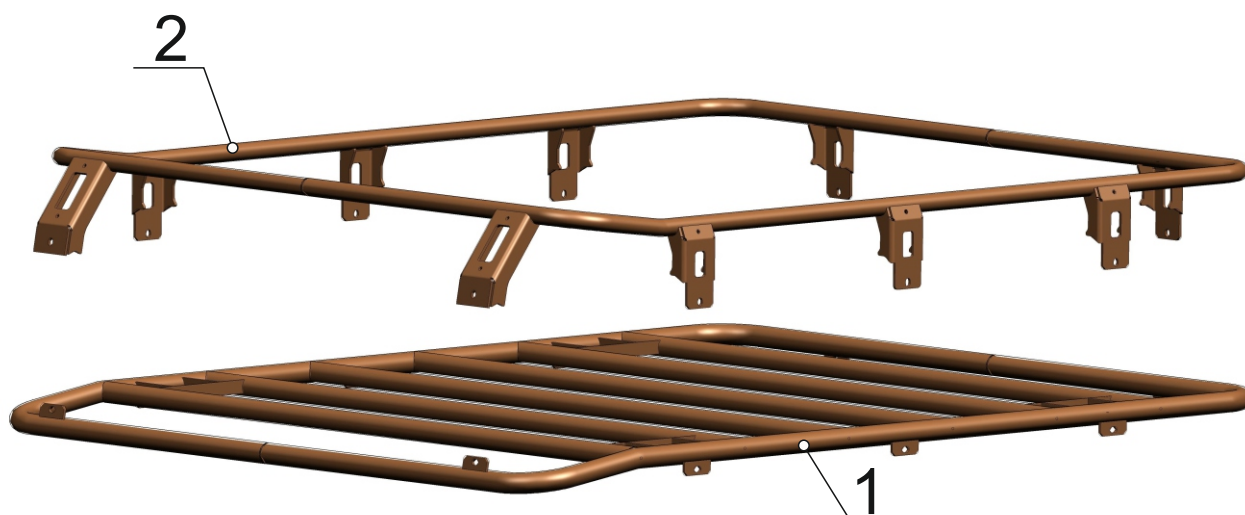

INSTALLATION PROCEDURE



1. Dismantle the plastic plugs of the regular mounting of the roof rack on the car roof.



2. Install the brackets pos. 3 and pos. 4 on the car roof. Fasten the brackets, using screws M8x12, pos. 7 and washers, pos. 10.



3. Install the upper deck pos. 2 on the lower deck pos. 1 using the captive nut pos. 5, screws M8x20, pos. 8 and washers pos. 11. Tighten all threaded junctions.



INSTALLATION PROCEDURE



4. Install roof rack using brackets pos. 3 and pos. 4. Fasten roof rack using bolts M8x20 pos. 7, nuts M8 pos. 12 and washers pos. 13. Adjust the roof rack, tighten all the threaded junctions.



5. Install deflector pos. 5. Fasten deflector using screws M6x20 pos. 8 and nuts M6 pos. 11 in the upper part, Fasten lower part using fixation points of upper basket to lower rack and screws M8x20 pos. 10.

INSTALLATION PROCEDURE

Before operating a vehicle fitted with a RIVAL roof rack, make sure all fittings are tightened.

