


Fitting Southdown Range Rover Discovery Tank Guard

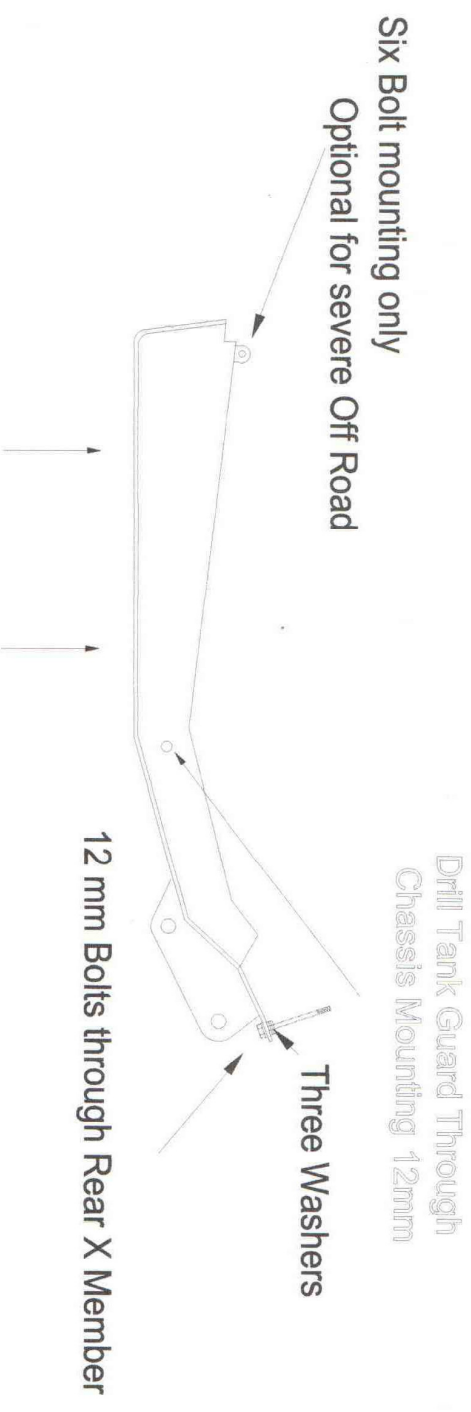

Before Installing , Plan Where to Install 7 Pin Plug, On the Guard, Bumper or Rear Door[Best Solution]

- 1]Remove Rear Bumper ,Remove Main Anti Roll Bar Mounts And Hinge Down Remove Any Existing Towing Equipment
- 2]Jack Tank Guard Assembly Into Position with Bolts Through Rear Cross Member
- 3]Drill Guard Side Plates to Suit Lower Chassis Mount
- 4]Insert Two 12mm Bolts Provided ,Attach Washers And Nuts, Tighten All Nuts And Bolts.
- 5]ReAttach Anti Roll Bar Assembly and Bumper

WARNING!! Care Must Be Taken Not To Puncture Fuel Tank When Drilling. Remove Guard If In Doubt!!