

ARB AIR LOCKER *Air Operated Locking Differentials*

RD213 Isuzu,RR,26 SPL

Specs:


Axle Spline	26 tooth, Ø33.5mm [1.32"]
Ratio Supported	All
Ring Gear ID	138.0mm [5.43"]
Ring Gear Bolts	12 bolts on Ø165mm [6.50"]
Ring Gear Bolt Size	10mm

Notes:

- 1 For replacement O-rings use only BS136 Viton 75
- 2 Available only as complete 6 gear set # 728H261

ITEM #	QTY	DESCRIPTION	PART #	NOTES
1	1	FLANGE CAP ASSEMBLY	027335	
2	1	BONDED SEAL	160702	
3	1	CLUTCH GEAR	050806	
4	4	SHORT CROSS SHAFT	060403	
5	1	SIDE GEAR	SEE NOTE	2
6	2	SIDE GEAR THRUST WASHER	151010	
7	2	COUNTERSUNK SCREW	200213	
8	4	RETAINING PIN	120601	
9	*	TAPERED ROLLER BEARING	NOT SUPPLIED	
10	1	SHIM KIT	SHK005	
*	1	MASTER SHIM	150341	
11	1	SEAL HOUSING ASSEMBLY	081813	
12	2	SEAL HOUSING O-RINGS	160207	1
13	8	RETURN SPRINGS	150113	
14	1	SPLINED SIDE GEAR	SEE NOTE	2
15	4	PINION GEAR	SEE NOTE	2
16	4	PINION THRUST WASHER	151110	
17	1	SPIDER BLOCK	070201	
18	1	THRUST BLOCK	110511	
19	1	DIFFERENTIAL CASE	013035	
*	1	BULKHEAD FITTING (O-RING TYPE)	170111	
*	1	PUSH-IN FITTING (5mm to 1/8"BSPP)	170201	
*	1	AIR LINE (5mm DIA X 6m LONG)	170301	
*	1	SOLENOID VALVE (12V)	180103	
*	1	SWITCH	180209	
*	1	SWITCH COVER (REAR)	180211	
*	10	CABLE TIE	180301	
*	1	WARNING LABEL	210101	
*	1	BUMPER STICKER	210102	
*	1	OPERATION & SERVICE MANUAL	210200	
*	1	INSTALLATION GUIDE	2102213	

* Not illustrated in exploded view.

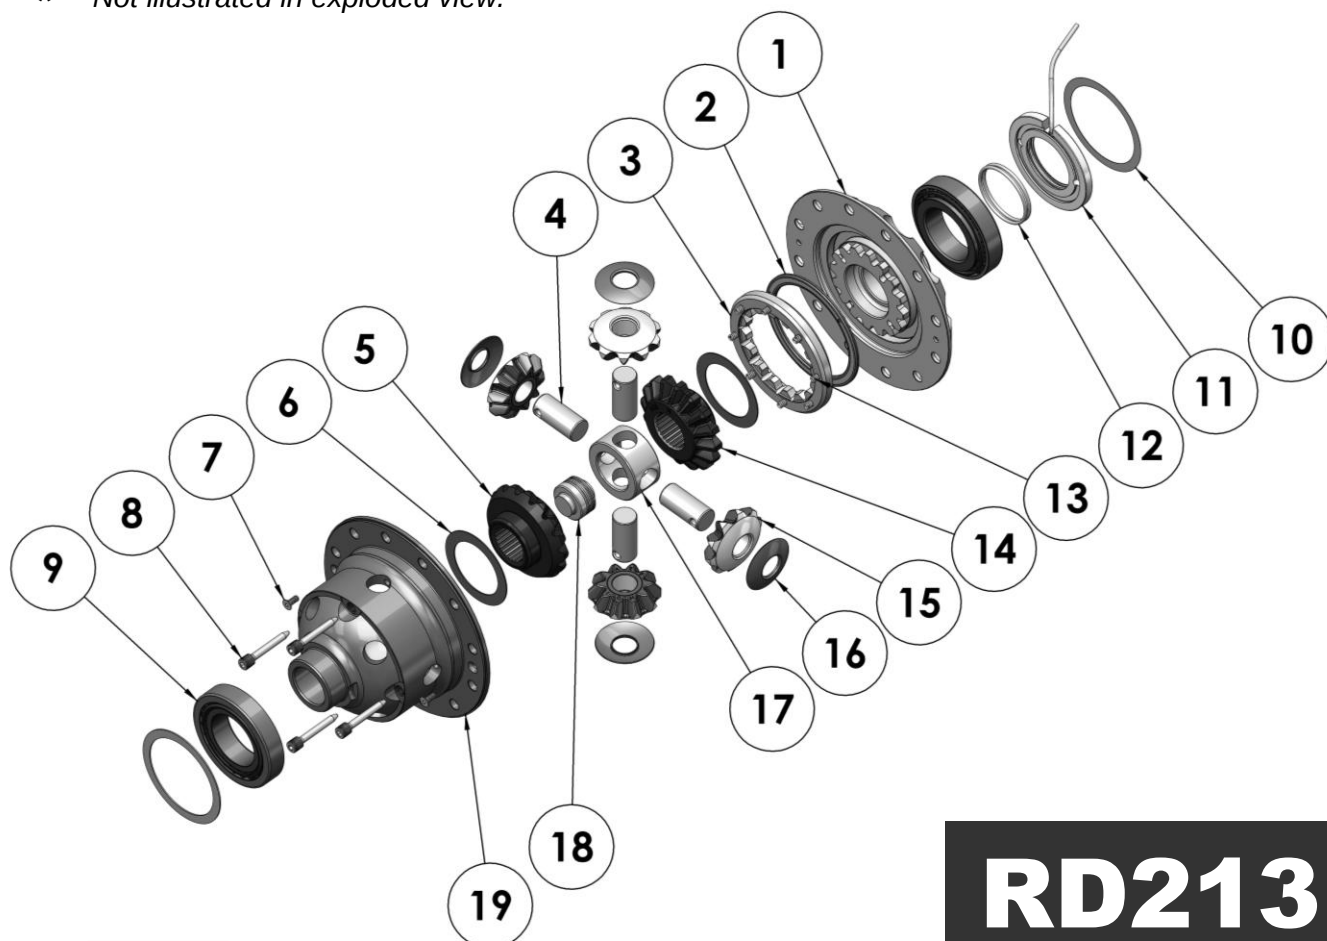

RD213

