




C12000 TDSC/TDSi

12000LB 12V/24V ELECTRIC WINCH

The 'bigger brother' of the 9500TDS. The 12000lb model can deliver 5.4 tonnes of raw power with more than 30% less current draw than its rivals. The innovative external break and highly efficient 6.0hp motor ensure this is the ideal choice for heavy duty applications. Also available in the TDSi "bridge type".

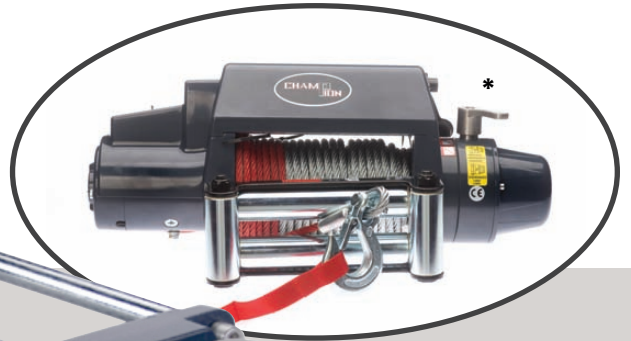

*TDSi bridge type.

STANDARD ACCESSORIES

- 30m x 9mm steel cable
- 5m Remote Handset
- Heavy Duty Roller Fairlead
- Heavy Duty Battery Leads
- Mounting hardware
- 5/16 hook

OUTSTANDING FEATURES

- Power in and Power out
- High Quality 6.5hp Series Wound motor
- H D Waterproof Contactors
- Full Steel Planetary Gearing
- Double sealed motor and drum
- Full Load Holding Brake
- Stainless Steel fairlead & Fittings
- Integrated Wireless Remote

SPECIFICATION

RATED LINE PULL: 12 000lbs (5400kg)
MOTOR: 12v : 6.0hp / 4.2kw
GEARING: 254:1
BRAKING ACTION: Auto double tapered
DRUM SIZE Dia x L: 63.5 x 229mm
CABLE Dia x L: 9mm x 30m
MOUNTING PATTERN: 254 x 114.3mm
DIMENSIONS: 670 x 215 x 294mm
WEIGHT: 52kg

TECHNICAL PERFORMANCE

Layer of wire rope	Line pull lbs (kg)
1	12000 (5443)
2	9787 (4445)
3	8273 (3760)
4	7199 (3255)

Line pull lbs (kg)	Line speed		Amp draw	
	ft/min	m/min	12v	24v
0	9.3	9.0	60	40
2000 (907)	13.0	4.0	116	87
6000 (2727)	7.9	2.4	178	129
8000 (3636)	6.9	2.1	224	165
12000 (5443)	4.5	1.4	285	217