



GO PREPARED™

2012-13 PRODUCT AND APPLICATION GUIDE



TRUCK, SUV, AND JEEP • POWERSPORTS • INDUSTRIAL AND COMMERCIAL



THREE BIG WORDS: COUNT ON WARN

HOW MANY TIMES have you been four-wheeling and something goes wrong? A part fails. Terrain gets tougher. Mother Nature unleashes weather. And you have to count on one thing. Your WARN winch. Year after year (more than 60, actually), the best of the best rely on WARN products. Such dependability doesn't come easy. This year, the people at Warn Industries continue to pour all they've got into bringing you products worthy of the WARN name. Like the XT17 Portable Winch. And the new Spydura™ synthetic winch rope, now available on a full range of popular winch models. Plus, we're introducing rugged new bumpers for the Jeep JK and TJ. And now, for the first time, every inch of WARN reliability has been crammed into an entry-level winch...the much-anticipated WARN VR. Whether your passion in life is off-roading, or simply heading out to hunt, play, or work, the original badge of honor—the WARN red logo—belongs on your rig. So go ahead—put our stuff to work. Go Prepared. Nothing we make will let you down.



Industrial, Severe Duty,
and Commercial: 91-112



Truck, SUV, and Jeep: 4-67
Applications by vehicle platform: 113-130



Powersports: 68-74
Applications by vehicle platform: 131-141

MOAB: Devil's Crack on the Moab Rim Trail. It's called Devil's Crack for good reason. Better bring your lockers, your WARN Rock Crawler Bumper and winch, and leave the fear of heights at home.

STEENS MTN., ROAD TO MICKEY BASIN. When you play where there's no mobile service, no 911, no tow trucks, and no pavement, you better Go Prepared.

OFF-ROAD PRODUCTS

WARN TRUCK, JEEP & SUV: TRUSTED OFF-ROAD COMPANIONS

Reliability meets durability head on with every WARN off-road product. Our authentic products bear the red “W” that says you’re a true enthusiast. You’ll find we have smart new products, like the VR winches at entry-level prices. And an ever-growing winch line-up – many winches now have synthetic rope options. Plus enough hubs, lights, body armor and bumpers to supply the world of adventure.

Winches.....	4-27
Mounting Systems, Bumpers, and Armor	28-51
Accessories.....	52-59
Lights, Flares, and Hubs	60-67
Applications by Vehicle Platform	113-130

WARN POWERSPORTS: GEARED UP FOR GOOD TIMES

This year, it’s WARN to the rescue with an ever-expanding line of portable winches. Small powerhouses meant to go with you anywhere – whether you have a quad, side-by-side, motorcycle, or snowmobile. We’ve also got all the powersports lights, bumpers, plow systems and accessory gear you need, to help you tackle the biggest jobs, or rescue yourself from the toughest situations.

Winches.....	69-74
Accessories.....	75-76
Mounting Systems and Bumpers	77-79
Body Armor	80
Lights.....	81-83
Plows and Plow Accessories	84-89
Applications by Vehicle Platform	131-141



Powerful Torque. Legendary Reliability.

Every winch in the WARN® lineup is designed and built to meet the demanding standards set by the WARN name.

At Warn Industries, the people who design and engineer your winches are enthusiasts at heart. They hear what off-roaders want in a winch.

This year, that means a new winch lineup packed with innovations, like durable contactor controls and a new generation of extra-rugged remotes. Plus, we're introducing the new WARN® VR Series – a line of entry-level winches that make WARN dependability accessible to everyone.



HEAVY WEIGHT SERIES BIG WINCHES FOR BIG TRUCKS.

The brute strength that heavier trucks and SUVs need. Featuring pulling capacities of up to 16,500 lbs. and higher strength carrier plates to handle heavy geartrain stresses, these winches are the most powerful in the WARN line-up.

16.5ti	Page 6
All backed by the WARN M15000.....	Page 8
Limited Lifetime Warranty. M12000.....	Page 9

* For warranty information on products sold outside of North America, see your in-country Authorized WARN Distributor. Go to www.warn.com for the latest listing of Authorized WARN Distributors.



ULTIMATE PERFORMANCE SERIES FOR THOSE WHO EAT, SLEEP AND DREAM OFF-ROADING

Ambitious. Advanced. Tough-as-nails. Revolutionary technology fuels the best winches on the market today. No-compromise construction, extreme sealing and the highest in performance and reliability make them a perfect match for the serious off-roader. All deliver superior duty cycle with improved motor life. Backed by the WARN Limited Lifetime Warranty.

PowerPlant	Page 10
Endurance 12.0 ...	Page 12
9.5xp	Page 13
9.5cti.....	Page 14
9.0Rc.....	Page 16



PREMIUM SERIES CLASSIC DESIGN. PROVEN PERFORMANCE.

These popular winches have been chewing up the competition for years. Pulling capacities of up to 9,000 lbs. and compact, efficient, and effective designs have made these cult favorites. Includes the WARN Limited Lifetime Warranty.

XD9000	Page 18
XD9000i	Page 19
M8274-50	Page 21
M8000.....	Page 22
M6000.....	Page 23



ENTRY LEVEL SERIES WORLD-CLASS WARN PERFORMANCE AT A VERY COMPETITIVE PRICE.

Don't let the phrase "Entry Level" fool you: These are dependable WARN winches through and through. With 8,000, 10,000, and 12,000 lb. capacities, the WARN Entry Level Series gives you everything you need in a winch, and nothing you don't. Includes the WARN Limited Lifetime Warranty.

VR12000	Page 25
VR10000	Page 26
VR8000	Page 27

WARN Spydura™ Synthetic Rope **NEW**

New this year – a series of popular winches equipped with high performance synthetic rope. WARN Spydura™ rope is constructed of a unique ultra high molecular weight polyethylene material. It offers high abrasion resistance and excellent tensile strength. Coated with urethane for increased UV and chemical resistance, WARN Spydura™ rope includes a high-temperature-resistant sleeve on the first layer, and a unique self-tightening rope attachment designed to hold the rope secure on the winch drum. A ballistic nylon sliding sleeve provides extra protection against abrasion and wear. Now available on the WARN 9.5cti-s, 9.5xp-s, M8000-s, VR8000-s, and VR10000-s winch models.



SWEET HOME, OR. Yeah, it's Mud Fest for a reason. It's hard-core through and through. So are we. If you bury a Dodge Ram this far, you better bring your WARN winch.



HEAVY WEIGHT
WINCH SERIES



WARN 16.5ti Highest capacity, most technologically advanced winch for big trucks

The 16.5ti features the full diagnostic ability of WARN thermometric technology, plus the extreme sealing, durability, and reliability that the WARN ti-series of winches are known for. Series-wound motor combined with a 3-stage planetary geartrain delivers 16,500 lbs. of pulling power. Thermometric indicator LED provides operator feedback on motor temperature.

- Extreme-duty sealing helps protect the winch from the outside elements
- Series-wound, high-speed motor provides fast line speed and strong pulls
- Exclusive brake design provides superior control while winching
- Aluminum control box cover for added protection of the electronics
- Durable 3-stage planetary geartrain for smooth, reliable, operation

- Remote control with 12' (3.7m) lead and thermometric LED indicator for operator feedback
- Chip-resistant powder-coated finish with primer undercoating for superior corrosion protection
- 90' of 7/16" (27m of 11mm) diameter wire rope


PN 68801

SPECIFICATIONS:

Winch model: 16.5ti
Part number: 68801
Rated line pull: 16,500 lbs. (7484 kgs) single-line
Motor: 12V 4.6 hp, series wound
Electrical controls: Contactor
Remote control: Remote switch, with LED indicator 12' (3.7m) lead
Geartrain: 3-stage planetary
Gear ratio: 315:1
Clutch (freespooling): Rotating ring gear
Brake: Automatic direct drive cone
Wire rope: 90', 7/16" diameter (27m, 11mm diam.)
Fairlead: Roller
Recommended battery: 650 CCA minimum for winching
Battery leads: 2 gauge, 72" (1.83m)
Finish: High-gloss powder coat over primer undercoating
Drum diameter/length: 3.5"/8.2" (9cm/21cm)
Weight: 138 lbs. (63 kgs)

12V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	23.6 (7.20)	68 amps	1/16500 (7484)
2000 (907)	12.07 (3.68)	138 amps	2/15279 (6930)
4000 (1814)	9.22 (2.81)	189 amps	3/12672 (5748)
6000 (2721)	7.37 (2.25)	240 amps	4/10824 (4910)
8000 (3628)	6.08 (1.85)	291 amps	
10000 (4536)	5.12 (1.56)	342 amps	
12000 (5443)	4.40 (1.34)	393 amps	
14000 (6350)	3.86 (1.18)	444 amps	
16000 (7257)	3.38 (1.03)	494 amps	
16500 (7484)	3.24 (0.99)	507 amps	

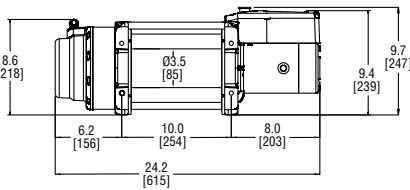

Winch dimensions:
24.2" L. x 8.5" D. x 9.7" H.
(628mm L. x 216mm D. x 247mm H.)

Mounting bolt pattern:
10.0" x 4.5" (254mm x 114.3mm)

MOJAVE DESERT. What do you get when you mix a Ford Super Duty with a WARN Gen II Transamer® W-Series lights, and a WARN 16.5ti winch? A tireless King of the Hammers support vehicle.





WARN M15000 Enough capacity for the heaviest loads

- A heavy-duty 15,000 lb. capacity winch with a 4.6hp series-wound motor. Direct drive cone braking system. Control pack is designed for clearance and ease of access. Large-frame architecture means this winch will stand up to the stresses of heavy winching.
- High strength carrier plates are designed to handle heavy geartrain stresses
 - Series-wound, high-speed motor provides fast line speed and strong pulls
 - Brake provides superior control while winching
 - Remote-mount control box allows for various mounting options
- Durable 3-stage planetary geartrain for smooth, reliable, operation
 - Remote control with 12' (3.7m) lead
 - Chip-resistant powder-coated finish
 - 90' of 7/16" (27m of 11mm) diameter wire rope

PN 47801

SPECIFICATIONS:

Winch model: M15000

Part numbers: 47801 (12V), 478022 (24V)

Rated line pull: 15000 lbs., (6804 kgs) single-line

Motor: Series wound, 12V 4.6 hp, 24V 2.5 hp

Electrical controls: Contactor

Remote Control: Remote switch, 12' (3.7m) lead

Geartrain: 3-stage planetary

Gear ratio: 315:1

Clutch (freespooling): Rotating Ring Gear

Brake: Automatic direct drive cone

Drum diameter/Length: 3.5"/8.2" (9cm/21cm)

Weight: 136 lbs. (62 kgs)


Wire rope: 90', 7/16" (27m, 11mm) diameter

Fairlead: Roller

Recommended battery: 650 CCA minimum for winching

Battery leads: 2 gauge, 72" (1.83m)

Finish: Argent gray powder coat

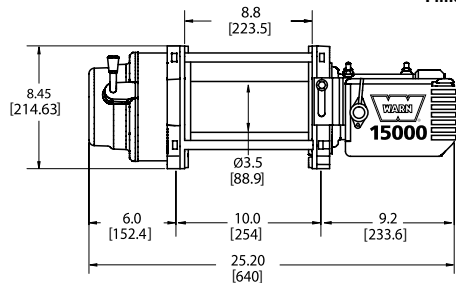

Winch Dimensions:
25.2" L. x 8.5" D. x 11" H.
(556mm L. x 215mm D. x 279mm H.)

Mounting Bolt Pattern:
10.0" x 4.5"
(254mm x 114.3mm)

12V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	22.2 (6.77)	67 amps	1/15000 (6804)
2000 (910)	7.27 (2.22)	135 amps	2/13890 (6300)
4000 (1810)	5.41 (1.65)	185 amps	3/11520 (5225)
6000 (2720)	4.43 (1.35)	235 amps	4/9840 (4463)
8000 (3630)	3.79 (1.16)	285 amps	
10000 (4540)	3.31 (1.01)	335 amps	
12000 (5440)	2.93 (.893)	385 amps	
14000 (6350)	2.61 (.796)	435 amps	
15000 (6800)	2.48 (.756)	460 amps	

24V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	28 (8.6)	24 amps	1/15000 (6800)
2200 (1000)	10.2 (3.1)	85 amps	2/13900 (6300)
4400 (2000)	7.5 (2.3)	115 amps	3/11400 (5200)
6600 (3000)	6.9 (2.1)	142 amps	4/9700 (4400)
8800 (4000)	6.6 (2.0)	170 amps	
11000 (5000)	6.2 (1.9)	190 amps	
13200 (6000)	5.2 (1.6)	210 amps	
15000 (6800)	4.3 (1.3)	235 amps	



WARN M12000 A reliable workhorse to meet heavy winching needs

- Big torque, power, and fast no-load retrieval speed. 3-stage planetary geartrain combined with a 4.6hp series wound motor produce 12,000 lbs. of pulling power. Low profile design so it fits where you want it.
- Large frame winch design to handle heavier winch loads
 - Series wound, high-speed motor provides fast line speed and strong pulls
 - Brake provides superior control while winching
 - Remote-mount control box allows for various mounting options
- Durable 3-stage planetary geartrain for smooth, reliable, operation
 - Remote control with 12' (3.7m) lead
 - Chip-resistant powder-coated finish
 - 125' of 3/8" (38m of 9.5mm) diameter wire rope

PN 17801 (12V), PN 265072 (24V),
PN 87801 (CE, International sales only, 12V)

SPECIFICATIONS:

Winch model: M12000

Part numbers: 17801 (12V), 265072 (24V), 87801(CE)

Rated line pull: 12000 lbs., (5440 kgs) single-line

Motor: Series wound, 12V 4.6 hp, 24V 2.5 hp

Electrical controls: Contactor

Remote Control: Remote switch, 12' (3.7m) lead

Geartrain: 3-Stage planetary

Gear ratio: 261:1

Clutch (freespooling): Rotating ring gear

Brake: Automatic direct drive cone

Drum diameter/Length: 3.5"/8.2" (9cm/21cm)

Weight: 136 lbs. (62kgs)


Wire rope: 125', 3/8" diameter (38m, 9.5mm diam.)

Fairlead: Roller

Recommended battery: 650 CCA minimum for winching

Battery leads: 2 gauge, 72" (1.83m)

Finish: Argent gray powder coat

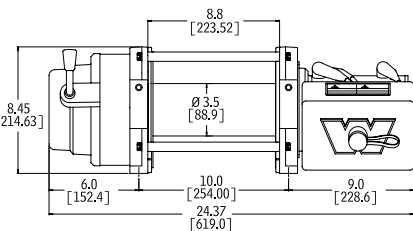

Winch Dimensions:
24.37" L. x 8.45" D. x 11" H.
(619mm L. x 214.63mm D. x 279mm H.)

Mounting Bolt Pattern:
10.0" x 4.5"
(254mm x 114.3mm)

12V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	30 (9.14)	67 amps	1/12000 (5443)
2000 (910)	14 (4.27)	140 amps	2/11120 (5044)
4000 (1810)	8.62 (2.63)	210 amps	3/10340 (4690)
6000 (2720)	6.92 (2.11)	250 amps	4/9770 (4432)
8000 (3630)	5.80 (1.77)	320 amps	5/9250 (4196)
10000 (4540)	4.39 (1.34)	370 amps	
12000 (5440)	3.86 (1.18)	440 amps	

24V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	31.94 (9.57)	24 amps	1/12000 (5443)
2000 (910)	11.7 (3.57)	105 amps	2/11120 (5044)
4000 (1810)	9.5 (2.90)	129 amps	3/10340 (4690)
6000 (2720)	8.5 (2.59)	152 amps	4/9770 (4432)
8000 (3630)	7.5 (2.29)	175 amps	5/9250 (4196)
10000 (4540)	6.5 (1.98)	198 amps	
12000 (5440)	6.0 (1.83)	221 amps	



PowerPlant™ Dual Force
Winch and compressor in one compact unit

Versatility times two. A best-in-class air compressor and a powerful WARN winch in one versatile unit. Whether you’re winching and airing up while off-roading; inflating a raft or air mattress; or running a nail gun or impact wrench; the PowerPlant is the way to get things done.



- Winch features a 3-stage planetary gear train, series wound motor with thermal protection switch, free-spooling clutch, integrated direct-drive cone brake
- Available in two configurations: PowerPlant HP: 9,500 lbs. pulling capacity, 125' of 5/16" (38m of 8mm) wire rope, fast line speeds; PowerPlant HD: 12,000 lbs. pulling capacity, 80' of 3/8" (24m of 9.5mm) wire rope, long duty cycle
- Air compressor delivers enough air to operate a variety of air tools or quickly inflate a raft. Max air pressure: 100 PSI, CFM rating: 12 CFM @ 0 PSI, 5 CFM @ 90 PSI. Onboard features include: integrated intercooler, pressure switch, thermal protection shutoff switch and air hose quick disconnect
- Includes next-generation remote control, hose, and basic air fittings and couplings

PN 71800 (PowerPlant HP)
PN 71801 (PowerPlant HD)

SPECIFICATIONS:

Part numbers: PowerPlant HD -- 71801 (12V)
PowerPlant HP -- 71800 (12V)

Rated line pull: PowerPlant HD --12,000 lbs., (5440 kgs)
PowerPlant HP -- 9,500 lbs., (4310 kgs)

Motor: Gen II Series wound 4.6 hp 12V, with thermal protection shutoff switch

Electrical controls: Contactor

Remote control: Remote switch with thermometric LED and 12' (3.7m) lead

Geartrain: 3-stage planetary

Gear ratio: PowerPlant HD --216:1,
PowerPlant HP -- 156:1

Clutch (freespooling): Sliding ring gear

Brake: Integrated direct-drive cone brake

Wire rope:
PowerPlant HD -- 80' of 3/8" (24m of 9.5mm diam.)
PowerPlant HP -- 125' of 5/16" (38m of 8mm diam.)

Fairlead: Roller

Recommended battery: 650 CCA minimum

Battery leads: 2 gauge, 72" (1.83m)

Finish: High-gloss black powdercoat

Drum diameter/Length: 2.5"/9" (6.4cm/23cm)

Weight: PowerPlant HD --115 lbs (52 kgs)
PowerPlant HP -- 100 lbs (45 kgs)

Compressor

Air Reservoir:
1/2 gallon with Integrated
Air Intercooler

High Air Flow Rating:
12 CFM @ 0 psi, 5 CFM
@ 90 psi

Max Air Pressure: 100 psi

Air Pressure Switch: Yes

Air Hose: 12' nylon, with
quick-disconnect.
Brass air fittings and
couplings

Dimensions:
24.31" L. x 6.7" D. x 13.46" H.
(617mm L. x 170mm D. x 342mm H.)

Mounting bolt pattern:
10.0" x 4.5"
(254mm x 114.3mm)

See warn.com for
drawing showing
winch dimensions

12V DC performance specs (PowerPlant HD, first layer)			
Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	20.5 (6.25)	89 amps	1/12,000 (5440)
2000 (910)	11.7 (3.57)	153 amps	2/9517 (4317)
4000 (1810)	8.6 (2.61)	207 amps	3/7886 (3577)
6000 (2720)	6.7 (2.04)	265 amps	4/6732 (3054)
8000 (3630)	5.4 (1.65)	318 amps	
9500 (4310)	4.4 (1.34)	370 amps	
12000 (5440)	3.6 (1.10)	416 amps	

12V DC performance specs (PowerPlant HP first layer)			
Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	26.9 (8.2)	88 amps	1/9500 (4313)
2000 (910)	14.6 (4.45)	195 amps	2/8650 (4927)
4000 (1810)	10.3 (3.14)	262 amps	3/7920 (3595)
6000 (2720)	7.8 (2.38)	345 amps	4/7400 (3359)
8000 (3630)	6.1 (1.86)	420 amps	5/6940 (3150)
9500 (4310)	5.2 (1.58)	454 amps	

Note: Auxiliary air tank required to operate some types of air tools



MOAB: BEHIND THE ROCKS TRAIL. Air up and air down
as much as you want when you're running with a WARN
PowerPlant. It's the easy way to carry air on-board.



ULTIMATE
PERFORMANCE
WINCH SERIES



WARN Endurance 12.0
More power. More speed. More endurance.

The WARN Endurance 12.0 gives you 12,000 lbs. of pulling capacity with the longest duty cycle of any electric winch on the market today. The specially designed cooling fan automatically turns on when the winch’s motor reaches a certain temperature.

- Remote-mount fan: Cools winch motor for longer duty cycle. Fan has automatic or manual activation
- Contactor: Sealed and water resistant. Highly reliable; handles high current and allows for long duty cycle
- Remote control: Weather-resistant remote with 12’ (3.7m) lead and fan activation switch
- Stainless-steel clutch lever/hardware: Superior corrosion resistance
- 3-Stage planetary geartrain: Most reliable and efficient gear reduction system available
- Mechanical brake: Industry-leading patented brake design
- Long wire rope: 80’ of 3/8” (24m of 9.5mm) durable, easy-to-wind wire rope



PN 73010 (12V)

SPECIFICATIONS:

Winch model: Endurance 12.0

Part numbers:
73010 (12V)

Rated line pull: 12,000 lbs., (5440 kgs) single-line

Motor: Series wound 4.6 hp 12V

Electrical controls: Contactor

Remote control: Remote switch, 12’ (3.7m) lead

Geartrain: 3-stage planetary

Gear ratio: 216:1

Clutch (freespooling): Sliding ring gear

Brake: Mechanical cone brake

Wire rope: 80’ of 3/8” (24m of 9.5mm diam.)

Fairlead: Roller

Recommended battery: 650 CCA minimum for winching

Battery leads: 2 gauge, 72” (1.83m)


Finish: High-gloss powder coat over primer undercoating

Drum diameter/Length: 2.5”/9.0” (6.4cm/23cm)

Weight: 100 lbs. (45 kgs)

12V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (Kgs.)
0	39.5 (12.0)	47.8 amps	1/12,000 (5440)
2000 (910)	15.1 (4.60)	127.0 amps	2/9517 (4317)
4000 (1810)	10.4 (3.17)	192.0 amps	3/7886 (3577)
6000 (2720)	7.7 (2.35)	257.0 amps	4/6732 (3054)
8000 (3630)	6.1 (1.86)	316.0 amps	
9500 (4310)	4.8 (1.46)	358.0 amps	
12000 (5440)	3.4 (1.04)	429.0 amps	

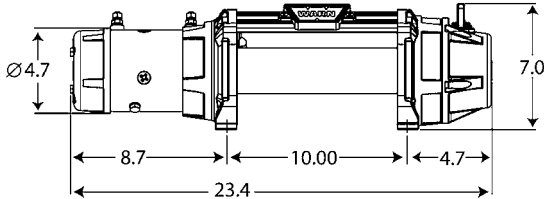

Winch dimensions:
23.4” L. x 6.3” D. x 7.0” H.
(594mm L. x 162.5mm D. x 178mm H.)

Mounting bolt pattern:
10.0” x 4.5” (254mm x 114.3mm)

ULTIMATE
PERFORMANCE
WINCH SERIES



The 9.5xp-s winch features WARN Spydura™ rope. Includes a ballistic nylon sliding sleeve that provides extra rope protection against abrasion and wear, and a polished aluminum hawse fairlead.

WARN 9.5xp Fast, powerful and reliable – for extreme conditions

The fast, powerful 9.5xp Extreme Performance winch is designed for the serious off-roader who demands a winch that will perform under the most extreme conditions in the world. With 9,500 lbs. of pulling power and the fastest line speed of any WARN winch under load, the 9.5xp delivers extreme performance that eats up the competition—even in competition.

- Now available in two versions: wire rope with roller fairlead, or WARN Spydura™ synthetic rope with polished aluminum hawse fairlead
- High-output parallel series wound winch motor is the strongest and most durable in the industry
- Extreme-duty winch sealing. Enables superior water resistance
- Exclusive brake design. Provides superior operator control when winching
- Extended-duty control pack delivers long duty cycle to help you tackle the most demanding pulls

- 3-Stage planetary geartrain. Proven to be the most reliable efficient and durable design
- Remote-mount, next-generation control box allows for various mounting options
- Remote control with 12’ (3.7m) lead
- High gloss, chip-resistant powder coat finish. Provides superior corrosion resistance
- 100’ of steel or synthetic winch rope

PN 68500 (9.5xp, wire rope, roller fairlead, 12V)

PN 87310 (9.5xp-s, synthetic rope, hawse fairlead, 12V)

SPECIFICATIONS:

Winch model: 9.5xp, 9.5xp-s

Part numbers: 68500 (wire rope, 12V), 86500 (wire rope, CE, International sales only), 87310 (9.5xp-s, synthetic rope, 12V)

Rated line pull: 9,500 lbs., (4310 kgs.) single-line

Motor: 12V 6 hp (4.48kw), High output parallel series wound

Electrical controls: Contactor

Remote control: Remote switch, 12’ (3.7m) lead

Geartrain: 3-stage planetary

Gear ratio: 156:1

Clutch (freespooling): Sliding ring gear

Brake: Automatic direct drive cone

Rope: Steel -- 100’, 5/16” diameter (30m, 8mm diam.)

Spydura™ synthetic -- 100’, 3/8” diameter (30m, 9.5mm diam.)

Fairlead: PN 68500/86500, roller fairlead

PN 87310, polished aluminum hawse fairlead

Recommended battery: 650 CCA minimum for winching

Battery leads: 2 gauge, 72” (1.83m)

Finish: High-gloss powder coat over primer undercoating


Drum diameter/Length: 2.5”/9.0” (6.4cm/23cm)

Weight: PN 68500/86500 – 87 lbs. (39.5 kgs)

PN 87310 – 68 lbs. (30.8 kgs)

12V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	38 (11.6)	70 amps	1/9500 (4313)
2000 (910)	16.8 (5.1)	175 amps	2/8650 (4927)
4000 (1810)	12.8 (3.9)	262 amps	3/7920 (3595)
6000 (2720)	10.1 (3.1)	335 amps	4/7400 (3359)
8000 (3630)	8.8 (2.7)	425 amps	5/6940 (3150)
9500 (4310)	7.6 (2.3)	480 amps	

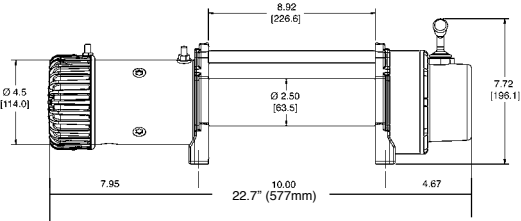

Winch dimensions:
22.7” L. x 6.3” D. x 7.7” H.
(577mm L. x 160mm D. x 196mm H.)

Mounting bolt pattern:
10.0” x 4.5” (254mm x 114.3mm)

ULTIMATE
PERFORMANCE
WINCH SERIES



The 9.5cti-s winch features WARN Spydura™ rope. Includes a ballistic nylon sliding sleeve that provides extra rope protection against abrasion and wear, and a polished aluminum hawse fairlead.

WARN 9.5cti Contactor equipped, thermometric winch

The 9.5cti is the newest addition to the WARN Ultimate Performance winch lineup. A massive protective structure combined with sophisticated operator feedback delivers fast line speeds, and long duty cycles. The perfect winch for the serious off-roader.

- Now available in two versions: wire rope with roller fairlead, or WARN Spydura™ synthetic rope with polished aluminum hawse fairlead
- New contactor control features exceptional durability, extra long life, and superior weather sealing
- Motor-mounted thermal sensor relays temperature information to winch operator by way of the hand-held remote control with LED indicator
- Redesigned remote control with thermometric indicator light
- Series-wound motor and 3-stage planetary geartrain deliver 9,500 lbs. of pulling capacity
- Extreme-duty winch sealing system
- High gloss, chip-resistant black powder coat finish over a massive cast-aluminum alloy housing
- Comes with steel or synthetic winch rope, hook, remote control on 12' (3.7m) lead, and roller or hawse fairlead



PORTABLE OPTION. Also available in the Multi-Mount portable winch configuration – wire rope and steel hawse fairlead with quick connect wiring and carrier

PN 97550 (9.5cti, with wire rope and roller fairlead), **PN 85760** (9.5cti Multi-Mount, with wire rope, steel hawse fairlead, and quick-connect wiring), **PN 85757** (9.5cti Multi-Mount for the H2 Hummer, wire rope), **PN 97600** (9.5cti-s, with synthetic rope and aluminum hawse fairlead)

SPECIFICATIONS:

Winch model: 9.5cti, 9.5cti-s

Part numbers: 97550 (9.5cti, wire rope), 85760 (9.5cti Multi-Mount with wire rope), 97600 (9.5cti, Spydura™ synthetic rope)

Rated line pull: 9,500 lbs., (4310 kgs) single-line

Motor: Series wound

Electrical controls: Contactor

Remote Control: Remote switch, LED indicator, 12' (3.7m) lead

Geartrain: 3-Stage planetary

Gear ratio: 156:1

Clutch (freespooling): Sliding ring gear

Brake: Automatic direct drive cone

Drum diameter/Length: 2.5"/9.0" (6.4 cm/23 cm)

Weight: PN 97550/85760, 89 lbs. (36.3 kgs); PN 97600, 66 lbs. (30.0 kgs)

Rope: Steel -- 125', 5/16" diameter (38m, 8mm diam.)
Synthetic -- 100', 3/8" diameter (30m, 9.5mm diam.)

Fairlead: 97550 (roller), 85760 (cast steel hawse), 97600 (polished aluminum hawse)

Recommended battery: 650 CCA minimum for winching

Battery leads: 2 gauge, 72" (1.83m)


Finish: High-gloss powder coat over primer undercoating

Mounting bolt pattern: 10.0" x 4.5" (254mm x 114.3mm)

Winch dimensions: 23.1" L. x 6.3" D. x 10.4" H. (587mm L. x 160mm D. x 264mm H.)

12V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	62 (18.9)	47 amps	1/9500 (4313)
2000 (910)	16.3 (4.97)	160 amps	2/8650 (3927)
4000 (1810)	11.8 (3.60)	230 amps	3/7920 (3595)
6000 (2720)	9.31 (2.84)	305 amps	4/7400 (3359)
8000 (3630)	7.59 (2.31)	370 amps	5/6940 (3150)
9500 (4310)	6.67 (2.03)	425 amps	

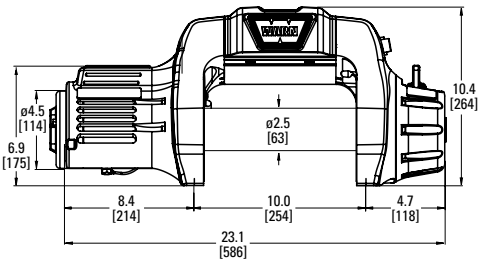

MOAB. Descent on some of these Moab trails causes some to burn up their brakes, and others to cry for help. But it's old hat to our international customer service rep. He eats tight turns and steep ledges for lunch.





EAST OF TWENTYNINE PALMS, CA. The rig is built to do one thing: rock racing. With a WARN 9.0Rc winch leading the way, it's a big-time competitor at the King of the Hammers.



WARN 9.0Rc A compact, lightweight winch for rock sports


- Competitive rock sports means tackling tough climbs, intense approach angles, tight turns, and high speeds. That's why rock rigs need a low-profile, lightweight winch like the WARN 9.0Rc that delivers maximum power in a compact, 54-lb. unit. The 9.0Rc is a winch built for competitors looking for efficiency, reliability and legendary WARN performance.
- 4.8 hp series wound motor delivers 9,000 lbs. of pulling capacity, and fast line speed under load
 - Next-generation contactor control pack delivers long duty cycles and exceptional durability
 - New-style remote control
 - 50' of 3/8" (15m of 9.5mm) diameter WARN Spydura™ rope combined with a rugged, 360-degree swivel hook and thimble
- Ballistic nylon sliding sleeve that provides extra rope protection against abrasion and wear
 - Aluminum hawse fairlead
 - Exclusive multi-segment cam actuated brake for positive operator control during winching
 - Gloss red paint with primer undercoat gives superior corrosion resistance
- PN 71550**

SPECIFICATIONS:

- Winch model:** WARN 9.0Rc
Part numbers: 71550
Rated line pull: 9,000 lbs., (4080 kgs) single-line
Motor: Series wound, 12V 4.8 hp
Electrical controls: Contactor
Remote control: Remote switch, 12' (3.7m) lead
Geartrain: 3-Stage planetary
Gear ratio: 216:1
Clutch (freespooling): Sliding ring gear
Brake: Automatic direct drive cone
Drum diameter/Length: 2.75"/4.75" (7.0cm/12cm)
Weight: 54 lbs. (24.8kgs.)
Rope: 50', 3/8" (15m, 9.5mm) Spydura™ synthetic rope
Fairlead: Polished aluminum hawse
Recommended battery: 650 CCA minimum for winching
Battery leads: 2 gauge, 72" (1.83m)
Finish: Gloss red paint over primer undercoating

12V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	42 (12.8)	80 amps	1/9000 (4082)
2000	16 (4.88)	200 amps	2/7280 (3302)
4000	11.9 (3.63)	285 amps	3/6670 (3026)
6000	9.79 (2.98)	350 amps	4/6230 (2826)
8000	8.01 (2.44)	435 amps	
9000	6.4 (1.94)	465 amps	

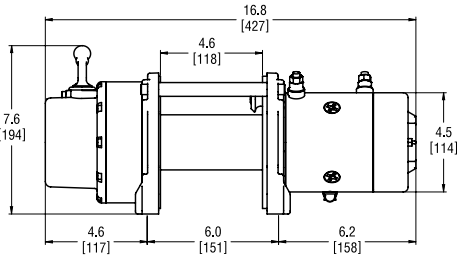

Winch dimensions:
16.8" L. x 6.3" D. x 7.6" H.
(427mm L. x 160mm D. x 194mm H.)

Mounting bolt pattern:
6" x 4.5" (151mm x 114.3mm)





WARN XD9000 Long time best selling winch

The XD9000 is fast and reliable in real trail conditions. The compact body and separate control pack lets it work effectively in very tight spaces. It uses the 4.6-hp series-wound motor and three-stage planetary gearing offered on most of our winches, so torque and line speed are outstanding.

- Next-generation contactor control pack delivers long duty cycles and exceptional durability
- New design hand-held remote control
- Low-profile design and separate control box allows for a wide range of mounting options
- Exclusive brake design provides superior control while winching

- Durable 3-stage planetary geartrain for smooth, reliable, operation
- Series-wound, high-speed motor provides fast line speed and strong pulls
- Chip-resistant, powder-coated finish
- 100' of 5/16" (30m of 8mm) diameter wire rope

PN 28500 (12V)
PN 88500 (12V, CE, International sales only)
PN 265012 (24V)

SPECIFICATIONS:

Winch model: XD9000

Part numbers: 28500 (12V), 88500 (12V, CE, International sales only), 265012 (24V)

Rated line pull: 9,000 lbs., (4080 kgs) single-line

Motor: Series wound: 12V 4.6 hp, 24V 2.5 hp

Electrical controls: Contactor

Remote control: Remote switch, 12' (3.7m) lead

Geartrain: 3-Stage Planetary

Gear ratio: 156:1

Clutch (freespooling): Sliding ring gear

Brake: Automatic Direct Drive Cone

Drum diameter/Length: 2.5"/9.0" (6.4cm/23cm)

Weight: 78 lbs. (35kgs)

Wire rope: 100', 5/16" dia. (30m, 8mm)

Fairlead: Roller

Recommended Battery: 650 CCA minimum for winching

Battery leads: 2 gauge, 72" (1.83m)


Finish: Argent Gray Powder Coat

12V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	38 (11.6)	70 amps	1/9000 (4082)
2000 (910)	14.4 (4.39)	180 amps	2/8190 (3715)
4000 (1810)	11 (3.35)	255 amps	3/7500 (3402)
6000 (2720)	8.67 (2.64)	330 amps	4/7010 (3180)
8000 (3630)	6.88 (2.10)	415 amps	
9000 (4080)	6.38 (1.94)	460 amps	

24V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	22.5 (6.86)	46 amps	1/9000 (4082)
2000 (910)	14.5 (4.42)	93 amps	2/8190 (3715)
4000 (1810)	11 (3.35)	131 amps	3/7500 (3402)
6000 (2720)	9.1 (2.77)	169 amps	4/7010 (3180)
8000 (3630)	7.9 (2.41)	207 amps	5/6570 (2980)
9000 (4080)	7.4 (2.26)	226 amps	

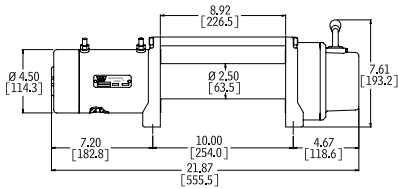

Winch Dimensions:
21.8" L. x 6.3" D. x 7.6" H.
(555mm L. x 160mm D. x 193mm H.)

Mounting Bolt Pattern:
10.0" x 4.5" (254mm x 114.3mm)



WARN XD9000i Fast and reliable in real trail conditions

The XD9000i features an integrated control pack and all-metal housing, which protects the winch's electrical components the way a roll cage protects you. No-load line speed is 38-feet per minute. An efficient 3-stage planetary gear train and series-wound motor allow this winch to run cool with low amp draw for long duty cycles.

- Integrated control box provides excellent protection to electronics
- Exclusive brake design provides superior control while winching
- Durable 3-stage planetary geartrain for smooth, reliable, operation
- Series-wound, high-speed motor provides fast line speed and strong pulls
- Next-generation remote control with 12' (3.7m) lead
- 125' of 5/16" (38m of 8mm) diameter wire rope

PN 27550 (12V)
PN 37441 (Multi-Mount)



PORTABLE OPTION
Available in the Multi-Mount portable winch configuration. Includes winch, carrier, remote, and quick-connect wiring.

SPECIFICATIONS:

Winch model: XD9000i

Part numbers: 27550, 37441 (Multi-Mount)

Rated line pull: 9,000 lbs., (4080 kgs) single-line

Motor: Series-wound 12V 4.6 hp, 24V 2.5 hp

Electrical controls: Solenoid

Remote control: Remote switch, 12' (3.7m) lead

Geartrain: 3-Stage planetary

Gear ratio: 156:1

Clutch (freespooling): Sliding Ring Gear

Brake: Automatic Direct Drive Cone

Drum diameter/Length: 2.5"/9.0" (6.4cm/23cm)

Weight: 85 lbs. (38.5 kgs)

Wire rope: 125', 5/16" dia. (38m, 8mm)

Fairlead: Roller (Multi-Mount kit includes hawse fairlead)

Recommended battery: 650 CCA minimum for winching

Battery leads: 2 gauge, 72" (1.83m)


Finish: Argent gray powder coat

12V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	38 (11.6)	70 amps	1/9000 (4082)
2000 (910)	14.4 (4.39)	180 amps	2/8190 (3715)
4000 (1810)	11 (3.35)	255 amps	3/7500 (3402)
6000 (2720)	8.67 (2.64)	330 amps	4/7010 (3180)
8000 (3630)	6.88 (2.10)	415 amps	
9000 (4080)	6.38 (1.94)	460 amps	

Winch dimensions:
23.1" L. x 6.3" D. x 10.0" H.
(587mm L. x 160mm D. x 254mm H.)

Mounting bolt pattern:
10.0" x 4.5" (254mm x 114.3mm)

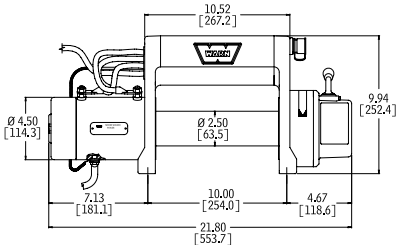



WARN M8274-50 Fastest line speed, longest wire rope, legendary performance

Loved by off-roaders who compete, it’s our fastest winch. No load retrieval speed for the M8274-50 is 73.4 feet per minute, and that’s not all. At 150 ft. of 5/16” cable, it also has a very long line capacity. Its unique spur-gear drivetrain and upright design are totally rugged. Its braking system delivers smooth operation with superior heat dissipation. Roller fairlead, remote control on 12-ft. lead, free spool clutch and battery cables are included.

PN 38631 (12V), **PN 88631** (12V, CE, International sales only), **PN 375832** (24V)

- Rugged spur-gear drivetrain and unique upright design
- Automatic disc braking system delivers smooth operation with superior heat dissipation
- Roller fairlead, new-design remote control, free spool clutch, and battery cables are included

SPECIFICATIONS:

Winch model: M8274-50

Part numbers: 38631 (12V), 88631 (12V, CE, International sales only), 375832 (24V)

Rated line pull: 8,000 lbs., (3628 kgs.) single-line

Motor: Series Wound, 12V 4.6 hp/3.43kw, 24V 2.5 hp/3.43kw

Electrical controls: Solenoid

Remote control: Remote switch, 12’ (3.7m) lead

Geartrain: Spur gear

Gear ratio: 134:1

Clutch (freespooling): Sliding motor pinion gear

Brake: Automatic disc type

Drum diameter/Length: 3.5”/8.5” (9cm/22cm)

Weight: 110 lbs. (50 kgs)


Wire rope: 150’, 5/16” diameter (46m, 8mm diam.)

Fairlead: Roller

Recommended battery: 650 CCA minimum for winching

Battery leads: 2 gauge, 72” (1.83m)

Finish: Powder coat with clear coat



12V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	73.4 (22.4)	55 amps	1/8000 (3629)
2000 (910)	22 (6.71)	190 amps	2/7460 (3384)
4000 (1810)	12 (3.66)	275 amps	3/6980 (3166)
6000 (2720)	9.50 (2.90)	350 amps	4/6620 (3003)
8000 (3630)	6.10 (1.86)	450 amps	5/6290 (2853)

24V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	65 (19.8)	24 amps	1/8000 (3629)
2000 (910)	23 (7.01)	96 amps	2/7460 (3384)
4000 (1810)	17 (5.18)	149 amps	3/6980 (3168)
6000 (2720)	13 (3.96)	203 amps	4/6620 (3005)
8000 (3630)	7.9 (2.41)	273 amps	5/6290 (2855)

Winch Dimensions: 16.5” L x 8.5” D x 15” H. (420mm L x 220mm D x 381mm H.)

Mounting Bolt Pattern: 10.0” x 4.5” (254mm x 114.3mm)

PREMIUM
WINCH SERIES

NEW



The M8000-s winch features Spydura™ synthetic rope. Includes a ballistic nylon sliding sleeve that provides extra rope protection against abrasion and wear, and a polished aluminum hawse fairlead.

WARN M8000 Compact, tough and reliable

The M8000 winch has been trusted by off-roaders for over twenty years. This 8,000 lb. capacity winch offers outstanding reliability and value. Its low-profile design allows for a variety of mounting options, making it perfect for most trucks, Jeeps and SUVs.

- Now available in two versions: wire rope with roller fairlead, or WARN Spydura™ synthetic rope with polished aluminum hawse fairlead
- Premium Series winch that delivers classic design, proven performance, and legendary WARN reliability
- New, next-generation electrical control box and hand-held remote control
- Low-profile design and separate control box allows for a wide range of mounting options
- Exclusive brake design provides superior control while winching

- Durable 3-stage planetary geartrain for smooth, reliable, operation
- Series-wound, high-speed motor provides fast line speed and strong pulls
- Chip-resistant powder-coated finish
- 100' of steel or synthetic rope

PN 26502 (wire rope, 12V)
PN 88502 (wire rope, 12V, CE, International sales only)
PN 265032 (wire rope, 24V)
PN 87800 (synthetic rope, 12V)

SPECIFICATIONS:

Winch model: M8000, M8000-s

Part numbers: 26502 (wire rope, 12V), 88502 (wire rope, 12V, CE, International sales only), 265032 (wire rope, 24V), 87800 (synthetic rope, 12V)

Rated line pull: 8,000 lbs., (3630 kgs) single-line

Motor: Series wound, 12V 4.8 hp, 24V 2.1 hp,

Electrical controls: Solenoid

Remote control: Remote switch, 12' (3.7m) lead

Geartrain: 3-Stage Planetary

Gear ratio: 216:1

Clutch (freespooling): Sliding ring gear

Brake: Automatic direct drive cone

Drum diameter/Length: 2.5"/9.0" (6.4cm/23cm)

Weight: 26502, 88502, 265032: 74 lbs. (34 kgs)
87800: 55 lbs. (25 kgs)

Rope: Steel -- 100', 5/16" diam. (30m, 8mm diam.)
Spydura™ synthetic -- 100', 3/8" diam. (30m, 9.5mm diam.)

Fairlead: Roller

Recommended battery: 650 CCA minimum for winching

Battery leads: 2 gauge, 72" (1.83m)

Finish: Argent gray powder coat

12V DC performance specs (first layer of drum)


Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	42 (12.8)	80 amps	1/8000 (3629)
2000 (910)	16 (4.88)	200 amps	2/7280 (3302)
4000 (1810)	11.9 (3.63)	285 amps	3/6670 (3026)
6000 (2720)	9.79 (2.98)	350 amps	4/6230 (2826)
8000 (3630)	8.01 (2.44)	435 amps	

24V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	27.3 (8.32)	46 amps	1/8000 (3629)
2000 (910)	17.1 (5.21)	99 amps	2/7460 (3384)
4000 (1810)	12.6 (3.84)	145 amps	3/3980 (3166)
6000 (2720)	10.3 (3.14)	190 amps	4/6620 (3003)
8000 (3630)	8.8 (2.68)	235 amps	

Winch Dimensions:
21.04" L. x 6.3" D. x 7.6" H.
(534mm L. x 160m D. x 193mm H.)

Mounting Bolt Pattern:
10.0" x 4.5" (254mm x 114.3mm)

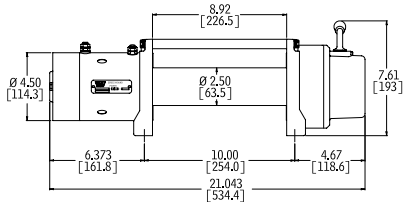

PORTABLE OPTION:
The M6000-SDP is a portable,
short drum configuration



PREMIUM
WINCH SERIES

WARN M6000 The perfect winch for light sport utility vehicles

Medium-to-light-duty winch with big ideas. A compact 6,000 lb. winch with a fast line speed of 10 ft. per minute full-load pull rate. 4.8 hp series-wound motor delivers big torque and power.

- Premium Series winch that delivers classic design, proven performance, and legendary WARN reliability
- Low-profile design will fit most trucks and SUVs
- Separate control pack for various mounting options
- Exclusive brake design provides superior control while winching

- Durable 3-stage planetary geartrain for smooth, reliable, operation
- Series-wound, high-speed motor provides fast line speed and strong pulls
- Remote control with 12" (3.7m) lead
- 80' of 5/16" (24m of 8mm) diameter wire rope

PN 45880 (12V)
PN 465052 (24V)
PN 39116 (Short Drum Portable)

SPECIFICATIONS:

Winch model: M6000, M6000-SDP

Part numbers: 45880 (12V), 465052 (24V), 39116 (Short Drum Portable)

Rated line pull: 6000 lbs. (2720 kgs) single-line

Motor: Series Wound, 12V 4.8 hp, 24V 2.1 hp

Electrical controls: Contactor

Remote Control: Remote switch, 12' (3.7m) lead

Geartrain: 3-Stage planetary

Gear ratio: 156:1

Clutch (freespooling): Sliding ring gear

Brake: Automatic direct drive cone

Drum diameter/Length: 2.5"/9.0" (6.4cm/23cm)

Weight: 74 lbs. (34 kgs)
Short drum: 72 lbs. (31 kgs)

Wire rope: 80', 5/16" (24m, 8mm)
Short drum: 50', 5/16" (15m, 8mm)

Fairlead: Roller
Short drum: Hawse

Recommended battery: 650 CCA minimum for winching

Battery leads: 2 gauge, 72" (1.83m)

Finish: Argent gray powder coat

12V DC performance specs (first layer of drum)


Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	48.5 (14.8)	85 amps	1/6000 (2722)
2000 (910)	23.7 (7.22)	175 amps	2/5460 (2477)
4000 (1810)	12.9 (3.93)	360 amps	3/5000 (2268)
6000 (2720)	10.0 (3.05)	465 amps	4/4670 (2118)

24V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	37.1 (11.31)	46 amps	1/6000 (2722)
2000 (910)	20.3 (6.19)	121 amps	2/5460 (2477)
4000 (1810)	14.4 (4.39)	185 amps	3/5000 (2268)
6000 (2720)	11.2 (3.41)	249 amps	4/4670 (2118)

Winch Dimensions:
21.04" L. x 6.3" D. x 7.6" H.
(534mm L. x 160mm D. x 193mm H.)

Mounting Bolt Pattern:
10.0" x 4.5" (254mm x 114.3mm)

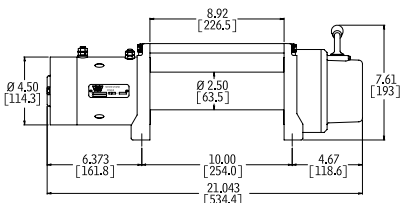



CASCADE MOUNTAIN FOOTHILLS. Uh, ok, this was a challenge. Mud in front. Mud in back. Mud that gets in places you don't want to hear about. Short work for a WARN VR10000 though.



WARN VR12000 Big power, big torque, not-so-big price


- If you've got a big, heavy truck and want to save some cash in the winch department, the WARN VR12000 is the perfect winch. With a stout 12,000 lb. pulling capacity and plenty of performance, this winch is big on power and big on value.
- Legendary WARN reliability and performance; 12,000 lb. (5440 kg) capacity
 - Low-profile design will fit most trucks and SUVs
 - Separate control pack for various mounting options
 - Exclusive brake design for superior winching control
 - Durable, smooth, and reliable three-stage planetary geartrain
- Series-wound motor for power and fast line speed
 - Remote control with 12' (3.7m) lead
 - 94' of 3/8" (28.6m of 9.5mm) diameter wire rope
 - Backed by the full WARN Limited Lifetime Warranty

PN 86260

SPECIFICATIONS:

- Winch model:** VR12000
- Part numbers:** PN 86260 (12V)
- Rated line pull:** 12,000 lbs., (5443 kg) single-line
- Motor:** 12V DC series wound
- Electrical controls:** Solenoid
- Remote Control:** Remote switch, 12' (3.7m) lead
- Geartrain:** 3-Stage planetary
- Gear ratio:** 216:1
- Clutch (freespooling):** Sliding ring gear
- Brake:** Automatic direct drive cone
- Drum diameter/Length:** 2.5"/9.0" (6.4cm/23cm)
- Weight:** 89 lbs. (40.4 kg)
- Wire rope:** 94', 3/8" diameter (28.6m, 9.5mm diam.)
- Fairlead:** Roller
- Recommended battery:** 650 CCA minimum for winching
- Battery leads:** 2 gauge, 72" (1.83m)
- Finish:** Powder coat over primer undercoating

12V DC performance specs (first layer of drum)			
Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	28.4 (8.6)	65 amps	1/12,000 (5443)
2000 (910)	12.6 (3.8)	144 amps	2/11120 (5044)
4000 (1810)	9.5 (2.8)	215 amps	3/10340 (4690)
6000 (2720)	7.5 (2.2)	281 amps	4/9770 (4432)
8000 (3630)	5.8 (1.7)	349 amps	5/9250 (4196)
10000 (4540)	4.4 (1.3)	415 amps	
12000 (5440)	3.6 (1.0)	457 amps	

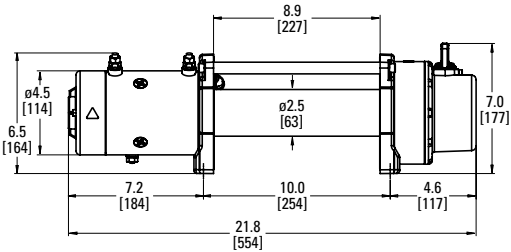

Winch dimensions:
21.83" L. x 6.3" D. x 6.97" H.
(554mm L. x 160mm D. x 177mm H.)

Mounting bolt pattern:
10.0" x 4.5" (254mm x 114.3mm)





The VR10000-s winch features Spydura™ rope, a ballistic nylon sliding sleeve that provides extra rope protection against abrasion and wear, and a polished aluminum hawse fairlead

WARN VR10000 Big on power and big on value

For those looking for more pulling power without having to break the bank, there's the WARN VR10000. With a 10,000 lb. capacity, this winch is ideal for heavier trucks, SUVs, and Jeeps. Big power, big torque, not-so-big price.

- Available in two versions: wire rope with roller fairlead, or WARN Spydura™ synthetic rope with polished aluminum hawse fairlead
- Legendary WARN reliability and performance; 10,000 lb. (4536 kg) capacity
- Low-profile design will fit most trucks and SUVs
- Separate control pack for various mounting options
- Exclusive brake design for superior winching control
- Durable, smooth, and reliable three-stage planetary geartrain
- Series-wound motor for plenty of power and fast line speed
- Remote control with 12' (3.7m) lead
- 94' (28.6m) of wire rope, or 100' (30m) of synthetic rope
- Backed by the full WARN Limited Lifetime Warranty

PN 86255
(VR10000, with wire rope and roller fairlead)

PN 87840 (VR10000-s, with synthetic rope and aluminum hawse fairlead)

SPECIFICATIONS:

Winch model: VR10000, VR10000-s

Part numbers: PN 86255 (steel rope), PN 87840 (synthetic rope)

Rated line pull: 10,000 lbs., (4536 kgs.) single-line

Motor: 12V DC, Series Wound

Electrical controls: Solenoid

Remote Control: Remote switch, 12' (3.7m) lead

Geartrain: 3-Stage Planetary

Gear ratio: 261:1

Clutch (freespooling): Sliding Ring Gear

Brake: Automatic Direct Drive Cone

Drum diameter/Length: 2.5"/9.0" (6.4cm/23cm)

Weight: PN 86255 – 89 lbs. (40.4 kg), PN 87840 – 64 lbs. (29.02 kgs)

Rope: Wire – 94', 3/8" diameter (28.6m, 9.5mm diam.)
Synthetic – 100', 3/8" diameter (30m, 9.5mm diam.)

Fairlead: PN 86255 – Roller, PN 87840 – polished aluminum hawse


Recommended Battery: 650 CCA minimum for winching

Battery leads: 2 gauge, 72" (1.83m)

Finish: High-gloss powder coat over primer undercoating

12V DC performance specs (first layer of drum)

Line Pull Lbs. (Kg)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (Kg)
0	25.9 (7.8)	66 amps	1/10000 (4536)
2000 (910)	13.0 (3.9)	160 amps	2/8000 (3629)
4000 (1810)	9.6 (2.9)	247 amps	3/7280 (3302)
6000 (2720)	7.1 (2.1)	332 amps	4/6670 (3026)
8000 (3630)	5.0 (1.5)	417 amps	5/6230 (2826)
10000 (4536)	2.3 (0.7)	502 amps	

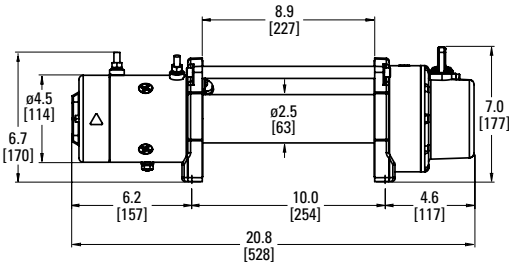

Winch dimensions:

20.8" L x 6.3" D x 6.97" H.
(528mm L x 160mm D x 177mm H.)

Mounting bolt pattern:

10.0" x 4.5" (254mm x 114.3mm)



The VR8000-s winch features Spydura™ rope. Includes a ballistic nylon sliding sleeve that provides extra rope protection against abrasion and wear, and a polished aluminum hawse fairlead

WARN VR8000 Great for lighter trucks, Jeeps and SUVs

A full 8,000 lb. pulling capacity makes this winch great for lighter trucks, Jeeps, and SUVs. Quick line speed, durable construction, and WARN dependability ensure this winch will come through time and time again.

- Now available in two versions: wire rope with roller fairlead, or WARN Spydura™ synthetic rope with polished aluminum hawse fairlead
- Legendary WARN reliability and performance; 8,000 lb. (3630 kg) capacity
- Low-profile design will fit most trucks and SUVs
- Separate control pack for various mounting options
- Exclusive brake design for superior winching control
- Durable, smooth, and reliable three-stage planetary geartrain
- Series-wound motor for plenty of power and fast line speed
- Remote control with 12' (3.7m) lead
- 94' (28.6m) of wire rope, or 100' (30m) of synthetic rope
- Backed by the full WARN Limited Lifetime Warranty

PN 86245 (VR8000, with wire rope and roller fairlead)

PN 87835 (VR8000-s, with synthetic rope and aluminum hawse fairlead)

SPECIFICATIONS:

Winch model: VR8000, VR8000-s

Part numbers: PN 86245 (steel rope), PN 87835 (synthetic rope)

Rated line pull: 8,000 lbs., (3629 kg) single-line

Motor: 12V DC Series Wound

Electrical controls: Solenoid

Remote control: Remote switch, 12' (3.7m) lead

Geartrain: 3-Stage Planetary

Gear ratio: 216:1

Clutch (freespooling): Sliding Ring Gear

Brake: Automatic Direct Drive Cone

Drum diameter/Length: 2.5"/9.0" (6.4cm/23cm)

Weight: PN 86245 – 80 lbs. (36.3 kgs), PN 87835 – 62 lbs. (28.12 kgs)

Rope: Wire – 94', 5/16" diameter (28.6m, 8mm diam.)
Spydura™ synthetic – 100', 3/8" diameter (30m, 9.5mm diam.)

Fairlead: PN 86245 – Roller, PN 87835 – polished aluminum hawse


Recommended Battery: 650 CCA minimum for winching

Battery leads: 2 gauge, 72" (1.83m)

Finish: Powder coat over primer undercoating

12V DC performance specs (first layer of drum)

Line Pull Lbs. (Kg)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (Kg)
0	29 (8.8)	69.2 amps	1/8000 (3629)
2000 (910)	14.2 (4.3)	179.2 amps	2/7280 (3302)
4000 (1810)	9.9 (3)	281 amps	3/6670 (3026)
6000 (2720)	7.3 (2.2)	381 amps	4/6230 (2826)
8000 (3630)	4.8 (1.4)	457 amps	

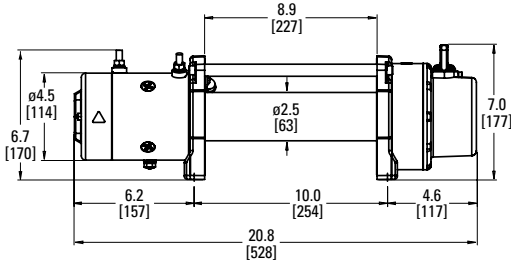

Winch dimensions:

20.8" L x 6.3" D x 6.97" H.
(528mm L x 160mm D x 177mm H.)

Mounting bolt pattern:

10.0" x 4.5" (254mm x 114.3mm)

MOJAVE DESERT. The WARN crew showed up to help out all over the place at the King of the Hammers event. We live for this stuff.



MOUNTING SYSTEMS/BUMPERS/BODY ARMOR: MOUNT UP, TAKE OFF WITH CONFIDENCE.

Warn Industries means more than just winches. We manufacture a full line of mounting systems and specialty bumpers engineered specifically to withstand the particular stresses encountered in winching operations.

The WARN line also includes products that wrap your vehicle in rugged protection. Heavy gauge, steel body armor and accessories in the form of rock sliders, bumpers, and skid plates all follow Warn Industries' legacy of durability and functionality.

WARN GEN II TRANS4MER® MOUNTING SYSTEM

The WARN Gen II Trans4mer winch tray attaches directly to your vehicle's frame, making it easier than ever to mount a winch to a vehicle. Now, whether you simply need a strong, durable place to mount your WARN winch, or you want the top-of-the line system with headlamp guards, grille guard, light bar, and front receiver, the WARN Gen II Trans4mer system is more accessible, durable, and versatile than ever before.



Gen II Trans4mer system, complete with all options.



Gen II Trans4mer Mounting Kit, with 16.5ti winch (Mounting Kit includes winch tray and mounting brackets).



GEN II TRANS4MER COMPONENTS (sold separately):

① Mounting Kit

- Required part
- Allows you to mount a WARN winch
- Includes mounting brackets
- Available for mid-frame or large-frame winches
- Includes tow hooks
- Black or stainless steel finish

② Grille Guard Kit

- Gives you extra protection to your vehicle's grille area
- Allows you to mount other optional parts
- Vehicle-specific application
- Available in black or stainless steel finish
- Choose from short* or tall version
- Optional part to kit

③ Light Bar Kit

- Lets you use up to four WARN lights with a WARN winch
- Attaches to the Grille Guard; has two different mounting positions
- Available in black or stainless steel finish
- Optional part (lights not included)

④ Headlamp Guard Kit

- Protects the area around your vehicle's headlamps
- Vehicle-specific application
- Attaches to Grille Guard
- Available in black or stainless steel finish
- Optional part to kit

⑤ Receiver Bracket Kit

- 2" receiver for the front of a vehicle.
- For use with WARN Multi-Mount system or receiver shackle
- Universal fit
- Black finish only
- Optional part to kit

* Light Bar and Headlamp Guards not compatible with short Grille Guard Kit

See the WARN application guide for part numbers and application listings
See warn.com for 2012 vehicle apps.

WARN CUSTOMER SERVICE: (800) 543-9276





2009 Ford F-150 equipped with stainless steel Gen II Trans4mer Mounting Kit, Grille Guard Tube (tall version), Headlamp Guards, and Light Bar



2011 Chevy Silverado 2500 equipped with WARN Gen II Trans4mer Mounting Kit and Grille Guard Tube (short version)



2011 Ram HD equipped with WARN Gen II Trans4mer Mounting Kit (stainless)



2011 Ford Super Duty equipped with WARN Gen II Trans4mer Mounting Kit, Grille Guard Tube (tall version), Headlamp Guards, and Light Bar



2011 Ford Super Duty equipped with WARN Gen II Trans4mer Mounting Kit, Grille Guard Tube (tall version), Headlamp Guards, and Light Bar




2010 Dodge HD equipped with WARN Gen II Trans4mer Mounting Kit, Grille Guard Tube (tall version), Headlamp Guards, and Light Bar



WARN TRANS4MER® MOUNTING SYSTEM

The original WARN Trans4mer can be configured in several ways to match your needs. This system is engineered so the Grille Guard uprights bolt directly to the vehicle's frame, and the Winch Carrier then bolts to the Grille Guard uprights. All components are sold separately, so you can configure the system to meet your needs.

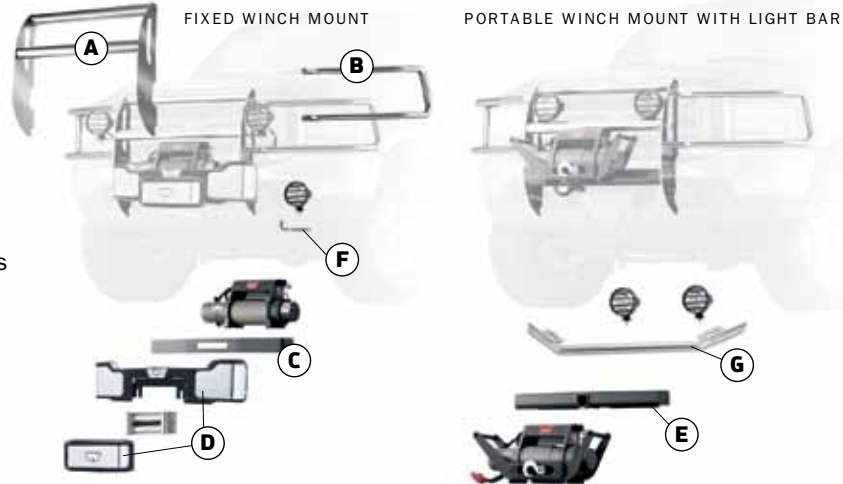

TRANS4MER COMPONENTS (sold separately):

- A Grille Guard**

The foundation of the Trans4mer system. The Grille Guard comes with two uprights and two crossbars, and bolts directly to the vehicle's frame. It is a required component because it provides the base for all other options.
- B Brush Guards**

Add style and protection with brush guards that compliment your vehicle's lines.
- C Winch Carrier**

For a fixed winch mount, you'll need to add the Winch Carrier. Made of black powder-coated steel. Bolts to grille guard.
- D SST Carrier Cover**

Bolts over the carrier to give a smooth, contoured, and integrated look to the Trans4mer. Includes fairlead cover.
- E Front Receiver Bar**

For a portable winch mount, choose the 2" front receiver. Designed to hold the Multi-Mount winch. Bolts to Grille Guard.
- F Light Mounting Brackets**

"L" shaped brackets are designed to mount lights from the sides of the Grille Guard.
- G Light Mounting Bar**

Light bar with two mounting tabs can be easily added to the Trans4mer system. Bolts to Grille Guard
- Choice Of Finish:**
Polished Stainless Or Black Powder Coat

See the WARN application guide for part numbers and application listings



Ford Super Duty equipped with Stainless Steel Trans4mer Grille Guard, Brush Guards, Winch Carrier, M15000 Winch, SST Carrier Cover.



Ford F-150 equipped with Stainless Steel Trans4mer Grille Guard, Brush Guards, Winch Carrier, PowerPlant winch, SST Carrier Cover, Angled Light Bar.



GMC Sierra HD equipped with Stainless Steel Trans4mer Grille Guard, Brush Guards, Winch Carrier, M15000 Winch, and SST Carrier Cover.



Dodge Ram HD equipped with Stainless Steel Trans4mer Grille Guard, Brush Guards, Winch Carrier, M15000 Winch, SST Carrier Cover.



Chevrolet Suburban equipped with black powder-coat finish Trans4mer Grille Guard, Brush Guards, Winch Carrier, and 9.5cti Winch.



Toyota Tundra equipped with Stainless Steel Trans4mer Grille Guard, Brush Guards, Winch Carrier, PowerPlant Winch, SST Carrier Cover.

MULTI-MOUNT WINCH MOUNTING SYSTEM

For those looking for added versatility with their winch, the WARN Multi-Mount system allows you to have a winch on the front or rear of the vehicle for maximum flexibility. Simply add the receiver to the front of the vehicle, and the Quick Connect wiring to the rear, and you're ready to go.



WARN FRONT RECEIVER

One of the simplest ways to mount your portable winch is with the WARN 2" front receiver. Installation is easy. The receiver mounts directly on most vehicle frames without drilling.

For part numbers, see app guide or go to www.warn.com

QUICK CONNECT POWER ACCESSORIES


A). Dust Cover (for Quick Connect plug) **PN 69847**

B). Quick Connector and 28"/71cm power lead. Connects to winch **PN 36080**

C). Quick Connect plugs only, no power lead **PN 22680**

D). Quick Connector and 7.5'/2.2m power lead, for front mounting of portable winch **PN 26405**

E). Quick Connect booster cable kit **PN 26769**

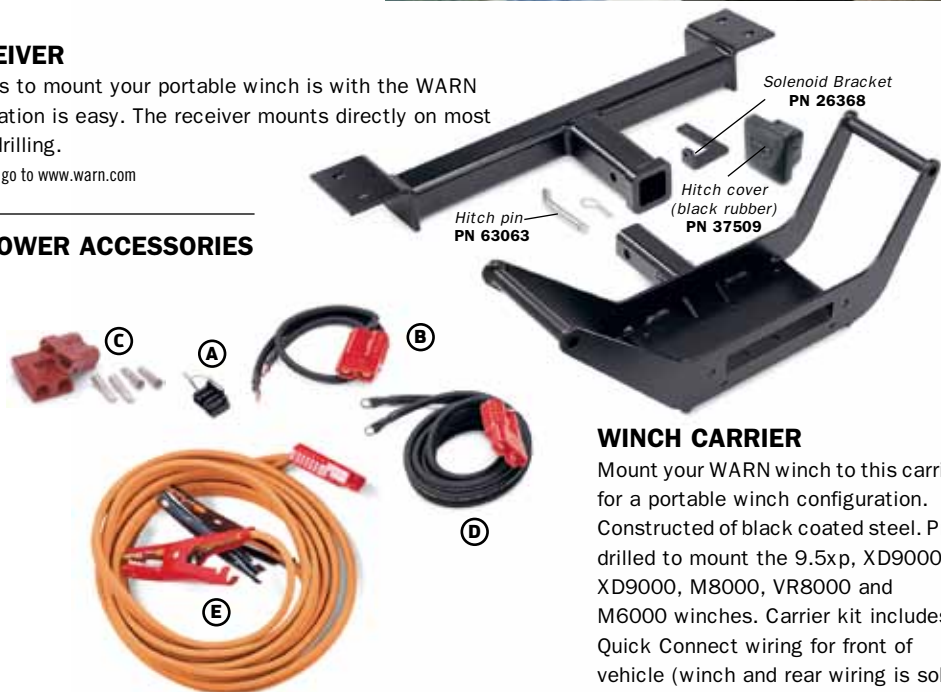

QUICK CONNECTOR WIRING KITS FOR REAR OF VEHICLE

20'/6m connection for rear of vehicle. Includes Power Interrupt kit and dust cover **PN 32963**

24'/8m connection for rear of vehicle. Includes Power Interrupt kit and dust cover **PN 32966**



WINCH CARRIER

Mount your WARN winch to this carrier for a portable winch configuration. Constructed of black coated steel. Pre-drilled to mount the 9.5xp, XD9000i, XD9000, M8000, VR8000 and M6000 winches. Carrier kit includes Quick Connect wiring for front of vehicle (winch and rear wiring is sold separately).

PN 26370 Winch carrier and wiring for front of vehicle. Winch sold separately. Note: to mount the 9.5ti/cti you must purchase as a complete kit.

PN 75330 Multi-Mount Winch Carrier for PowerPlant HP. PowerPlant sold separately. Includes wiring for front of vehicle.

PORTABLE WINCH KITS Complete packages include winch, carrier and wiring for front of vehicle.



9.5cti MULTI-MOUNT KIT

This kit includes the winch, remote, carrier, 7.5' power lead with Quick Connect plug for front of vehicle and hawse fairlead.

PN 85760 9.5cti Multi-Mount Kit
PN 85757 9.5cti Multi-Mount for the H2 Hummer

XD9000i MULTI-MOUNT KIT

Includes winch, remote, carrier, 7.5' power lead with Quick Connect plug for front of vehicle and hawse fairlead.

PN 37441 XD9000i Multi-Mount Kit

M6000 SDP

Winch comes complete with handle/mounting system, hawse fairlead, and power lead with Quick Connect plug for the front of the vehicle.

PN 39116 M6000 SDP Short Drum Portable



PIKE CREEK, ALVORD DESERT. We've got two words for those who want to live the camping life off-road: Do it. With able assists from a WARN Trans4mer mounting system, 9.5cti winch, and SDB-210 lights.



HIDDEN KIT WINCH MOUNTING SYSTEM

Some vehicle owners want the functionality of a winch, but without the winch visible on the front of the vehicle. For these folks, WARN offers the Hidden Kit Mounting System. With this kit, you can mount a WARN winch using factory frame holes while retaining the factory bumper. Available for select Chevrolet, GMC, Dodge, and Ford full-size trucks.



'99-'12 FORD SUPER DUTY The WARN Hidden Kit for the Ford Super Duty will accommodate large-frame WARN winches (including the 16.5ti) behind the original bumper. Once installed, the bumper extends out only 6" more than stock, and any gaps can be filled in with the Skirting Kit (sold separately). The factory tow hooks remain intact and functional. Access to the winch controls is from the top.



'02-'05 DODGE 1500 PICKUP The kit for the Ram 1500 mounts the winch completely behind the existing factory bumper, and will accommodate any WARN low-profile winch up to the 9.5xp. Access to controls is cleanly hidden behind the front grille.



'97-'03 FORD 4X4 F-150, F-250 AND EXPEDITION The winch mounts inside the factory bumper, and access to controls is gained through the large air intake. The wire rope is fed through a roller fairlead mounted beneath the bumper.



CHEVY AND GMC 1/2 TON PICKUPS AND SPORT UTILITIES

This kit will handle your WARN winch, including the 9.5xp. While the winch is hidden and protected from the elements, the remote control extension (included with kit) allows you to plug the remote into your choice of several convenient locations.



HEAVY DUTY CHEVROLET AND GMC TRUCKS

This hidden kit comes with a special XD9000 short-drum winch that fits the unique requirements of this mounting system. The kit bolts directly to the truck frame so the only visible feature is the bumper and the integrated roller fairlead.



'04-'05 FORD F-150

This kit includes a special 9,000-lb. short-drum winch that fits precisely behind the factory bumper. An all-steel WARN carrier plate supports a space-efficient hawse fairlead bracket in the front and the winch on the reverse side while still providing easy clutch lever access.

SANTIAM SIDE OF MUD FEST: WARN SDB-210 lights cut through the mud. WARN winches cut through the mud. WARN HD Bumpers cut through the mud. Guess mud's no obstacle for WARN gear.



WARN HD BUMPERS FOR CHEVY, DODGE, AND FORD TRUCKS

When you want the ultimate front bumper for your truck, you want the WARN Heavy Duty Bumper. These units are contoured to the shape of the vehicle's grille and body and have that custom-made look. They offer excellent protection thanks to a one-piece welded design that incorporates round light ports and a concealed winch mount. The WARN Heavy Duty Bumper is for the larger capacity WARN winches, including the 16.5ti.



NEW



2011 Chevy Silverado HD 2500/3500

WARN HD BUMPERS FOR THE NEWEST FULL SIZE FORD, CHEVY AND DODGE TRUCKS. KEY FEATURES INCLUDE:

- Welded, one-piece construction uses heavy 1/4" and 3/16" thick steel
- Integrated winch mounting structure provides maximum strength. Rated for use with all WARN Heavyweight Series winches, including the 16.5ti
- Bumpers available with or without tubular grille/brush guard
- Brush guards constructed of large diameter, welded steel tubing
- Welded eyelets for D-shackles (shackles sold separately)
- Bumper design provides generous tire clearance and accommodates oversize tires
- Bumper features integrated light ports, and includes a set of two WARN W350F Fog Lights with wireless remote. Additional light mounting holes on top of the bumper
- Black powder coat finish with undercoat delivers maximum durability. Light texture finish blends perfectly with factory plastic accents
- Commercial duty rated and fleet approved

NEW



2010-11 Dodge Ram HD 2500/3500 and 2011 Dodge Ram 4500/5500

NEW



2011 Ford Super Duty F-250, F-350, F-450, F-550





Warn HD Bumper With Grille/Brush Guard for Ford Super Duty Models '99-10



Warn HD Bumper With Grille/Brush Guard for Chevy Silverado HD Models '03-10



Warn HD Bumper (without tubes) for Ford Super Duty Models '99-10

WARN HD BUMPERS FOR OLDER FULL SIZE FORD, CHEVY AND DODGE TRUCKS. KEY FEATURES INCLUDE:

- Bumpers available with or without tubular grille/brush guard
- All steel construction and textured black powder-coated finish
- Additional light mounting holes on top of the bumper
- Reuses factory tow hooks or comes with welded eyelets for D-shackles depending on application (shackles sold separately)
- Accommodates diesel applications and oversize tires
- Commercial duty rated and fleet approved
- Rated for use with all WARN large-frame winches including the 16.5ti
- Bumpers with integrated tubular grille/brush guard includes WARN W350F Fog Lights
- Bumpers without grille/brush guard, lights sold separately



Warn HD Bumper With Grille/Brush Guard for Dodge Models '02-09

ROCK CRAWLER FRONT BUMPER FOR JEEP WRANGLER JK, TJ, YJ, AND CJ

These bumpers have tapered ends for increased approach angles, welded eyelets to mount D-shackles, and pre-drilled holes to mount lights. Available for Jeep CJs, YJs, TJs, and JKs, these WARN bumpers are laser-cut from 3/16" steel, then CNC formed and robotically welded for precise fit. The bumpers wear a black powder-coated finish for durability and good looks.



JK WRANGLER
Shown equipped with front Rock Crawler Bumper, shackles, grille guard tube, front skid plate for factory blocker beam, winch mounting plate and PowerPlant Dual Force HP winch, 5" flood lights and SDB-160 spot/flood lights.



TJ WRANGLER
Shown equipped with front Rock Crawler Bumper, shackles, winch mounting plate, PowerPlant Dual Force HP winch and SDB-160 spot/flood lights. Grille guard is not pictured, but is available.

YJ WRANGLER
Shown equipped with front Rock Crawler Bumper, shackles, grille guard tube, winch mounting plate, XD9000i, and SDB-160 spot/flood lights.

'76-'86 CJ SCRAMBLER
Front Rock Crawler Bumper.





ROCK CRAWLER STUBBY BUMPER FOR JEEP WRANGLER JK AND TJ

NEW

For those looking to equip their vehicle for serious rock crawling, WARN now offers a narrower version of the popular Rock Crawler Bumper. Laser-cut and CNC-formed for durability, these bumpers have eyelets for D-shackles and recessed mounting hardware for a clean finish and reduced fastener corrosion. All bumpers includes a winch mount that accepts all WARN mid-frame winches 12,000 lbs. capacity and under (excluding M8274-50 winch*).

The bumper for the Jeep JK also features recessed jack points for increased recovery options. There are also recessed ports and mounts for auxiliary lights – including factory lights. An available version with a welded-on CNC-formed grille tube provides increased front-end protection (JK only).

* Winch mounting plate PN 87675 required for mounting M8274-50 to JK Stubby Bumper without grille guard tube. M8274-50 winch is not compatible with TJ Stubby Bumper and JK Stubby Bumper with grille guard tube.



WARN Rock Crawler Stubby Bumper for the Jeep JK, without grille guard tube



WARN Rock Crawler Stubby Bumper for the Jeep JK, with welded-on grille guard tube

WARN Rock Crawler Stubby Bumper for the Jeep TJ



WARN ELITE SERIES™ FRONT BUMPER FOR THE JEEP WRANGLER JK

Whether you're planning an overland expedition or just out exploring, these bumpers are designed for life off road. Features include a low, recessed winch mount for the ultimate winch protection, and a wrap-around design that offers strength and style. There are recessed ports and mounts for auxiliary lights, and a welded-on CNC-formed grille tube for increased protection

(optional). There are recessed jack points for increased recovery options, and eyelets for D-shackles. Mounting fasteners are hidden inside the bumper for a clean finish and reduced corrosion. This is the ultimate bumper for those who are looking for versatility, capability, and protection.



WARN Elite Series Front Bumper, with welded-on grille guard tube

FEATURES

- Recessed winch mount accepts all WARN mid-frame winches 12,000 lbs. capacity and under (excluding M8274-50)
- Recessed light ports and mounts for auxiliary lights (lights sold separately)
- Laser cut and CNC-formed steel construction
- Available with and without welded-on, CNC-formed grille tube
- Recessed jack points for more stable jack positioning
- Sand blasted prior to powder-coat for increased coating durability
- Mounting fasteners hidden inside for clean finish and reduced fastener corrosion



WARN Elite Series Front Bumper, without grille guard tube

ROCK CRAWLER REAR BUMPER FOR JEEP WRANGLER JK, TJ, YJ, AND CJ

This tough, durable bumper gives maximum off-road performance, thanks to its tapered ends for increased approach angles. For increased recovery options on Jeep TJ, YJ, and CJ, there's an integrated 2" receiver hitch to mount your portable winch or shackle bracket (not rated for towing). The JK Rear Rock Crawler Bumper features welded eyelets for D-shackles and a cutout for the factory receiver hitch.



TIRE CARRIER The WARN Tire Carrier for the Rear Rock Crawler Bumper is designed to carry a heavier wheel and tire, up to 37" in diameter. The carrier pivots on a robust 1-1/2" solid steel shaft pin that comes up through the bumper into the frame carrier. The shaft itself is welded – not bolted. Structural T-joint welds (vs. corner welds) will make this unit stand the test of time. A polyurethane pad reduces rattling. Includes frame reinforcing brackets.

MIDDLE OF MUD FEST. If this driver could see, he might be a little worried. Then again, the fun is burying this Suzuki-based buggy in the deep stuff and letting WARN winch you out.





SAND LAKE OHV AREA, OR. More and more Jeep Wrangler YJs are showing up with the WARN VR8000 winch. Hauling out of deep sand might look easy; it's anything but.



WINCH MOUNTING PLATES FOR JEEP WRANGLER VEHICLES

Off-roaders have two options for mounting a WARN winch on their Jeep JK, TJ, YJ, or CJ. The first option is a plate that mounts the PowerPlant Dual Force, 9.5cti and most other WARN winches to the WARN Rock Crawler bumper, standard factory bumper, or optional factory tube bumper.

The second option is a mounting plate that marries the WARN M8274-50 to the WARN Rock Crawler or factory bumper. An optional grille guard tube is available for this kit, too.

GRILLE GUARD TUBE FOR JEEP TJ STOCK BUMPER

Black, powder-coated steel tube for the Jeep Wrangler TJ factory bumper. Accommodates all current WARN winches (except M8274-50).



Note: WARN winch plate is required



Winch mounting plate kit for **JEEP JK WRANGLER**
For mounting M8274-50 Winch



Winch mounting plate for **JEEP TJ WRANGLER**
For mounting M8274-50 Winch



Winch mounting plate for **JEEP CJ WRANGLER**
For all current WARN mid-frame winches, except M8274-50



Winch mounting plate for **JEEP YJ WRANGLER**
For all current WARN mid-frame winches, except M8274-50

Note: not all available kits are pictured above. See the WARN app guide for part numbers and more information. Or go to www.warn.com

UNIVERSAL FLATBED WINCH MOUNTING PLATES

FOOT DOWN WINCH MOUNT

Kit includes winch mounting plate, solenoid mounting bracket and nuts and bolts kit. Pre-drilled to mount the PowerPlant, Endurance 12.0, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, and M6 winches

PN 13942 Foot down winch mount kit **PN 60368** Plate only

FOOT FORWARD WINCH MOUNT

Kit includes winch mounting plate with nuts and bolts kit. Pre-drilled to mount the M12, 9.5xp, XD9, M8274-50, M8, VR8, and M6 winches. (Not pictured).

PN 11078 Foot forward winch mount kit (not pictured)

FOOT DOWN WINCH MOUNT FOR TRAILERS

Designed to be mounted to a trailer. The ends of the mounting plate are cut at an angle to accommodate the shape of a trailer tongue (other plates are square on the ends). Pre-drilled to mount the 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6, and the WARN 1700 and 4700 winches. Kit includes mounting plate and filler plate (filler plate is designed to mount WARN utility winch fairlead).

PN 63885 Foot down winch mount kit **PN 68782** Filler plate only



**WARN ROCK CRAWLER BUMPERS
FOR THE TOYOTA PICKUP AND JEEP XJ CHEROKEE**



FRONT

This bumper replaces the factory front bumper for increased off-road performance, durability, and style. These units showcase sloped vertical surfaces, which are tapered and welded. This is to maintain approach angles and not act like a plow in deep mud or snow. The bumper's sides continue around to match up with the vehicle's flares and style lines. Welded eyelets are ready for D-shackles and the winch mounting system is integrated and pull-tested for mid-frame winches up to 12,000 lbs. Made from 3/16" and 1/4" steel, and covered in a black powder-coated finish. (Not rated for tow-bar use).

REAR

The WARN Rock Crawler Rear Bumper for the Jeep XJ Cherokee and Toyota Pickup is designed with off-road performance in mind. The bumper sits high and tight, and is sloped to maintain approach angles and ground clearance. Welded eyelets will mount D-shackles, creating anchor points to increase your vehicle's recovery options.

Both bumpers are built from 3/16" and 1/4" laser-cut steel, which is CNC formed, and robotically welded for excellent fit and durability. These units come finished in a black powder coating, and are compatible with factory and aftermarket rear receivers.

TIRE CARRIER FOR THE CHEROKEE XJ

The Cherokee bumper is available in a version that's designed to accept the WARN Tire Carrier. Built to carry heavier tires (up to 37"), this robust carrier has all the heavy duty features needed to make it hold up over the long run.



OFF-ROAD BUMPERS FOR THE TOYOTA FJ CRUISER

Warn Industries offers front and rear Off-Road Bumpers for the Toyota FJ Cruiser to allow greater off-road recovery options. The Front Bumper accepts all current WARN mid-frame winches up to 12,000 lbs., including the PowerPlant Dual Force, and features an integrated grille guard, light brackets, and fog lamp mounts.

The Rear Bumper fits around the factory receiver hitch and accommodates the factory back-up sensors if so equipped. It has welded eyelets for D-shackles, and there's a recessed area allowing up to a 33" tire to be transported on the factory tire carrier.

Both bumpers wear a black powder-coated wrinkle finish for good looks and outstanding durability.



BORNEO EQUATOR EXPEDITION: Ok, this is where hard-core gets its definition. It's 1,200 miles of jungle, and more jungle. Even the Camel Trophy pulled out of this one—true story.

WARN ROCK SLIDERS FOR THE JEEP WRANGLER JK, TJ, YJ, CJ, AND CHEROKEE XJ

Take on the toughest trails with WARN Rock Sliders. These rugged parts are designed to guard against damage from rocks and boulders, keeping your vehicle looking and performing at its best. Thick steel construction and black powder-coated finish ensure durability and good

looks. For the TJ, YJ, and CJ, the steel plate bolts right to the Jeep's body. For Wrangler JK and Cherokee XJ, tube-style sliders use support brackets to bolt to the frame/subframe. Mounting hardware is included. The JK sliders are covered in a black powder-coated wrinkle finish.

Tube style rock sliders **PN 74580** '07-11 JK, two door for the Wrangler JK **PN 74575** '07-11 JK, four door



Plate style rock sliders for the Wrangler TJ, YJ and CJ

PN 69875 '04-05 TJ Unlimited
PN 71500 '03-06 TJ
PN 63002 '97-02 TJ
PN 63003 '87-96 YJ
PN 63004 '76-86 CJ7



Tube style rock sliders for the Cherokee XJ

PN 67930 '84-01 XJ Cherokee

WARN BODY ARMOR FOR JEEP VEHICLES



WARN OIL PAN SKID PLATE FOR THE JEEP TJ WRANGLER

The unique design virtually eliminates rust-creating welds. The skid plate is a bolt-on design with a frame attachment bracket that allows drive shaft travel. It also means easy conversion from a stock to lifted vehicle. Made from 1/8" 11-gauge steel and black powder coated.

PN 65152 Jeep '97-03 TJ (4-cylinder)
PN 65020 Jeep '97-03 TJ (6-cylinder. Excludes Rubicon and Unlimited models)



WARN DIFFERENTIAL SKID PLATE

Angled for a tight fit and structural rigidity, the Differential Skid Plate fits both high and standard pinion covers to give full protective coverage. Since it is a closed system, it slides over objects and won't snag or hang up. Made from 3/16" steel. Available in black powder coat.

PN 65443 (Dana 30, black)
PN 65445 (Dana 35, black)
PN 65447 (Dana 44, black)
PN 65449 (Dana 60, black)
PN 65637 (Ford 8.8, black)



WARN STEERING BOX SKID PLATE FOR THE JEEP WRANGLER

The full enclosure design has a tight, 1/4" clearance between the skid plate and steering box to keep excellent clearance from the big rocks. It also means full structural rigidity when the rocks hit. Large holes allow for debris clearance without sacrificing structural support. Made from 3/16" steel and black powder coated.

PN 64650 Jeep YJ '87-96
PN 64250 Jeep TJ '97-06 (includes Rubicon)



WARN FUEL TANK SKID PLATE FOR THE JEEP WRANGLER

Put some thick, 3/16" steel between your fuel tank and the rough terrain your Jeep will conquer. The WARN Fuel Tank Skid Plate for the Jeep Wrangler not only adds extreme protection over the stock setup, it bolts directly onto the frame using the existing factory attachment points. On the Jeep Wrangler TJ model, the WARN Fuel Tank Skid Plate has a dropped center relief for proper fuel pump clearance and protection. Both skid plates feature drain holes to keep the plate free of debris. Durable black powder coat finish fights off rust.

PN 67820 Fuel tank skid plate for the Jeep TJ Wrangler
PN 66550 Fuel tank skid plate for the Jeep YJ Wrangler



WARN TRANSFER CASE SKID PLATE FOR THE JEEP XJ CHEROKEE

Save your innards with bolt-on ease. The WARN Transfer Case Skid Plate is designed to give you maximum protection for your costly transfer case components. Made from 1/8" and 3/8" steel. Black powder coat finish.

PN 68930 '84-01 Cherokee XJ (Fits vehicles equipped with NP231 transfer cases only)



SAND LAKE, PACIFIC COASTAL AREA.
You can call the WARN VR8000 an entry-level winch,
but the owner of this Cherokee calls it a rig saver.

**WINCH ACCESSORIES:
THE ACCESSORIES YOU NEED, THE VERSATILITY YOU WANT**

To Go Prepared means not only having the right winch and mounting system, but the accessories to go along with it. It could be a snatch block to help with angled pulls, or a tree protector to tread lightly. Whatever your need, combining your WARN winch with the correct accessory kit makes it an even more versatile and productive tool.



Medium-Duty Winching Accessory Kit

Designed for winch capacities to 9,500 lbs. (4310 kgs) with 5/16" (8mm) wire rope.

KIT INCLUDES:

- 19,000 lbs/8618 kgs maximum capacity snatch block, with grease port
- 2" x 8' (5cm x 2.4m) tree trunk protector. Rated to 14,400 lbs/6531 kgs
- 3/4" (20mm) clevis/D-shackle
- 10' of 5/16" (3m of 8mm) grade 7 choker chain
- Red or camouflage nylon soft case
- WARN gloves

PN 25300 Winching Accessory Kit with red bag

PN 37880 Winching Accessory Kit with camo bag

PN 26081 Nylon soft case (bag only)



Medium-Duty Winching Accessory Kit, Camo

Designed for winch capacities to 9,500 lbs. (4310 kgs) with 5/16" (8mm) wire rope.

KIT INCLUDES:

- 19,000 lbs/8618 kgs maximum capacity snatch block, with grease port
- 4" x 8' (10cm x 2.4m) tree trunk protector. Rated to 30,000 lbs breaking strength
- 3" x 30' (8cm x 9m) standard recovery strap. Rated to 21,600 lbs/9797 kgs.
- Two 3/4" (20mm) clevis/D-shackles
- Camo nylon soft case
- WARN gloves

PN 62858 Winching Accessory Kit with camo bag



Heavy-Duty Winching Accessory Kit

Designed for winch capacities to 12,000 lbs. (5440 kgs) with 3/8" (9.5mm) wire rope.

KIT INCLUDES:

- Heavy-duty snatch block. 24,000 lbs/10886 kgs maximum capacity
- Tree trunk protector, 4" x 8' (10cm x 2.4m) Rated to 30,000 lbs breaking strength
- 3/4" (20mm) clevis/D-shackle
- Standard recovery strap, 3" x 30' (8cm x 9m). Rated to 21,600 lbs/9797 kgs.
- Camouflage nylon soft case
- 10' of 5/16" (3m of 8mm) grade 7 choker chain
- WARN gloves

PN 29460 Heavy-Duty Winching Accessory Kit

PN 37881 Nylon soft case (bag only)



WARN Snatch Blocks

Used properly, the multi-purpose snatch block can double the pulling power of any winch, or change your pulling direction without damaging the wire rope. They also help to reduce heat build up and amp draw.

PN 15640 24,000 lbs/10886 kgs maximum capacity heavy-duty snatch block, with grease port. For winch capacities to 12,000 lbs. (5440 kgs) with 3/8" (9.5mm) wire rope.

PN 61560 19,000 lbs/8618 kgs maximum capacity snatch block, with grease port and overload indicator. For winch capacities to 9,500 (4310 kgs) with 5/16" (8mm) wire rope.

PN 63490 33,000 lbs maximum capacity heavy-duty snatch block, with grease port. For winch capacities to 16,500 lbs. (7484 kgs) with 7/16" (11mm) wire rope.

Wireless Control System

The WARN Wireless Control System lets you operate your truck’s winch remotely from up to 50’ away. The system will work with any WARN winch with a 5-wire electrical system.

The system is easy to install and a cinch to use. For easy installation, the Wireless Control System comes with a receiver with an internal antenna, and all of the necessary mounting hardware. The receiver is potted for extreme resistance to water and the elements. The weather-proof transmitter has two large buttons that make it easy to operate, even while wearing gloves, and its two-color LED provides operator feedback.

PN 76080 Wireless Control System for WARN Truck/SUV winches



Receiver Shackle Bracket

Combines a heavy-duty receiver bracket with a 3/4" (20mm) shackle. Utilizes a standard Class III receiver hitch as a recovery point for off-road use. Fits all standard Class III hitches (hitch pin not included).

PN 29312 Receiver Shackle Bracket
PN 63063 Hitch pin kit 5/8" (15.9mm) diameter hitch pin and clip. Fits 2" class III receiver.



Shackle FOR RIGGING ATTACHMENT

The clevis D-shackle provides a means for connecting the looped ends of cables, straps and snatch blocks. The shackle’s pin is threaded to allow easy removal.

PN 13047 For M6000 and larger winches. 3/4" (20mm) shackle with 7/8" pin diameter.
PN 28884 For 4000 lbs./1814 kgs capacity winches and under. 5/8" (15.9mm) pin diameter.



Winch Remote Control

Redesigned remote control stands up to rough treatment off-road. Rubberized, ergonomic pistol-grip handle. Ultra-weather/mud resistant thanks to improved sealing. Simple, intuitive operation. 12' (3.7m) lead. Compatible with previous generation of WARN Truck winches.

PN 83665 Standard remote
PN 83653 Remote for PowerPlant
PN 83669 Remote for Endurance 12.0
PN 83658 Remote for 9.5ti, 9.5cti, and 16.5ti

Roller Fairlead

Reduces wire rope wear, especially on pulls at severe angles. Zinc plated finish.

PN 5742 For winches over 4000 lbs/1814 kgs capacity (except M15000 and 16.5ti).
PN 69394 For M15000 and 16.5ti winches.

Hawse Fairleads

WARN offers two hawse fairleads: standard black and polished aluminum. The black unit is good for use with wire or synthetic rope on winches with a 4,000 lb. pull capacity or greater. The new polished-aluminum fairleads are designed to be used with synthetic rope only, and decrease the possibility of fraying.

PN 73850 Standard Hawse Fairlead
PN 87914 Polished Aluminum Hawse Fairlead (standard drum)
PN 73852 Polished Aluminum Hawse Fairlead (short drum)

Fairlead Cover

Roller fairlead covers are made of high-strength ABS co-laminate and attach easily to a roller fairlead.

PN 60390 Fits the Trans4mer, Classic Bumper, Combo Kit, and Jeep mounting kits.
PN 25584 Fits Enforcer Bumper
PN 35363 Fits Semi-Hidden Kit (F150 & Silverado only—not Sierra)
PN 25580 Fits Semi-Hidden Kit (Sierra & Super Duty)
PN 63499 Replacement fairlead cover for SST carrier cover (with mid-frame winch)
PN 63500 Replacement fairlead cover for SST carrier cover (with large-frame winch)



Roller fairlead cover PN 60390 for Trans4mer winch mounting system



WARN Tree Trunk Protector

Use this rigging strap along with a clevis/D-shackle to secure the winch wire rope to a wide variety of anchor points and objects. This strap is designed to help protect a live tree from the kind of damage a choker chain or wire rope might cause. Constructed of tough, high quality nylon web encasing red warning marker to indicate damaged webbing. End loops are reinforced with abrasion-resistant wear pads.

PN 61415 4" x 8' (10cm x 2.4m) tree trunk protector. Rated to 30,000 lbs. (13,607 kgs) breaking strength.
PN 25322 2" x 8' (5cm x 2.4m) tree trunk protector. Rated to 14,400 lbs. (6531 kgs)
PN 28882 1" x 8' (2.5cm x 2.4m) tree trunk protector. Rated to 6400 lbs. (2900 kgs)



WARN Recovery Straps

Use a recovery strap to “snatch” or pull out a stuck vehicle. Nylon webbing absorbs the shock of heavy pulls, while the elastic rebound energy aids in quick recovery. Constructed of tough, high quality nylon web encasing a red warning marker to indicate damaged webbing. End loops are reinforced with abrasion-resistant wear pads. Note: you should never use a recovery strap in a winching operation. For winching operations use a tree trunk protector strap or choker chain.



All WARN recovery and tree trunk protector straps include a red warning marker encased in the strap to indicate damaged webbing

PN 29899 3" x 30' (8cm x 9m) premium recovery strap. Rated to 21,600 lbs/9797 kgs Features a 18"/457mm nylon sliding sleeve to help prevent excessive wear caused by exposure to sharp objects.
PN 29898 2" x 30' (5cm x 9m) premium recovery strap. Rated to 14,400 lbs. (8165 kgs). Features a 18" (457mm) nylon sliding sleeve to help prevent excessive wear caused by exposure to sharp objects.
PN 11392 3" x 30' (8cm x 9m) standard recovery strap. Rated to 21,600 lbs. (9797 kgs)
PN 11391 2" x 30' (5cm x 9m) standard recovery strap. Rated to 14,400 lbs. (6531 kgs)

Hook Strap

The WARN hook strap is essential for proper handling of the wire rope hook. Use it to hold the hook and keep fingers away from the fairlead as the wire rope is being spooled in.

PN 69645



Gloves

Wire rope, through use, will develop “barbs” which can slice skin. It is extremely important to wear protective gloves while operating the winch or handling the wire rope. Leather/ cotton construction.

PN 14042



Guide to Winching Techniques

Informative booklet helps you learn the important facts concerning the proper use of your winch. Also available for immediate download free of charge at www.warn.com



PN 62885

Tow Hooks

Secured properly to your vehicle’s frame, tow hooks provide an attachment point for wire hooks, straps and chains, increasing your recovery options. Mounting hardware is included. Rated to 8,000 lbs/3,629 kgs capacity. Sold individually.

PN 13230 Black
PN 13200 Chrome



Choker Chain

Can be used to hook up to another vehicle or sharp object for an anchor point. 10' of 5/16" (3m of 8mm) grade 7 choker chain with hooks.

PN 26083



WARN Spydura™ Synthetic Rope

WARN Spydura™ synthetic Rope is lighter and easier to handle than traditional wire rope, so it’s ideal for pushing the limits on the trail.

- 100’ of 3/8”-diameter synthetic rope
- Constructed of a unique ultra high molecular weight polyethylene material
- Delivers high abrasion resistance and excellent tensile strength
- Coated with black urethane for increased UV and chemical resistance
- Includes a high temperature resistant sleeve on the first layer, and a unique self-tightening rope attachment designed to hold the rope secure on the winch drum
- A ballistic nylon sliding sleeve provides extra protection against abrasion and wear
- For winches with 10,000 lb. (4535 kgs) pull rating or less



Note: rope must be used with polished aluminum hawse fairlead

PN 87915

Replacement Wire Rope

Damaged wire rope must be replaced to safely operate any winch. Constructed of aircraft wire rope and galvanized to help resist corrosion. Includes swaged loop on one end, and wire rope terminal on the other.



Wire Rope Extension

Galvanized aircraft wire rope with loop on both ends allows you to extend the reach of your winch.

PN 25430 5/16” x 50’ (8mm x 15m)

PN 25431 3/8” x 75’ (9.5mm x 23m)



Replacement wire rope part numbers:

WINCH MODEL AND PN	WIRE ROPE LENGTH/DIAMETER	PART NUMBER
16.5ti, PN 68801	90’, 7/16” (27m, 11mm)	PN 61950
M15000, PN 47801	90’, 7/16” (27m, 11mm)	PN 61950
M15000, PN 478022	90’, 7/16” (27m, 11mm)	PN 61950
M12000, PN 17801 ^A	125’, 3/8” (38m, 9.5mm)	PN 38423
M12000, PN 265072 ^A	125’, 3/8” (38m, 9.5mm)	PN 38423
POWERPLANT DUAL FORCE HP, CE, PN 71800 ^A	125’, 5/16” (38m, 8mm)	PN 38312
POWERPLANT DUAL FORCE, HD, CE PN 71801 ^A	80’, 3/8” (24m, 9.5mm)	PN 74313
Endurance 12.0, PN 73010 ^A	80’, 3/8” (24m, 9.5mm)	PN 74313
12.0 XE, CE, PN 78600 ^A	80’, 3/8” (24m, 9.5mm)	PN 74313
9.5xp, PN 68500 ^A	100’, 5/16” (30m, 8mm)	PN 38314
9.5xp, CE, PN 86500 ^A	100’, 5/16” (30m, 8mm)	PN 38314
9.5cti, PN 97550 ^A	125’, 5/16” (38m, 8mm)	PN 38312
9.5cti, Multi-Mount Kit, PN 85760 ^A	125’, 5/16” (38m, 8mm)	PN 38312
9.5cti, Multi-Mount Kit for H2 Hummer, PN 85757 ^A	125’, 5/16” (38m, 8mm)	PN 38312
9.5ti, PN 67550 ^A	125’, 5/16” (38m, 8mm)	PN 38312
9.5ti, CE, PN 87550 ^A	125’, 5/16” (38m, 8mm)	PN 38312
9.5ti, Multi-Mount Kit, PN 65735 ^A	125’, 5/16” (38m, 8mm)	PN 38312
9.5ti, Multi-Mount Kit for H2 Hummer, PN 67912 ^A	125’, 5/16” (38m, 8mm)	PN 38312
9.0RC, PN 71550 ^A	50’, 3/8” (15m, 9.5mm) <i>(synthetic)</i>	PN 71717
XD9000i, PN 27550 ^A	125’, 5/16” (38m, 8mm)	PN 38312
XD9000i, Multi-Mount Kit PN 37441 ^A	125’, 5/16” (38m, 8mm)	PN 38312
XD9000, PN 28500 ^A	100’, 5/16” (30m, 8mm)	PN 38314
XD9000, CE PN 88500 ^A	100’, 5/16” (30m, 8mm)	PN 38314
XD9000, PN 265012 ^A	100’, 5/16” (30m, 8mm)	PN 38314
M8274-50, PN 3863 ^A	150’, 5/16” (46m, 8mm)	PN 38311
M8274-50, CE, PN 88631 ^A	150’, 5/16” (46m, 8mm)	PN 38311
M8274-50, PN 375832 ^A	150’, 5/16” (46m, 8mm)	PN 38311
M8000, PN 26502 ^A	100’, 5/16” (30m, 8mm)	PN 38314
M8000, PN 88502 ^A	100’, 5/16” (30m, 8mm)	PN 38314
M8000, PN 265032 ^A	100’, 5/16” (30m, 8mm)	PN 38314
M6000, PN 45880 ^A	80’, 5/16” (24m, 8mm)	PN 38310
M6000, PN 465052 ^A	80’, 5/16” (24m, 8mm)	PN 38310
M6000 SDP, PN 39116	50’, 5/16” (15m, 8mm)	PN 61346
VR8000, PN 86245 ^A	94’, 5/16” (28.6m, 8mm)	PN 86514
VR10000, PN 86255 ^A	94’, 3/8” (28.6m, 9.5mm)	PN 86515
VR12000, PN 86260 ^A	94’, 3/8” (28.6m, 9.5mm)	PN 86515

FOOTNOTES: ^A Includes loop thimble.

Neoprene Winch Covers

These winch covers are made of durable, tight-fitting Neoprene that resist water and cracking. A great way to protect your investment.


PN 81762 For PowerPlant Dual Force HP and HD

PN 81761 For 9.5cti and XD9000i winches




Soft Winch Covers


WARN soft winch covers are made of durable nylon-backed vinyl, and hold securely with elastic bungee cord fasteners.

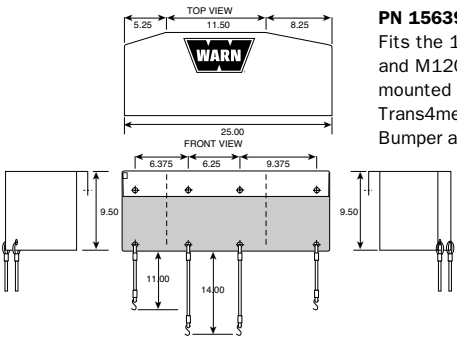

PN 15639 Fits the 16.5ti, M15000 and M12000 winches mounted on the Trans4mer, Classic Bumper and Flatbed Mount

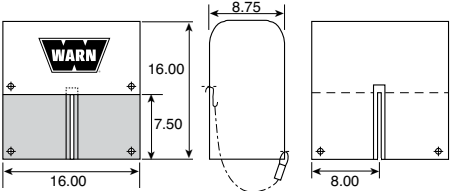


PN 8557 Fits the M8274-50 winch

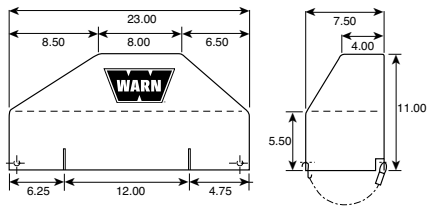


PN 13917 Fits 9.5cti, 9.5ti, XD9000i, and winches mounted on the Trans4mer, Combo Kit, Multi-Mount and Flatbed Mount


Fits 9.5xp, XD9000, M8000, VR8000, VR10000, VR12000 and M6000 (with control pack mounted behind winch motor), mounted on the Trans4mer, Combo Kit, Multi-Mount and Flatbed Mount

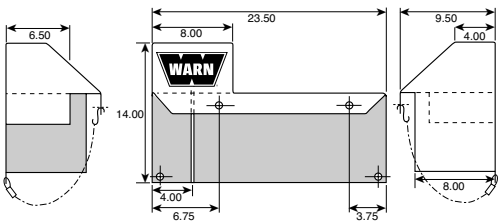

PN 13918 Fits 9.5xp, XD9000, M8000 and M6000 winches mounted on the Classic Bumper (when winch control pack is mounted behind the motor)

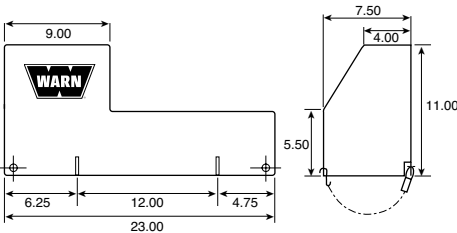

PN 13916 For the 9.5xp, XD9000, M8000, VR8000, VR10000, VR12000 and M6000 winches, mounted the Trans4mer and Combo Kit

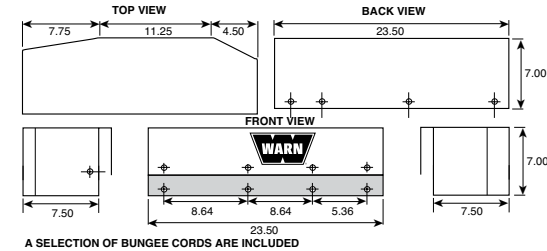

PN 18250 Fits 9.5ti and XD9000i mounted on the Classic Bumper

Hard Cover FOR XD9000i WINCH

Available for the XD9000i winch, the WARN hard winch covers are made from high impact co-laminate.

PN 34035 For XD9i winch with a roller fairlead, mounted on the Trans4mer system only.

PN 34700 For XD9i winch with a roller fairlead, mounted on the Jeep YJ.





SOMEWHERE IN CALIFORNIA. The Poison Spider Jeep Wrangler JK is rigged up with a WARN 9.5cti winch and ready to compete in the King of the Hammers. It may be street legal, but it's modified to the hilt for rock racing.

ACCESSORIES



PN 26769

Quick Connect Booster Cables

This kit provides convenient power connections that utilize the WARN heavy-duty Quick Connect system. Features 4 gauge copper cable construction. Includes:

- 4'/1.2m battery connector cable with Quick Connect plug for easy access to battery power without opening the hood
- 16'/5m booster assembly with connector clamps allow stranded vehicles' battery to be reached from almost any position
- Quick Connect plug dust cover keeps connector clean and ready to use
- Installation hardware for easy installation to either top or side post batteries

PN 26769 Complete kit as described above

PN 26771 16'/5m booster assembly with connector clamps only.



Quick Connector and 28"/71cm power lead. Connects to winch. **PN 36080**

Dust Cover (for Quick Connect plug) **PN 69847**

Quick Connect plugs only, no power lead. **PN 22680**

Quick Connector and 7.5'/2.2m power lead, for front mounting of portable winch **PN 26405**

Quick Connect POWER ACCESSORIES

Quick Connect power accessories provide a safe and simple power source for portable winches and booster cables. Plugs allow convenient connection and disconnection to the battery power source. Power connections can be added to the front, rear or both ends of the vehicle.

Heavy-duty, for winches over 3,000 lbs. capacity:

PN 22680 Quick Connect plugs for 2-4 ga. cable, one pair.

PN 36080 28"/71cm Quick Connect power cable, for attachment to winch control pack.

PN 26405 90"/2.2m Quick Connect power cable, for front of vehicle.

PN 32963 20'/6m Quick Connect power cable, for rear of vehicle. Includes power interrupt kit.

PN 32966 24'/8m Quick Connect power cable, for rear of vehicle. Includes power interrupt kit.

PN 69847 Quick Connect plug dust covers



Dual Battery Isolator

Because of the increased demands a winch and other accessories place on the DC power supply, many vehicles have multiple batteries—one to start the engine, and another to power accessories.

The WARN battery isolator prevents the problem of multi-battery drain. So no matter how drained your accessory battery becomes, it will never drain power from the battery you're depending on to start your engine.

PN 28022 120 amp rated.

PN 22630 95 amp rated. ('86 and newer GM applications require connector kit. Will not fit '73-76 Jeep vehicles)

PN 36494 GM Isolator Connector Kit. Required item when installing the PN 22630 isolator on '86 and newer GM applications.






Power Interrupt Kit

Allows you to connect aftermarket accessories to a battery lead and then disconnect power from a dash mounted switch. Recommended for extra protection. **PN 62132**

BAJA, BABY. If you're gonna be a Baja 1000 chase vehicle like this Chevy Silverado, you better be able to see through clouds of dust: try racks of WARN W700D-HID lights and a healthy appetite for grit.

WARN HIGH-PERFORMANCE AUXILIARY LIGHTS:
BECAUSE A DAY OF OFF-ROADING SOON BECOMES A NIGHT
OF GETTING HOME

When you're out on the trail time flies, and day can easily slip into night. You need lights that forego fancy styling for a rugged functionality that can light your way back to the pavement. WARN lights have the reliability and durability that come built into the WARN name. This year Warn Industries has raised the bar in performance and value. Leading the way is the new W-Series with wireless control. They're easy to install, and easy on the wallet.

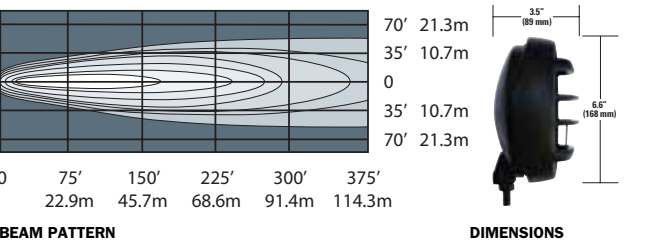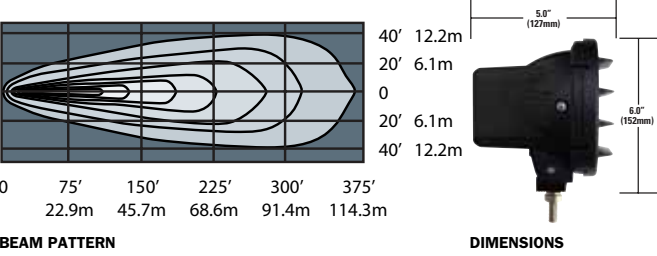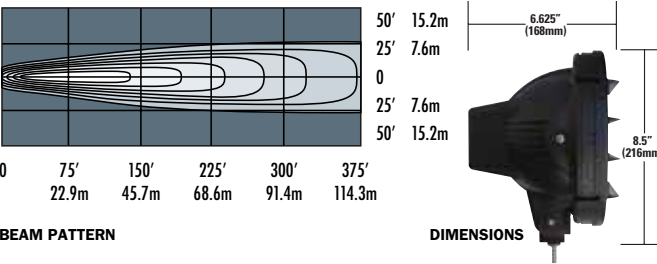

W700D-HID DRIVING LIGHTS

At 7" (17.8 cm) in diameter, these HID lights deliver outstanding range and spread, and will blaze a trail of intense white light through the darkest off-road terrain. The Xenon HID bulb is 300% brighter—and lasts 10 times longer—than 55W halogens. Features include tempered clear glass lenses, vaporized aluminum over die-cast aluminum reflectors for outstanding light output, and impact- and corrosion-resistant polymer cases for great weather resistance. The integrated ballast and wireless control switch allow for a straightforward installation.

PN 82405 (kit)

PN 82583 (single light only—no remote)



Kit contains two lights, mounting hardware, wireless control, transmitter, wiring, rock guards and covers

W400D-HID DRIVING LIGHTS

These 4" (10.2 cm) diameter HID lights have the extra light output, beam spread and reach you need to drive off-road with confidence. They're 300% brighter than a 55W halogen lights, have lower amp draw and last 10 times longer. Features include durable tempered clear glass lenses, sturdy vaporized aluminum over die-cast aluminum reflectors for maximum light output, and sealed corrosion-resistant polymer outer cases for weather resistance. A self-contained ballast and a wireless control switch mean installation is easy.

PN 82400 (kit)

PN 82579 (single light only—no remote)



Kit contains two lights, mounting hardware, wireless control, transmitter, wiring, rock guards and covers


W650D DRIVING LIGHTS

These big 6.5" (16.5 cm) halogen lights deliver outstanding performance, great value, and are ideal for increased visibility on the trail. Features include 55W H3 halogen bulbs, hardened clear glass lenses, vaporized aluminum over steel reflectors for maximum output, steel cases with a powder-coated finish for great weather resistance, and a thin profile for increased mounting options. These lights also come with a wireless control switch for simple installation.

PN 82420 (kit)

PN 82573 (single light only—no remote)



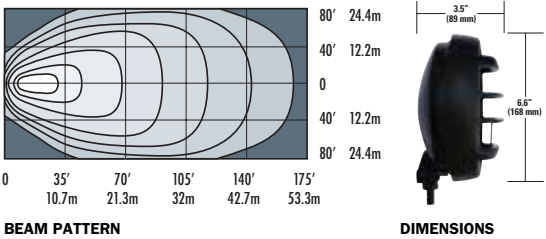


W650F FOG BEAMS

Designed to light the way through foggy, rainy, dusty, or snowy conditions, these fog beams feature large 6.5" (16.5 cm) diameter lenses and broad 70-degree beam spread. The hardened clear glass lenses have a dichroic coating, for a low-glare yellow light. Features include 55W H3 halogen bulbs, vaporized aluminum over steel reflectors for great light output, thin-profile powder-coated steel cases for excellent water resistance, and a wireless control switch for hassle-free installation.

PN 82425 (kit)
PN 82574 (single light only—no remote)

Kit contains two lights, mounting hardware, wireless control, transmitter, wiring, rock guards and covers

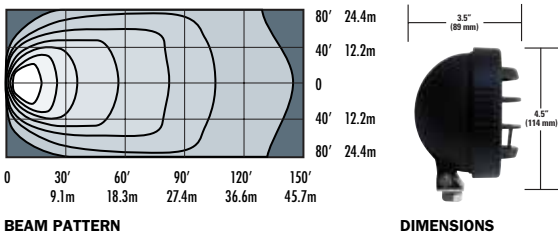


W350F FOG BEAMS

At 3.5" (8.9 cm) in diameter, these lights are the optimal medium-sized fog lights. The 55W H3 halogen bulb and 66-degree bar-shaped light beam deliver great low-visibility performance. Features include hardened clear glass lenses; vaporized aluminum over steel compound curve reflectors for maximum light output; and impact-resistant polymer cases with O-ring seals for excellent water resistance. These lights also have a wireless control switch, so there's no need to run wires through the firewall.

PN 82410 (kit)
PN 82567 (single light only—no remote)



Kit contains two lights, mounting hardware, wireless control, transmitter, wiring, rock guards and covers

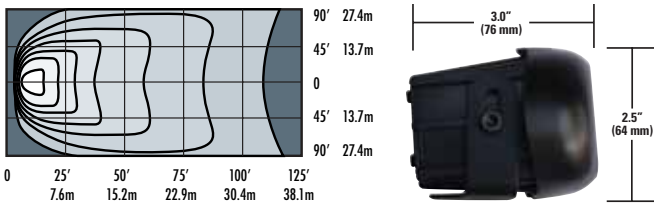

W2030F FOG BEAMS

These compact 2" x 3" (5.1 cm x 7.6 cm), 55W halogen lights provide 66-degree bar-shaped beams of light, perfect for use in fog, rain, dust, or snow. Features include impact-resistant hardened blue glass lenses; durable vaporized aluminum over die-cast aluminum compound curve reflectors for maximum light output; and lightweight, corrosion-resistant aluminum cases. The new wireless control switch allows for easy installation without having to drill through the firewall.

PN 82415

Kit contains two lights, mounting hardware, wireless control, transmitter, wiring, rock guards and covers

SDB-160HB

100,000 CANDLEPOWER DRIVING/SPOT LIGHT


The SDB-160 HB uses a Free Curve reflector. A Free Curve reflector is very efficient because it uses the whole reflector. This allows the spot beam to illuminate approximately 770 feet ahead and the driving beam illuminates the entire surface in front of the vehicle.

The SDB-160 HB has an internal light frame to protect the lamp from vibration and shock when running off-road, plus an impact resistant polycarbonate body protects the exterior. Heat and weather resistant EPT material helps protect lamp integrity.

The lens of the SDB-160 HB is protected by a stone guard in a "V"-shape to let air cool the lens surface, allowing for extended operation of the lamp. Hardened glass lens has excellent heat and thermal shock resistance, strength and translucency.


Easily adjustable illumination angle to 15° up or down. Dual beam control switch includes relay control feature and LED illumination when lamps are in use. Includes wiring and dash mounted control switch.

PN 37606

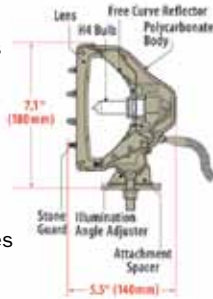

Specs:
BulbH4
Rating 12V 100/90-Watt
Max. brightness100,000CD

Effective Range:
Driving beam410'/125m
Spot beam770'/235m

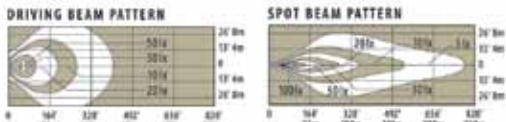

Note: recommended for off-road use only.

SDB-210HB



200,000 CANDLEPOWER DRIVING/SPOT LIGHT

The SDB-210 HB uses a precision design Free Curve reflector that is outstandingly smooth and heat resistant. It reflects light efficiently due to the vaporized aluminum applied to the reflector surface. Aggressive off-road drivers will appreciate a lamp with a spot beam able to illuminate approximately 853 feet ahead, with a concentrated lighting pattern and a driving beam wide enough to supplement vehicle headlights by illuminating the entire surface in front of the vehicle. Hard off-road driving generates vibration and shock. The SDB-210 HB has an internal light frame to protect the lamp and a stone guard to protect the lens. The body is constructed of a polycarbonate resin which has excellent impact resistance. The SDB-210 HB has a weather resistant rubber seal to help protect the lamp integrity. The hardened glass lens gives excellent heat and thermal shock resistance, strength and translucency. The lamp illumination angle can be adjusted to 15° up or down to fine-tune the light pattern. Dual beam control switch includes relay control feature and LED illumination when lamps are in use. Includes wiring and dash mounted control switch.

PN 37609

Specs:
Bulb H4
Rating12V 100/90-Watt
Max. brightness 200,000CD

Effective Range:
Spot beam 853'/260m
Driving beam492'/150m

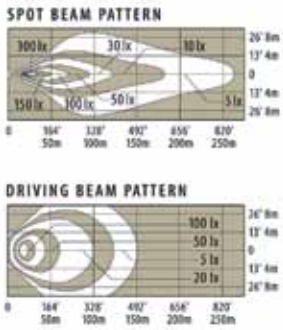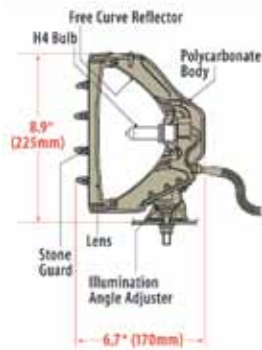

Note: recommended for off-road use only.

HARD COVERS FOR WARN SDB LIGHTS



Hard Cover for SDB-160 (Single)..... PN 38406
Hard Cover for SDB-210 (Single)..... PN 38409

SDB LIGHTS, replacement bulbs and mounting bracket

SDB-Series, replacement bulb, H2, 55 watt.....PN 38392
SDB-Series, replacement bulb, H3, 55 watt coated (dichroic).....PN 38393
SDB-Series, replacement bulb, H4, 60/55 watt.....PN 60777
SDB-Series, replacement bulb, H4, 90/100 watt.....PN 38394
SDB-Series "L" Mounting Brackets (pair)PN 38405
SDB-Series, replacement switchPN 38402



MOAB: A GNARLY RIM TRAIL. Navigating the steep Moab Rim Trail is old hat to this veteran WARN driver (aka the mayor of White-Knuckle City). Right about here, you gotta love those WARN Premium Hubs and Rocksliders.

4WD HUBS

For more than 60 years, WARN has been offering manual hub conversions—it’s how we started. Our hubs provide increased durability and fuel economy, and are easy to install. What else would you expect from the company that invented the locking hub?



Premium Manual Hubs

The WARN Premium Hub is a no-compromise hub designed for the hardcore off-roader or truck owner who will accept nothing less than the industry standard in performance.

The all metal construction and ZA Alloy dial ensure years of reliable functioning. This dial requires a full 9/10 ths of a turn to ensure positive engagement of the inner drive gear to the clutch ring. To make sure they stay engaged, WARN Premium Hubs use a thick internal wave spring and heavy dial detents.

We know our Premium Hubs will be used hard, so we build them to last. We’re so confident, that all WARN hubs are covered by a lifetime limited warranty.


Standard Manual Hubs

WARN Standard Hubs are the ideal choice for factory hub replacement. These are the same basic hubs Warn Industries has supplied to OEMs around the world. WARN standard hubs share many features with our Premium Hubs such as a 4140 steel clutch ring and inner drive gear, and a precision cast hub body.

WARN Standard Hubs are available in three styles to fit most 4WD vehicles: Internal Mount, External Mount and Flange Mount.

All WARN® Premium Hubs feature:

- 9/10 turn dial for robust engagement/disengagement
- Heavy detents for positive engagement
- Wave spring technology increases reliability over standard coil springs
- All metal construction
- ZA Alloy dial with dual seals keep contaminants out

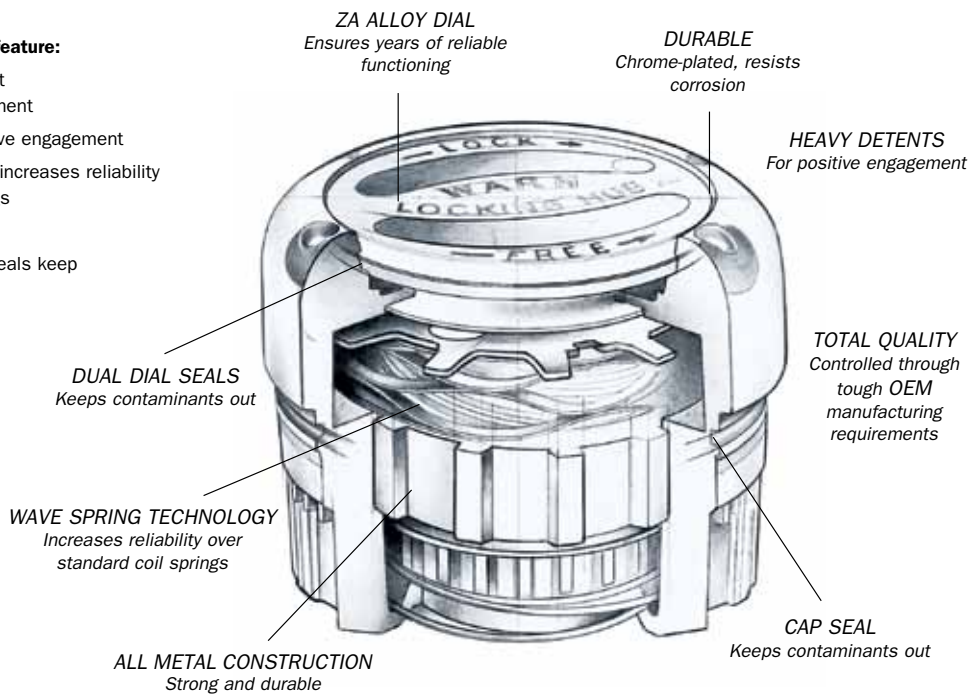

FOOTNOTES:

- A Very early vehicles may require that the threaded axle end be cut off.
- B Will not fit '87-early '88 model vehicles, flange mount. (Dealer item only. See Ford parts & service).
- C When replacing automatic hubs with manual hubs, you must also purchase Spindle Nut Conversion Kit #27988 for '83-'89 vehicles; Conversion Kit #32720 for '90-'97.
- D Very early '90 vehicles with 23 tooth axle spline require 1989 model hubs.
- E When replacing factory automatic hubs with manual hubs, you must also purchase Spindle Nut Conversion Kit #27988 for '83-'89 vehicles; Conversion Kit #32720 for '90-'97.
- F Will not fit vehicles with factory optional chrome wheels.
- G Vehicles with full-time 4WD will require a transfer case conversion kit.
- H When replacing automatic 3 hole cap screw hubs with manual hubs, you must purchase corresponding spindle nut conversion kit per application chart.
- I Hub Set includes Stud Kit (PN 38003)
- J Not for front axle disconnect systems.
- K Will not fit dual wheel application
- L International only; will not fit vehicle produced in North America

4WD HUBS APPLICATIONS	Year	Cautionary Footnotes	Spline Count	Standard Manual PN	Premium Manual PN	Spindle Nut Kit Std/Prem	HUB SERVICE KIT Std Prem	
CHEVROLET/GMC								
Blazer, Jimmy, Suburban.....	'69-91	G, H	19	9790	20990	32720	11967	20825
1/2 Ton Pickup	'69-87	G, H	19	9790	20990	32720	11967	20825
3/4 Ton Pickup	'60-76	G	19		9072			7302
3/4 Ton Pickup	'77-87	G, H	19	9790	20990	32720	11967	20825
1 Ton Pickup	'76-87	H	30	11690	38826	32721	11714	
1 Ton Pickup, V-Series Crew Cab	'88-90	H	30	11690	38826	32721	11714	
Geo Tracker	'89-00	J	26	39198	34581			7309
DODGE								
1/2 Ton Pickup	'57-68		19		9072			7302
1/2 Ton Pickup & Ramcharger	'69-74		19	9790	20990		11967	20825
1/2, 3/4 Ton Pickup & Ramcharger.....	'80-93		19	9790	20990		11967	20825
3/4 Ton Pickup	'90-93		30	11690	38826		11714	
3/4 Ton Pickup	'57-74		19		9072			7302
1 Ton Pickup.....	'90-93		30	11690	38826		11714	
FORD								
Bronco II, Ranger	'83-89	E, D	23	29070		27988	39128	
Explorer	'90-94	D, E	27	29071		32720	39128	
Ranger	'90-97	E, D	27	29071		32720	39128	
Bronco	'66-96	B, G, H	19	9790	20990	32720	11967	20825
1/2 Ton Pickup	'59-96	B, G, H	19	9790	20990	32720	11967	20825
3/4 Ton Pickup	'59-75		19	9790	20990		11967	20825
3/4 Ton Pickup, Light Duty	'77.5-97	H	19	9790	20990	32720	11967	20825
3/4 Ton Pickup, Heavy Duty	'63-77	G	19		9072			7302
3/4 Ton Pickup, Crew Cab only	'76-77.5		19		29063			7302
3/4 Ton Pickup, Heavy Duty	'78-97	H	30	11690	38826	32721	11714	11714
1 Ton Pickup.....	'78-97	H	30	11690	38826	32721	11714	11714
Super Duty (F-250/350; Excursion)	'99-04	K	30	11690	38826		11714	11714
Courier, Ranger Int'l only	'99-04	L	26	61572				
INTERNATIONAL HARVESTER								
Scout	'61-70		10		29062			7300
Scout II, Terra, Traveler	'71-80		27		9062			7300
1/2 Ton Pickup, Travelall	'68-75		19	9790	20990		11967	20825
1/2 Ton, 3/4 Ton Pickup	'56-72		19		9072			7302
ISUZU								
Trooper I	'83-86		24		61424			61692
Trooper II	'87-93		17		61385			61693
Rodeo	'91-99		17		61385			61693
JEEP								
CJ, Universal, M38A1, Willys	'71 & Prior.....	A	10		29062			7300
CJ, Universal (6 bolt)	'72-80	G	27		9062			7300
CJ, Universal Scrambler (5 bolt)	'81-86	F	27	28751				
Jeepster C101 Commando	'66-71		10		29062			7300
Jeepster C104	'72-73		27		9062			7300
Gladiator, Wagoneer, Pickup	'73 & Prior.....		10		29062			7300
Full size Wagoneer, Cherokee, J-10 Pickup, Commander	'74-91	G	19	9790	20990		11967	20825
J-20 Pickup (heavy axle)	'72-76		19		9072			7302
J-20 Pickup	'77-87		19	9790	20990		11967	20825
J4800 Pickup, Camper Spl.	'69-74		10		6094			7302
Jeep Station Wagon, Pickup	'65 & Prior.....		10		29062			7300
Hilux Int'l with Torsion bar susp.....	'98-01	C			28761	29918		7309
KIA								
Sportage, Retona	'95-02		26	60247				
Sportage, Retona	'95-02		26			Automatic Locking Hubs 61918		
MAZDA								
Pickup	'94-97	E	27	29071		32720		
Navajo	'90-94	E	27	29071		32720		
B Series, Fighter, Int'l only	'99-01	L	26	61572				
NISSAN								
Pickup	'84-86.5	I	26		29087			29061
Pickup, Pathfinder	'86.5-89	I	27		28739			29061
Pickup, 4 cylinder	'90-93	I	27		28739			29061
Pickup (incl. Frontier), 4 cyl.	'94-01	I	28		29091			29061
Pickup (incl. Frontier), Pathfinder, 6 cyl.....	'90-01	I	28		29091			29061
Xterra	'00	I	28		29091			29061
SUZUKI								
Samurai, Sierra	'82-01	J	26		34581			7309
Sidekick, X-90, Vitara, Escudo	'89-01	J	26	39198	34581			7309
TOYOTA								
Pickup, Hilux, 4-Runner, with ADD	'86-95	C	26		28761	29918		7309
Landcruiser.....	'63-75		6		28781			7309
Landcruiser	'76-87	C	30		28771	29918		7309
Pickup, Hilux, 4-Runner	'76-85	C	30		28771	29918		7309
T100	'93-99	C	26		28761	29918		7309
T100, W/ADD	'93-99		26		28761	29918		7309
Van, Previa.....	'86-92	C	26		28761	29918		7309
Tacoma(w/factory man.hubs)	'95-01		26		60459			7309
Hilux Int'l with Torsion bar susp.....	'98-01	C			28761	29918		7309
CUSTOM APPLICATIONS								
Dana 60 axle with 35 spline outer shafts (front only)			35		62672			11714



Ford Super Duty

WARN 4X FLARES

4X Flares are ideal for just about every truck with larger tires or custom wheels. They mount inside the fender well with screws and are sealed to the fender rim with heavy-duty adhesive tape, keeping out moisture, dirt and road salt to help prevent rust. They are made of high impact ABS co-laminate, which exhibits maximum flexibility and durability. Standard 4X Flares come in a black finish, but are easily painted to match any color. Sold in pairs for either the front or rear of your vehicle, with sets of 4 manufactured for Jeep CJ, YJ and TJ.



'07 Chevy Suburban



'07 GMC Sierra



LOST IN OREGON. Our outfitted Can-Am Commander wears a WARN bumper, XT40 winch, Body Armor, and XT Lights. It all comes in handy when you're blasting through flooded trails, silt, and mud.

WARN POWERSPORTS: BUILT BY RIDERS FOR RIDERS

WARN Powersports products are built for riders by riders. And we don't mean occasional weekenders or wannabes. We mean the core. The crew behind our products are hardcore riders who ensure authenticity goes into everything we make.

When we're not riding, we're designing innovative products like the new WARN portable winch line. Versatile and ultra-light, weighing in at just over eight pounds, these new RT and XT winches redefine portability.

No matter what you ride – ATV, side x side, or motorcycle – WARN products have your name on them. Our full line of durable products are designed to perform at a high level. Because we ride like you do. All out, and all the time.

XT



WARN XT40 The Most Extreme Side X Side Winch on the Market

If you've got a Side X Side and are looking to outfit it with the most extreme Side X Side winch on the market, look no further than the XT40. It has 50' of light-weight, easy-to-handle synthetic rope; a wireless control system with a 50' range, plus a mini-rocker control switch; and a sealed drivetrain to keep the elements out and the winch working properly. Other features include an all-metal 3-stage planetary geartrain for smooth, reliable operation; a patented disc brake for outstanding control; a short-throw clutch; and an efficient motor for longer pulls with less battery drain.

PN 77500



Kit includes synthetic rope, handheld wireless control and handlebar-mounted mini-rocker control switch

SPECIFICATIONS:

Winch model: XT40

Part number: 77500

Rated line pull: 4,000 lbs. (1814 kgs) single-line

Motor: 12V permanent magnet

Sealing: Full

Geartrain: 3-stage, all-metal

Rope material: Synthetic

Rope length & diameter: 50' x 7/32" (15m x 5.5mm)

Primary control: Handle-bar mini-rocker

Remote control: Wireless remote

Best for plow lifting: Yes

Disc brake: Yes

Warranty: Limited lifetime

Clutch control: Ergonomic dial

Wiring diameter: 6-Gauge

RT



WARN RT40 A Winching Workhorse for Side X Sides

Riders looking for on-the-job performance and outstanding durability will want the RT40 for their Side X Side. The winch showcases 4,000 lbs. of pulling muscle and 55' of durable wire rope—the longest in the WARN Powersports lineup. This winch has tons of standard features including a patented disc brake for great control; a fully sealed drivetrain; a reliable and smooth all-metal 3-stage planetary geartrain; short-throw clutch; a corded remote and mini-rocker control switch for winch operation; and an efficient electrical system for long pulls and less battery drain.

PN 77000



Kit includes wire rope, handheld corded remote control, and handlebar-mounted mini-rocker control switch

SPECIFICATIONS:

Winch model: RT40

Part number: 77000

Rated line pull: 4,000 lbs. (1814 kgs) single-line

Motor: 12V permanent magnet

Sealing: Full

Geartrain: 3-stage, all-metal

Rope material: Wire

Rope length & diameter: 55' x 7/32" (17m x 5.5mm)

Primary control: Handle-bar mini-rocker

Remote control: Corded remote

Best for plow lifting: No

Disc brake: Yes


Warranty: Limited lifetime

Clutch control: Ergonomic dial

Wiring diameter: 6-Gauge

RT and XT winch performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	25 (7.6)	31	1/4000 (1814)
1000 (455)	16 (4.9)	106	2/3440 (1560)
2000 (907)	11 (3.3)	175	3/2958 (1342)
3000 (1360)	7 (2.1)	245	4/2544 (1154)
4000 (1814)	4 (1.2)	308	

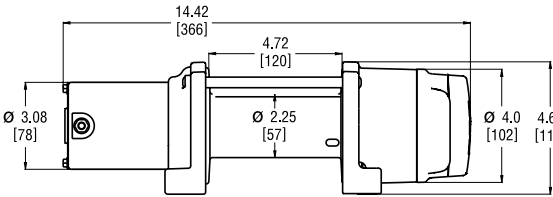

Winch dimensions:
14.4" L. x 4.5" D. x 4.7" H.
(36.6cm L. x 12cm D. x 12cm H.)

Mounting bolt pattern:
3.0" x 6.59" (76mm x 167mm)



WARN XT30 An Extreme Terrain Winch for Large-Bore Utility ATVs

Riders looking for the most extreme winch on the ATV market will want the XT30. It has a 3,000 lb. line capacity to pull the biggest ATVs; a wireless control system with a 50’ range for increased winching options; a short-throw clutch, and 50’ of lightweight and easy-to-handle synthetic rope—great for vehicle recovery and plow lifting. Full winch sealing helps keep the elements out, and the all-metal 3-stage planetary geartrain will run smoothly for years. The patented disc brake provides enhanced braking performance, and the efficient electrical system minimizes battery drain.

PN 76500



Kit includes synthetic rope, handheld wireless control and handlebar-mounted mini-rocker control switch

SPECIFICATIONS:

Winch model: XT30

Part number: 76500

Rated line pull: 3,000 lbs. (1361 kgs) single-line

Motor: 12V permanent magnet

Sealing: Full

Geartrain: 3-stage, all-metal

Rope material: Synthetic

Rope length & diameter: 50’ x 3/16” (15m x 5mm)

Primary control:

Handlebar mini-rocker

Remote control: Wireless remote

Best for plow lifting: Yes

Disc brake: Yes

Warranty: Limited lifetime

Clutch control: Ergonomic dial

Wiring diameter: 6-gauge



WARN RT30 A Powerhouse Winch for Big Utility ATVs

With 3,000 lbs. of pulling power and 50’ of durable wire rope, the RT30 is a powerhouse ATV winch. Get-it-done features include an all-metal 3-stage planetary geartrain; full sealing to help keep the elements out; and a patented disc brake for optimum braking performance. With a corded remote, a handlebar-mounted mini-rocker switch and a short-throw clutch, the RT30 provides a great combination of power and control.

PN 76000

PN 81500 (CE, International sales only)



Kit includes wire rope, handheld corded remote control, and handlebar-mounted mini-rocker control switch

SPECIFICATIONS:

Winch model: RT30

Part number: 76000, 81500 (CE, international sales only)

Rated line pull: 3,000 lbs. (1361 kgs) single-line

Motor: 12V permanent magnet

Sealing: Full

Geartrain: 3-stage, all-metal

Rope material: Wire

Rope length & diameter: 50’ x 3/16” (15m x 5mm)

Primary control:

Handlebar mini-rocker

Remote control: Corded remote

Best for plow lifting: No

Disc brake: Yes


Warranty: Limited lifetime

Clutch control: Ergonomic dial

Wiring diameter: 6-gauge

RT and XT winch performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	18 (5.5)	15	1/3000 (1360)
1000 (455)	13 (4.0)	67	2/2580 (1170)
2000 (907)	8 (2.4)	125	3/2220 (1007)
3000 (1360)	4 (1.2)	198	4/1910 (866)

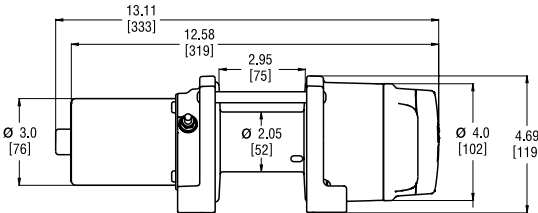

Winch dimensions: 13.1” L. x 4.53” D. x 4.69” H. (33.3Cm L. x 11.5Cm D. x 11.9Cm H.)

Mounting bolt pattern: 3.0” x 4.87” (76mm x 124mm)



WARN XT25 For Utility ATVs 350cc and Up

Take the trail less traveled with the XT25. With its 2,500 lb. line capacity and 50’ of synthetic rope, you’ll be able to recover your vehicle (or your buddy’s vehicle) with ease; it’s great for plow lifting, too. The XT25 showcases an all-metal 3-stage planetary geartrain for smooth, reliable operation; a handlebar-mounted mini-rocker switch for convenient control; a short-throw clutch; and fast line speed. A patented disc brake ensures positive control while winching; full sealing keeps the elements out; and the efficient electrical system minimizes battery drain and keeps your winch working time after time.

PN 75500

PN 81000 (CE, International sales only)



Kit includes synthetic rope and handlebar-mounted mini-rocker control switch

SPECIFICATIONS:

Winch model: RT25

Part number: 75500, 81000 (CE, international sales only)

Rated line pull: 2,500 lbs. (1361 kgs) single-line

Motor: 12V permanent magnet

Sealing: Full

Geartrain: 3-stage, all-metal

Rope material: Synthetic

Rope length & diameter: 50’ x 3/16” (15m x 5mm)

Primary control:

Handlebar mini-rocker

Remote control: None

Best for plow lifting: Yes

Disc brake: Yes

Warranty: Limited lifetime

Clutch control: Ergonomic dial

Wiring diameter: 8-gauge



WARN RT25 The Best Selling ATV Winch for Work or Play

The RT25 is a versatile, durable winch with a just-right 2,500 lb. pulling capacity and 50’ of durable wire rope—making it a perfect fit for Utility ATVs 350cc and up. This industry-standard winch has an all-metal 3-stage planetary geartrain; full sealing to keep the elements out; a patented disc brake for excellent control; a short-throw clutch; and an efficient electrical system for less battery drain. A handlebar-mounted mini-rocker switch provides simple, effective control.

PN 75000

PN 80500 (CE, International sales only)



Kit includes wire rope and handlebar-mounted mini-rocker control switch

SPECIFICATIONS:

Winch model: XT25

Part number: 75000, 80500 (CE, international sales only)

Rated line pull: 2,500 lbs. (1234 kgs) single-line

Motor: 12V permanent magnet

Sealing: Full

Geartrain: 3-stage, all-metal

Rope material: Wire

Rope length & diameter: 50’ x 3/16” (15m x 5mm)

Primary control:

Handlebar mini-rocker

Remote control: None

Best for plow lifting: No

Disc brake: Yes


Warranty: Limited lifetime

Clutch control: Ergonomic dial

Wiring diameter: 8-gauge

RT and XT winch performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0	18 (5.5)	15	1/2500 (1134)
500 (227)	16 (4.9)	39	2/2150 (975)
1500 (680)	10 (3.0)	96	3/1845 (836)
2500 (1134)	5 (1.5)	157	4/1586 (719)

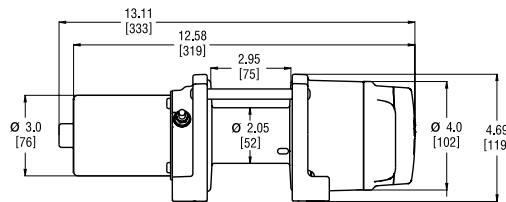

Winch dimensions: 13.1” L. x 4.53” D. x 4.69” H. (33.3Cm L. x 11.5Cm D. x 11.9Cm H.)

Mounting bolt pattern: 3.0” x 4.87” (76mm x 124mm)



NEW

XT

WARN XT17 Portable Winch

The Ultimate Backup for Serious Adventure Touring

It's light. It's powerful. And it shares your sense of adventure. The XT17 winch can rein in up to 1,700 pounds of pulling capacity. And talk about easy to carry—aluminum construction, 40 feet of synthetic rope, and a new 8.5lb design will have you taking it everywhere.

PN 85700

(hand-held corded remote with rigging strap and wiring)

PN 85900 (handlebar-mounted winch control with rigging strap and wiring)

SPECIFICATIONS:

Winch model: XT17 portable

Part number: 85700 (controls on winch), 85900 (controls on vehicle)

Rated line pull: 1,700 lbs. (771 kg) single-line

Sealing: Motor

Geartrain: 3-stage planetary

Rope material: Synthetic

Rope length & diameter: 40' x 5/32" (12m x 4mm)

Control:

PN 85700 – corded remote control with 10' (3m) lead
PN 85900 – handlebar mounted rocker switch

Best for plow lifting: No

Brake: Mechanical brake standard

Warranty: Limited lifetime

Clutch control: Cam activated

Wiring diameter: 10-Gauge

12V performance specs (first layer of drum)

Line Pull Lbs. (Kgs.)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (Kgs.)
0	13.8 (4.2)	6	1/1700 (771)
500 (227)	10.2 (3.0)	27	2/1496 (678)
1000 (455)	6.4 (1.9)	44	3/1316 (597)
1700 (771)	4.6 (1.4)	65	4/1158 (525)

NEW

RT

WARN RT15 Portable Winch

Ideal for Lightweight Vehicles and Utility Work

Versatile tool for utility work, with a pulling capacity of 1,500 pounds. Comes with 25 feet of durable steel wire rope. Hand-held remote control attaches to the winch, making it easy to transfer between vehicles. Use with any 12V battery-equipped vehicle.

PN 86380

(hand-held corded remote with rigging strap and wiring)

SPECIFICATIONS:

Winch model: RT15 Portable

Part number: 86360

Rated line pull: 1,500 lbs. (680 kgs) single-line

Sealing: Motor

Geartrain: 3-stage planetary

Rope material: Wire

Rope length & diameter: 25' x 5/32" (7.6m x 4mm)

Control: Corded remote control with 10' (3m) lead

Best for plow lifting: No

Brake: Mechanical brake standard

Warranty: Limited lifetime

Clutch control: Cam activated

Wiring diameter: 10-gauge

12V performance specs (first layer of drum)

Line Pull Lbs. (Kgs.)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (Kgs.)
0	15 (4.6)	6	1/1500 (680)
500 (227)	11 (3.3)	27	2/1320 (599)
1000 (455)	7 (2.1)	44	3/1162 (527)
1500 (680)	5 (1.5)	65	4/1020 (463)

NEW

PORTABLE WINCH CARRY PLATE

Conveniently stow your winch on the rear of your bike, inside panniers, or any other location for quick easy access. Works with RT15 and XT17 Portable winches. **PN 86595**

ULTRALIGHT UNIVERSAL WINCH CARRY PLATE.

Aluminum construction and durable black powder-coated finish (bolt pattern fits BMW F800GS rack. See website for additional vehicle applications). **PN 86600**

Note: plate is designed to stow the winch, not rated for pulling.



SE OREGON DESERT COUNTRY. Have portable winch, will travel. The ultra-light WARN XT17 Portable winch makes for a valuable passenger when you're adventure touring in the remote Oregon desert.





WARN XT15 For Sport and Utility ATVs Under 300cc

With a 1,500 lb. pulling capacity and 40' of lightweight, easy-to-handle synthetic rope, the XT15 was tailor-made for sport quads and small ATVs. Features include a patented disc brake for excellent control; a 3-stage planetary geartrain for smooth, reliable operation; a sealed motor to keep the elements out; and a handlebar-mounted mini-rocker control for easy operation. This winch is also great for plow lifting.

PN 78500



Kit includes synthetic rope and handlebar-mounted mini-rocker control switch

SPECIFICATIONS:

Winch model: XT15

Part number: 78500

Rated line pull: 1,500 lbs. (680 kgs) single-line

Sealing: Motor

Geartrain: 3-stage planetary

Rope material: Synthetic

Rope length & diameter: 40' x 5/32" (12m x 4mm)

Primary control: Handlebar mini-rocker

Remote control: None

Best for plow lifting: Yes

Disc brake: Yes

Warranty: Limited lifetime

Clutch control: Cam activated

Wiring diameter: 10-gauge



WARN RT15 A Pulling Tool for Smaller Quads With Big Ideas

The RT15 is the perfect all-around winch for sport quads and small ATVs under 300cc. Its 1,500 lb. capacity and 50' of wire rope turns compact ATVs into workhorses. Features include a 3-stage planetary geartrain; a patented disc brake for great control; a sealed motor to keep the elements out; and a handlebar-mounted mini-rocker switch for power in/ power out. An efficient electrical system for less battery drain and a hawse fairlead round out the RT15's features.

PN 78000



Kit includes wire rope and handlebar-mounted mini-rocker control switch

SPECIFICATIONS:

Winch model: RT15

Part number: 78000

Rated line pull: 1,500 lbs. (680 kgs) single-line

Sealing: Motor

Geartrain: 3-stage planetary

Rope material: Wire

Rope length & diameter: 50' x 5/32" (15m x 4mm)

Primary control: Handlebar mini-rocker

Remote control: None

Best for plow lifting: No

Disc brake: Yes

Warranty: Limited lifetime

Clutch control: Cam activated


Wiring diameter: 10-gauge

RT and XT winch performance specs (first layer of drum)

Line Pull Lbs. (Kgs.)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (Kgs.)
0	15 (4.6)	6	1/1500 (680)
500 (227)	11 (3.3)	27	2/1320 (599)
1000 (455)	7 (2.1)	44	3/1162 (527)
1500 (680)	5 (2.1)	65	4/1020 (463)

Winch dimensions:
10.3" L. x 4.0" D. x 4.6" H.
(26cm L. x 10cm D. x 12cm H.)

Mounting bolt pattern:
3.0" x 4.8" (76mm x 122mm)

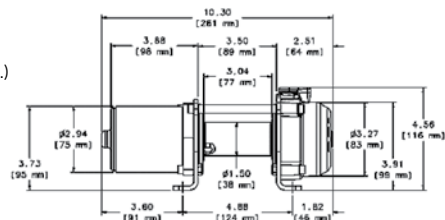

Dual Battery Control Kit

- Lets you use two batteries, but saves the main battery for essential functions, such as starting the vehicle.
- Engineered specifically to give maximum power during winch power-in operation.
- For use with 12-volt accessories such as winches, lights, stereos and more.
- Minimizes charging system overload; if both batteries need charging, the main battery is charged first.
- Optional manual override forces a parallel connection when you need extra power for accessories or jump-starting another vehicle.
- Designed for use with 12-volt DC magneto or alternator charging systems.
- Easy to install; includes all necessary hardware. (Second battery not included)

PN 77977



Wireless Control System for ATVs and Side X Sides

The WARN Wireless Control System will work with WARN 1.5ci, 2.5ci, 3.0ci winches; and all RT/XT series winches.* The system is quick and easy to install thanks to a wiring harness with integrated antenna and included mounting hardware. The system lets you operate your winch from anywhere within a 50' radius, giving you more recovery options. The system's two-button transmitter allows for easy operation, even while wearing gloves. A two-color LED provides instant feedback during the winching process, and the system shuts off automatically after three minutes (or it can be turned off manually) to conserve battery life. A convenient handlebar or dash-mounted holster securely holds the transmitter when not in use.

PN 74500 Wireless Winch Control System

PN 74520 Transmitter only

* May not work with WARN co-branded winches. Call WARN Customer Service for details.



ACCESSORIES

A) Winching Accessory Kit

Double your pulling power, change your pulling direction, and keep your winch in proper working order. The WARN Accessory Kit is essential gear for getting the most out of your WARN Powersports winch. Accessory Kits include two shackles, snatch block, and two 1"x 8' (25.4mm x 2.4m) tree trunk protectors. Each kit comes in a black heavyweight nylon soft case. **PN 69222** Kit with black nylon soft case **PN 63351** Black bag only

B) Guide To Winching

The Basic Guide to Winching Techniques is a "must read" booklet that helps you learn the important facts concerning the proper use of your winch. Free download available at www.warn.com. **PN 64660**

C) Snatch Block

Assists in double-lined and angled pulls. Rated to 4,000 lbs. (1,814 kg) capacity and under. **PN 28881**

D) Shackle

Shackle for rigging attachments. Rated to 4,000 lbs. (1,814 kg) capacity and under. **PN 28884**

E) Mini-Rocker Control Switch With Integrated Socket

This kit allows you to plug in a corded remote directly into the mini-rocker switch—no need to drill and install the socket like on existing systems. This allows you to conveniently winch while on or off the vehicle. Kit includes mini-rocker switch with socket, corded remote, and all necessary hardware. **PN 80588**

* Not compatible with PN 64849

F) Tree Trunk Protector

1" x 8' (25mm x 2.4m) load strap, designed to protect a tree trunk from the damage a wire rope might cause. Designed for ATV use only. (Rated to 6,400 lbs.) **PN 28882**

G) Light Weight Rigging Strap

1" x 8' (25mm x 2.4m) For anchoring and lashing to vehicles, trees, and rocks, while protecting your bike and anchor point. (Rated to 2,000 lbs.) **PN 86991**

H) Carrying Case **NEW**

Versatile soft-sided bag for carrying portable winch and rigging. Includes four-point attachment, internal lashing to secure winch, storm flap, and high-visibility reflective piping. **PN 70760**

I) Neoprene Winch Cover

Made of durable, tight-fitting neoprene that resists water and cracking. **PN 71072** For RT/XT 15 Series and 1.5ci winches. Note: XT/RT15 winch cover includes 8' (2.4m) winch rigging strap.

PN 71980 For RT/XT 25, 30 series and 2.5ci, 3.0ci winches.

PN 71975 For RT40, XT40 and 4.0ci winches.

J) Winch Upgrade Kit

Converts the WARN A2000 to the 2500 lb. capacity winch. Comes with the contactor, wiring, and mini-rocker control switch. **PN 63990**

K) Remote Control Upgrade Kit

Everything you need to add the versatile handheld remote control to your RT/XT 25 series or RT/XT 15 series, 2.5ci or 1.5ci winches. Comes with remote control, socket, and wiring. **PN 64259**

L) Replacement Remote Control

PN 64849 Corded remote for WARN ATV and Side X Side winches (remote only).

PN 70756 Corded remote for the WARN SnoWinch (remote only).

PN 74520 Transmitter for Wireless Winch Control System.

PN 80958 For use with Mini-Rocker Control Switch with Integrated Socket

M) Replacement Contactor

Four-post, weather-resistant contactor handles high amps.

PN 76429 For RT/XT40 or 4.0ci winches.

PN 63070 For XT/RT 25, 30 series, 2.5ci or 3.0ci winches (pictured above).

PN 69281 For RT/XT 15 series or 1.5ci winches.

PN 70755 For SnoWinch.

N) Replacement Mini-Rocker Control Switch

Handlebar mounted control. Replacement part for the WARN RT/XT 15, 25, 30 series, 3.0ci, 2.5ci or 1.5ci ATV winches, or the WARN Plow Actuator control. Includes switch and mounting hardware.

PN 64851 For RT/XT 25, 30 series, 3.0ci or 2.5ci winches.

PN 69206 For RT/XT 15 series or 1.5ci winches.

PN 69660 For Plow Actuator.

PN 77944 For Power-Pivot.

WINCH MOUNTING KITS FOR ATVS AND SIDE X SIDES

CAN-AM BRP 800 OUTLANDER



HONDA RANCHER



HONDA RUBICON



KAWASAKI BRUTE FORCE



KAWASAKI PRAIRIE



SUZUKI KING QUAD



SUZUKI OZARK




YAMAHA GRIZZLY



YAMAHA KODIAK



To order the right kit for your ATV or Side X Side: Part numbers are listed on the master application charts at the back of this catalog. Warn Industries is constantly developing new applications. If you can't find your bike listed there, call WARN Customer Service for the latest applications. In North America call 1-800-543-9276. Customers outside of North America can call 1-503-722-1200. Or check our web site: www.warn.com.

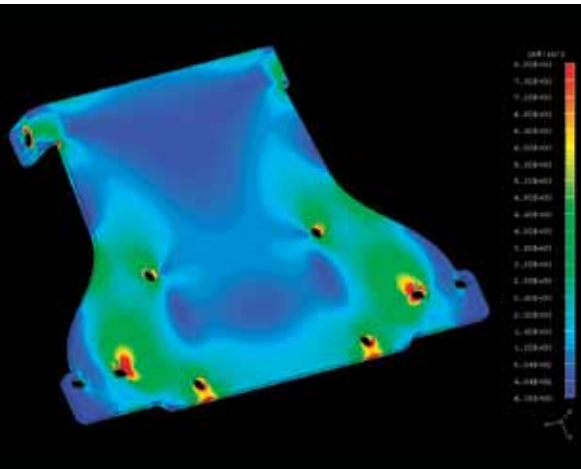

WARN engineers use computer-aided manufacturing and design tools to ensure the WARN mounting kit fits the specific make and model of your vehicle. The mounting kits are then laser cut to the exact dimensions of the vehicle, shaped on a computer controlled press brake, and robotically welded for consistent results.



BUMPERS FOR ATVS AND SIDE X SIDES

For the ultimate in versatility and durability for your Side X Side, WARN offers a variety of bumper styles for popular models. These bumpers have an integrated winch mount, pre-drilled holes for WARN trail lights, and the bumper folds down when needed so you can open the hood. The stout construction and powder-coated wrinkle finish will make these bumpers last for years.

NEW



CAN-AM COMMANDER



ARCTIC CAT PROWLER



YAMAHA RHINO



KAWASAKI TERYX



POLARIS RAZOR



HONDA RANCHER



HONDA RINCON



HONDA RUBICON



KAWASAKI BRUTE FORCE



YAMAHA GRIZZLY



YAMAHA KODIAK



SUZUKI KING QUAD



SUZUKI VINSON



POLARIS SPORTSMAN*

To order the right kit for your ATV or Side X Side: Part numbers are listed on the master application charts at the rear of this catalog. Warn Industries is constantly developing new applications. If you can't find your vehicle listed there, call WARN Customer Service for the latest applications. In North America call 1-800-543-9276. Customers outside of North America can call 1-503-722-1200. Or check our web site: www.warn.com.

* Combination bumper and winch mount.

MULTI-MOUNT SYSTEM for ATVs and Side X Sides



The Multi-Mount winch system is designed to mount to front and rear 1¼" or 2" Class I receivers. These mounting receivers are engineered for specific ATV/Side X Side makes/models and tie into the ATV/Side X Side frame for increased strength and reliability.

HOW TO ORDER

You'll Need Four Items:

- 1) Winch
- 2) Winch Carrier
- 3) Quick Connect Wiring Kit

①



②



③



Choose the set of parts that are right for you:

ATV RT/XT 25 or 30 Winch Mounted to a 1-1/4" Receiver:

- 1. Choose a RT/XT 25 or 30 winch.
- 2. Winch carrier designed to fit 1-1/4" receiver. **PN 70925**
- 3. 50 amp Quick Connect wiring kit for both front and back of vehicle. Includes: 20" winch lead, 48" front battery lead and 96" rear battery lead. **PN 70918**

Side X Side RT/XT40 Winch Mounted to a 2" Receiver:

- 1. Choose a RT/XT40 winch.
- 2. Winch carrier designed to fit 2" receiver. **PN 70919**
- 3. 175 amp Quick Connect wiring kit for both front and back of vehicle. Includes: 20" winch lead, 48" front battery lead, and 120" rear battery lead. **PN 70920**

Side X Side RT/XT30 Winch Mounted to a 2" Receiver:

- 1. Choose a RT/XT30 winch.
- 2. Winch carrier designed to fit 2" receiver. **PN 70917**
- 3. 50 amp Quick-Connect wiring kit for both front and back of vehicle. Includes 20" winch lead, 48" front battery lead, and 120" rear battery lead. **PN 70928**

Side X Side RT/XT30 WINCH MOUNTED TO A 1¼" RECEIVER:

- 1. Choose a RT/XT30 winch.
- 2. Winch carrier designed to fit 1¼" receiver. **PN 70925**
- 3. 50 an Quick-Connect wiring kit for both front and back of vehicle. Includes 20" winch lead, 48" front battery lead, and 120" rear battery lead. **PN 70928**

MULTI-MOUNT ACCESSORIES AND REPLACEMENT PARTS

Power Leads With Quick Connect Plug

50 amp—for use with RT/XT 25 and 30 winches

- PN 70939** (20" winch lead)
- PN 72886** (48" battery lead)
- PN 72888** (96" battery lead)
- PN 70927** (120" battery lead)
- PN 22681** (Quick Connect plugs only)

175 amp—for use with RT/XT40 winch:

- PN 36080** (28" winch lead)
- PN 70926** (48" battery lead)
- PN 26405** (90" battery lead)
- PN 70717** (120" battery lead)
- PN 22680** (Quick Connect plugs only)

Wiring Kit (For RT/XT 25 And 30 Multi-Mount).

Designed for the Multi-Mount owner who wants to wire a second bike. Kit includes front and rear power leads with 50 amp Quick Connect plugs, remote control plug with wiring harness, electrical contactor and Express Install installation wires. **PN 64874**

Steel Receiver Shackle Bracket

Utilizes a 1¼" Class I receiver as a recovery or pulling point.

PN 62041 (Includes bracket, hitch pin and shackle).

PN 28884 (Shackle only) For 2" receivers use PN 29312.



Hitch Cover
For 2" receiver (black rubber). **PN 37509**


Dust Caps For Quick Connect Plugs

PN 60917 for 50 amp plugs.
PN 69847 for 175 amp plugs.

Warn Industries recommends the RT/XT40 winch as the best choice for Side X Side applications.


WARN BODY ARMOR for ATVs and Side X Sides

WARN Body Armor lets you push the envelope and ride with confidence by giving your ATV or Side X Side the ultimate underbody protection. WARN Body Armor is made from brushed aircraft-grade aluminum for excellent durability and great looks. Features include reinforcing beads for the ultimate in strength, recessed hardware to keep nuts and bolts safe and secure, and holes for drainage and servicing access. WARN Body Armor will take your mind off damaging your vehicle and let you focus on riding.

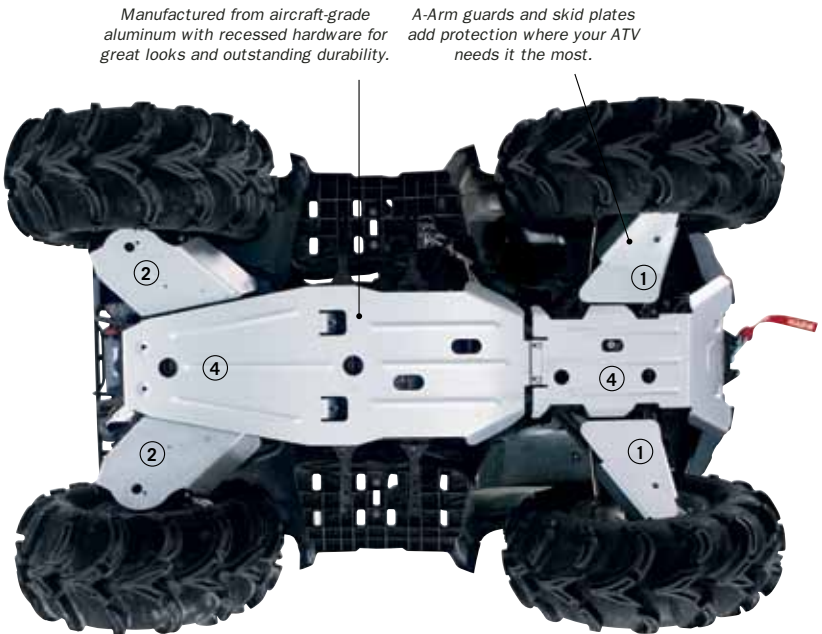

BODY ARMOR COMPONENTS

- ① A-Arm Kit, Front
- ② A-Arm Kit, Rear
- ③ Side Chassis Kit
- ④ Chassis Kit

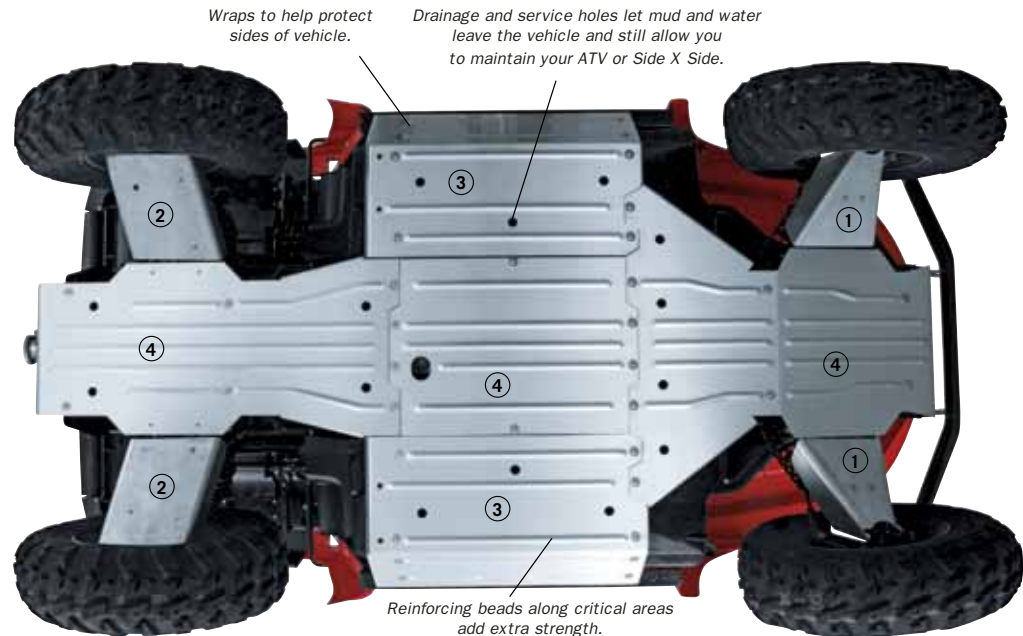

TO ORDER THE RIGHT KIT FOR YOUR ATV OR SIDE X SIDE: Part numbers are listed on the master application chart on pages 119-132, or call WARN Customer Service for the latest applications. In North America call 1-800-543-9276. Customers outside of North America can call 1-503-722-1200. Or check our website: www.warn.com




Extreme Terrain Lights – Ultimate Performance For Where You Ride

You take your vehicles to the limit: Be sure your lights can keep up. WARN® Extreme Terrain (XT) Lights will stand up to the most demanding situations, from traversing trails to crossing continents. They're compact, rugged, and reliable; delivering outstanding world-class performance, and exceptional durability. Available in HID or Halogen models, these lights continue Warn Industries' tradition of offering no-compromise performance lighting and innovative technology.



WXT400-HID Driving Lights


Extreme durability, exceptional performance, and WARN reliability; these are the ultimate 4" HID lamps. At a mere 18 ounces they'll easily mount on bumpers, light bars, or handlebars. Low-amp-draw 40W HID lamps produce an impressive 3,225 lumens, intensely white 5,550k color, and a wide 22° pattern. They stand up to the harshest environments, thanks to stainless steel hardware, forged anodized aluminum housings, impact-resistant glass, and silicone seals. Installation is easy thanks to a compact shape, integrated ballasts, and through-post wiring. **PN 83555**

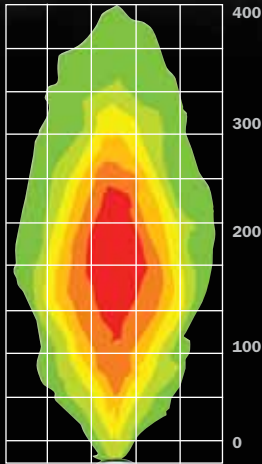

Wide, powerful blast of light—the best way to light the most area.

WXT200-HID Spot Beams

Big HID power, tough little package, and three times brighter than Halogen. Low-amp-draw 30W HID lamps produce an impressive 1,850 lumens, intensely white 5,550k color, and a focused 12° pattern. The ultra compact size, integrated ballast, and through-post wiring mean simple installation. Stainless steel hardware, forged anodized aluminum housings, impact-resistant glass, and silicone seals, mean long lasting durability. These small, extremely versatile HID lights fit a wide variety of applications on or off road, touring or trail. **PN 83552**

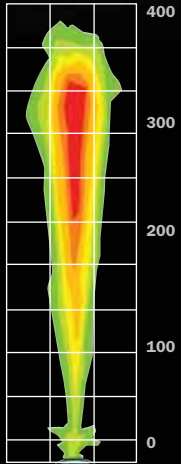


Narrow, intense, and precise for exceptional distance.





WXT200-S Spot Beams

Your extreme halogen spotlights have arrived. Sealed bulbs and welded connectors ensure long life and reliable performance. The 35W bulbs produce 650 lumens and a 12° pattern, offering great range, yet they're easy on your electrical system. With high-grade materials and features, including stainless steel hardware, anodized aluminum housings, impact-resistant lenses, and silicone seals, these lights will stand up to the most intense journeys. **PN 83553**

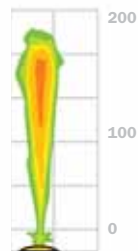


Thin beam of focused light for great straight-line range.



WXT200-F Flood Lights

High performance halogen floodlights for low visibility and narrow trail riding. The 35W bulbs produce 650 lumens and a 36° pattern, illuminating a wide path, yet they're easy on your electrical system. Go to the limits with confidence thanks to features such as welded connections, stainless steel hardware, anodized aluminum housings, impact resistant lenses, and silicone seals. Flood the darkest trails with light and go prepared. **PN 83554**



Wide, low beam spread for use in fog, rain, dust, or snow.



Trail Lights Created specifically for ATVs, the WARN Trail Lights have a lens design that achieves a 110° beam spread from side to side and a 70° vertical (35° up and 35° down), and use 35-watt, battery-saving H3 halogen bulbs with 400 candlepower. The result is a field of illumination that is wider and higher than factory-installed ATV lights so you get the whole view while you're on the move. **PN 62018**



Backup Light

When even the most experienced ATV rider needs to back up, the WARN Back-Up Light provides the illumination needed, thanks to a 35-watt, battery-saving H3 halogen bulb. The light uses a universal mounting bracket and comes with a wiring harness. Designed for ATV use, the light comes with a water-resistant switch and all the necessary mounting hardware. **PN 62017**




Silicone Lens Covers for XT Lights

Enhance and protect your WARN Extreme Terrain lights with these durable, functional silicone lens covers. Available in two colors, these covers are easy to put on/take off for cleaning.

Amber Silicone: Ideal for low-visibility situations, such as fog; amber color is also more visible to oncoming traffic.

PN 83563 (for 2" lights)
PN 84414 (for 4" lights)

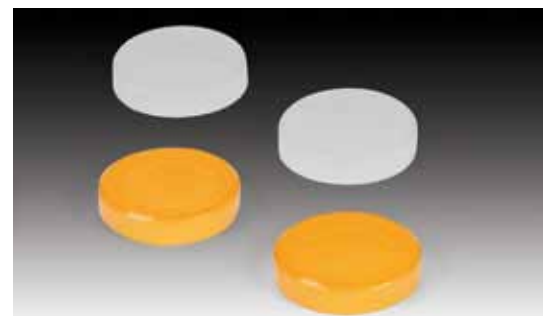

Clear Silicone: Added protection against impact, mud, and dirt, with virtually no light loss.

PN 83562 (for 2" lights)
PN 84413 (for 4" lights)

NEW

Universal Light Bars

A three-piece modular design offers multiple configurations to fit your vehicle look and style. Lightweight aluminum clamps securely attach to bar sizes between 1.5" – 2". Easy access wire tray makes for quick connection. Durable wrinkle powder-coat holds up to the elements.

PN 83970 (High Profile for WARN XT 4" Lighting, up to four lights)
PN 84360 (Low Profile for WARN XT 2" Lighting, up to six lights)



Universal Light Mounts (Tube)

Incredibly versatile, these lightweight aluminum mounts really give you flexibility. Anywhere you need lights, on any vehicle bar or tube. Stainless hardware and powder-coated finish resist elements. For most any post mount light up to 1/2" diameter.

PN 85300 (Fixed, 1.5 – 2")
PN 85338 (Swivel, 1.5 – 2")
PN 85340 (Swivel, .875 – 1.125")
PN 86598 (Universal handlebar switch mount)

NEW



Universal Light Mount (ATV Handlebar Mount)

An easy way to put your lights right on the handlebar. Excellent location for maximizing visibility and minimizing impact damage. Plated fasteners, strong steel construction and powder coat all contribute to long life. Easy multi-angle adjustment to fit your needs.

PN 83972 (Universal — most makes except BRP and Kawasaki)

NEW



Motorcycle Light Mounts **NEW**

Strong steel construction and durable powder-coat finish, these simple easy to install mounts will accommodate up to 1/2" diameter post-mount lights. Solution will vary by model.

PN 85608 BMW F800GS (All)
PN 85609 BMW R1200GS (2008 – Current)
PN 86598 (Universal handlebar switch mount)




TURN TO A PRO THIS PLOW SEASON:
THE WARN ProVantage™ PLOW SYSTEM

The WARN ProVantage ATV plow system was designed from the ground up to be the most versatile, durable, and high-performance plow system on the market. Extensive research, design, and testing make the ProVantage system a best-in-class product that will help you get more done. It's easy to connect. It's heavy-duty. It's engineered to perform. And with a variety of useful, innovative accessories, it's the most complete plow system money can buy.



EXCEPTIONAL CONTROL

The innovative Power-Pivot lets you rotate your plow blade at the push of a button, even under load—no need to get off the vehicle.

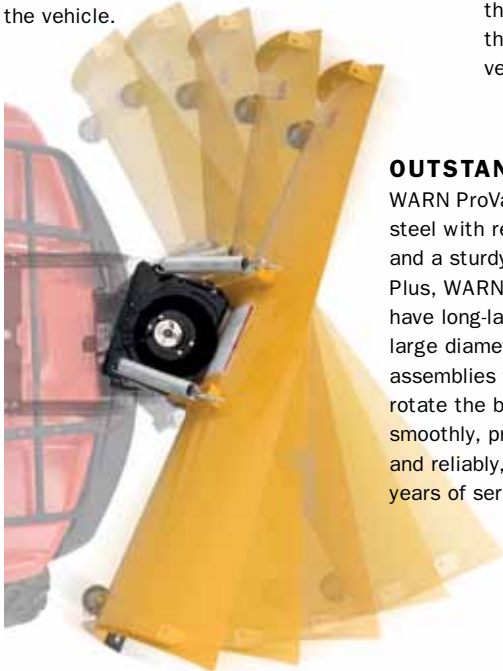

FRONT CONNECTION

For ease of use, choose the ProVantage front-mount system. This allows you to rapidly connect a plow to your vehicle with no more tools and no hassle. Plus, the mount is located at the front of the vehicle—no climbing under the vehicle to attach the plow.



OUTSTANDING DURABILITY

WARN ProVantage plow blades are made from thick-gauge steel with reinforcing ribs, a center cross member, and a sturdy boxed design. Plus, WARN plows have long-lasting, large diameter pivot assemblies that rotate the blade smoothly, precisely, and reliably, for years of service.



BLADE TRIP FEATURE

The plow blade trips forward when striking an immovable object, helping protect the plow assembly from damage. WARN plows lift up high to clear the tallest curbs.



HIGH PERFORMANCE

WARN ProVantage plows feature a special low friction powder-coated finish that helps keep material off the blade. Plus, blade heights are tall so they push more snow. The stable, wide plow bases and durable, extra-large plow skids deliver exceptional performance. The blade can be optimized for varying conditions with an adjustable attack angle and spring tension system.

**HOW TO ORDER
YOUR ATV
PLOW SYSTEM:**

Select the part numbers for: 1) ATV Plow Blade 2) ATV Plow Mounting Kit 3) ATV Plow Base 4) Plow Blade-raising Mechanism

1 CHOOSE YOUR ATV PLOW BLADE

WARN ProVantage Tapered Plow Blade

- Tapered design with aggressively curved profile to move snow or dirt up and away from the surface you're clearing.
- Made from thick 11-gauge steel with extra-heavy ribbing for added rigidity. Boxed design adds further support.
- Special low-friction powder-coated finish helps keep material from sticking to the blade.
- Available in 54" and 60" widths.
- Thick, sturdy wear bar has steep angle of attack for maximum surface scraping.



PN 80954 54" Tapered Blade
PN 80960 60" Tapered Blade

WARN ProVantage Straight Plow Blade

- Made from thick-gauge steel with heavy-duty ribbing and a center cross member for added rigidity. Boxed design adds extra support.
- Special low-friction powder-coated finish helps keep material from sticking to the blade.
- Available in 50", 54" and 60" widths.
- 54" and 60" blades are pre-drilled for accessories.
- 17¾" blade height (for the 54" and 60" blades)
- Thick, sturdy wear bar has steep angle of attack for maximum surface scraping.



PN 78950 50" Blade (14-gauge, no top lip, 16¾" height)
PN 78954 54" Blade **PN 78960** 60" Blade

WARN Standard Plow Blade

- Made from 14-gauge steel with 3/16" outer blade ribs.
- Oversized bushings reduce wear and absorb the shock of plowing.
- Available in 48", 54" and 60" widths.
- 15¾" blade height.


PN 86766 48" Blade
PN 86768 54" Blade
PN 86772 60" Blade



2 PICK YOUR ATV PLOW MOUNTING KIT

ATV Front Plow Mounting Kit

- Rapid connection system: easy-on, easy-off thanks to self-locating pin design.
- Mount is located at the front of the vehicle—no need to crawl under the ATV.
- No need to remove mount during non-plowing seasons; no reduction in ground clearance.

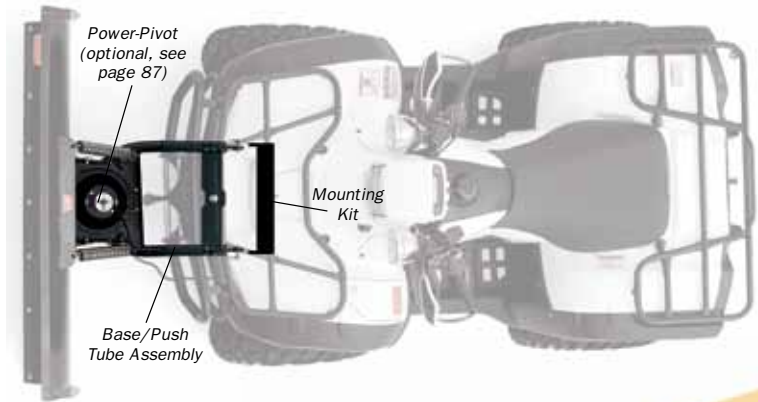

ATV Center Plow Mounting Kit

- Mounting plate remains attached to the ATV and becomes a structural component adding rigidity to the ATV during plowing operations.
- Designed for high ground clearance and quick installation or removal.
- Placement is forward of the foot pegs to avoid any reduction of ground clearance or operating interference.
- Quick release pins attach or detach the plow blade and base assembly in a matter of moments.

NOTE: Part numbers for each kit are engineered to fit a specific ATV make and model. See Powersports application guide for availability of front- and center- plow mounts for your vehicle.


3 ORDER YOUR ATV PLOW BASE

The WARN Plow Base/Push Tube assembly features an extra-wide design for increased stability and durability, a forward trip system, and an interlocked rotating base plate for great strength, outstanding durability, and excellent impact resistance.

PN 92100 For use with front plow mounting kits.

PN 78100 For use with center plow mounting kits.

PN 86528 For use with standard plow blade, with center plow mounting kits.

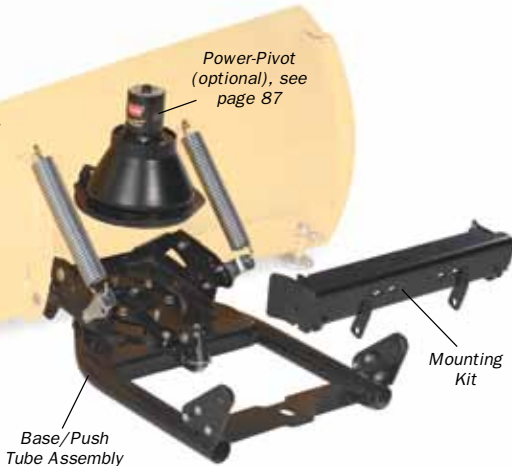

4 PICK YOUR ATV BLADE RAISING MECHANISM

WARN ProVantage Plow Lift

- Effortlessly lifts your plow without needing to use your winch.
- Optimized lift speed for grading control.
- Screw-drive system has plenty of lifting power with low amp draw.
- Includes all hardware, wiring, and all-weather handlebar-mounted switch.
- Compact design; easy to install—will fit all WARN plow systems new or old. **PN 84600**



XT15, 25, or 30 Winch

- An excellent choice if you want a multi-use piece of equipment.



For durability, the WARN synthetic plow lift rope and/or plow roller fairlead is strongly recommended.

WARN PLOW ACCESSORIES



PLOW LIFT ROPE

- 8' section of durable synthetic rope.
- Temporarily replace your wire rope for plow season; saves wear and tear.
- Stands up to repeated, sharp angle pulls used to lift heavy plow blade.

PN 68560



ROLLER FAIRLEAD FOR PLOW LIFTING

Designed for use with winches that raise and lower the ATV plow blade. Larger diameter lower roller reduces wear on rope.

PN 69373 (RT/XT 25 OR 30)
PN 82550 (RT/XT 40)



1 ATV PLOW MARKERS

- 2' high antenna.
- Red rubber tipped for visibility.
- Clearly mark the edge of your plow blade, even in deep snow.
- Easy, bolt-on mounting.

PN 67679

2 SNOW CONTROL FLAP

- Flexible rubber top flap.
- Controls snow kickback and keeps snow on the ground, out of your face.
- Fits all WARN ATV plows (cut to size).

PN 67870 (60")

3 BLADE SIDE WALL

- Controls run off, and gives you scoop-like control of snow, and other materials.
- Lets you gather material before depositing to the side.
- Heavy duty steel construction.

PN 80607

(Straight blades. Can be mounted on either side)

PN 70880 (Tapered blades)

ProVantage Bucket


Turn your ProVantage plow blade into a powerful and versatile bucket loader with this easy to install conversion kit. With a 200 lb. capacity, the ability to move up to five cubic feet of material, and a 60 degree dump angle, you'll be able to get more done in less time. This durable unit is made from sturdy 14 gauge steel with added reinforcement. It's easy to use: The dump release is operable from the driver's seat and, when you lower the bucket, it automatically resets to the "ready" position. A must-have tool for anyone wanting to get the job done.

PN 84133 50" bucket conversion

PN 83133 54" bucket conversion

PN 85133 60" bucket conversion

Not recommended for use with center mount plow. Bucket not compatible with tapered ProVantage plow blade.

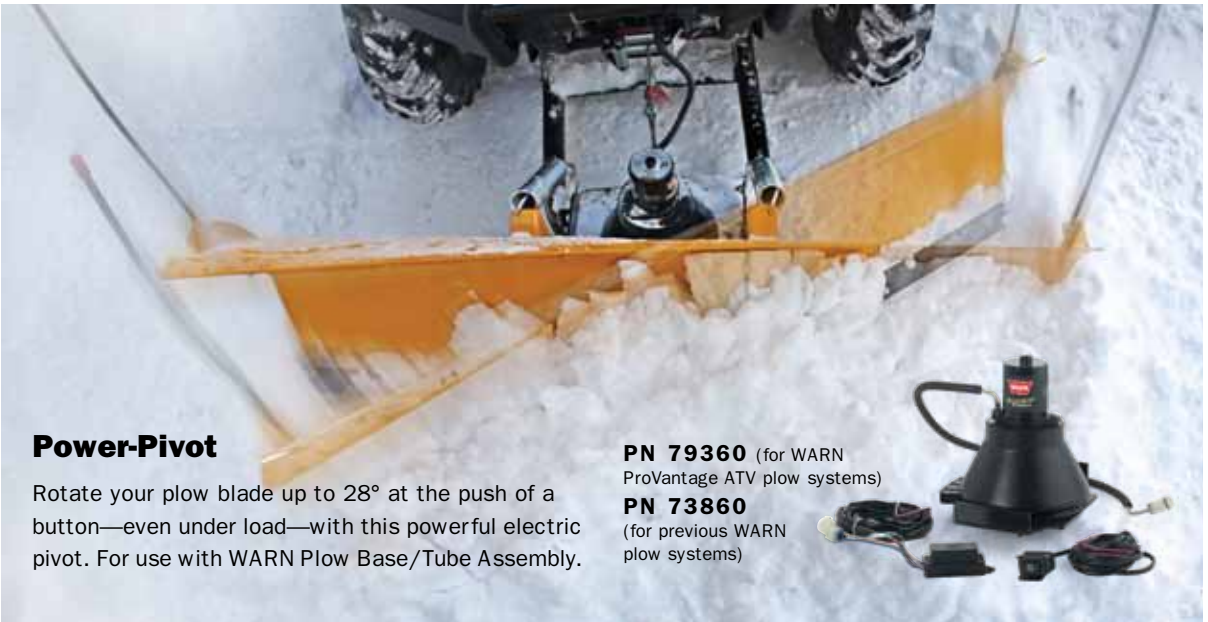

Power-Pivot

Rotate your plow blade up to 28° at the push of a button—even under load—with this powerful electric pivot. For use with WARN Plow Base/Tube Assembly.

PN 79360 (for WARN ProVantage ATV plow systems)

PN 73860

(for previous WARN plow systems)



WARN PLOW ACCESSORIES (continued)

ProVantage Plow System Accessories And Upgrades Increase the durability and performance of your WARN plow system



NEW

HD PLOW MOUNTING

- Increase the durability of your mounting points
- Upgrade mounting points
- Wear-form steel construction
- For front-mount plow only

PN 85243 ATV (Standard Mount) **PN 85244** ATV (Offset Mount)



NEW

PLOW PULLEY

- Provides better control of plow blade by doubling the lifting advantage, slowing blade movement, and repositioning the lift point
- Contributes to longer rope life by reducing load and bend over angle

PN 84526 ATV (Plow Only)

Note: Plow Pulley Kit is not compatible with WARN Power-Pivot or Plow Lift



NEW

PLOW LIMIT CONTROL

- Extends plow system life
- Protects your vehicle from impact and stops "over raised" conditions
- Allows you to fine tune system for a variety of stop positions
- For front-mount plow systems only

PN 85950 ATV (bucket or plow), and UTV (Plow)

PN 88950 Combo Limit Slack Control (plow only)



NEW

PLOW SLACK CONTROL

- Extend the life of your plow system and winch rope
- Eliminates winch overrun when lowering the plow (also corrects cable tangles)

PN 85742 ATV (fits both front and center mount plow systems)

PN 85888 ATV (for use with PN 92100 base tube assembly)


Note: Plow Slack Control kit is not compatible with WARN Power-Pivot



PLASTIC WEAR BAR

- Excellent for use on concrete/brick
- Ultra high molecular weight ¾" thick plastic construction
- Reversible—just flip it when worn
- Saves wear on the plow blade


PN 80860 (50")
PN 67861 (54")
PN 67862 (60")



STEEL WEAR BAR

- Powder-coated black steel construction

PN 39416 (48")
PN 80608 (50")
PN 39415 (54")
PN 62601 (60")



HD STEEL WEAR BAR

- Lasts up to 50% longer than standard steel wear bars
- Wear-form steel construction

PN 84050 (50")
PN 84054 (54")
PN 84060 (60")
PN 85287 (72")



REPLACEMENT PLOW SKIDS

PN 80475 For ProVantage straight and tapered blades (Excludes PN 78950 blade)

PN 38330 For Standard Blade

PN 69212 Premium quick-adjust skid for Cyclone and Standard Blade PN 70948, 70954, 70964, and ProVantage PN 78950

HD PLOW SKIDS

- Outlast standard skids by up to 50%
- Wear-form steel construction

PN 85368





WARN PROVANTAGE SIDE X SIDE PLOW SYSTEM
Rapid Connection, Durable Construction, And Top Quality

Get your Side X Side ready for plowing with the WARN ProVantage Plow System. The system has been engineered from the ground up and extensively tested to give the product years of service, so you and your vehicle can plow season after season.

The ProVantage Side x Side Plow System has the same rapid connection system as the ATV system, but it

uses a big Side X Side specific 72" plow blade to move material. Just add the Side x Side plow base, your plow lift mechanism (either the ProVantage Plow Lift or a WARN XT40 or XT30 winch), pick your accessories of choice, and you're ready to get to work.

72" Straight Plow Blade **PN 79958**
Standard Side X Side Plow Base **PN 79805**



INDUSTRIAL/COMMERCIAL PRODUCTS

WARN INDUSTRIAL: RAW POWER AT EVERY TURN

You name the job, name the industry, and Warn Industries has the product that's up to the task. We're proud to offer such a broad line of dependable electric and hydraulic winches and hoists. From the most powerful electric winch ever made, the Olympus, on down to our smallest hoist, WARN products serve commercial, industrial and severe duty applications. They meet worldwide safety standards in shops and fire and rescue stations everywhere.

Hydraulic Winches, 91-96

Electric Winches, 97-99

Severe Duty Winches, 100-103

Accessories, 103-104

Hoists, 105-107

WARN COMMERCIAL: TIRELESS WORKERS CLOSE AT HAND

When it comes to slightly smaller work duties, Warn Industries continues to deliver a full force of versatile AC-and DC-powered light industrial utility products. With the PullzAll lifting and pulling tool leading the way, WARN products rise to the task – helping workers accomplish more with less.

PullzAll, 109 Utility Winches, 110-111 Accessories, 112




TWIN FALLS IDAHO. What's mandatory equipment on a tow-truck in the rugged Twin Falls area? How about twin WARN Series 15 hydraulic winches?



Hydraulic Planetary Gear Winches

For hydraulic winching applications, no product performs better than a WARN Industrial winch. Powerful hydraulic motors allow for extended duty. Hardened steel, two-stage planetary gear trains deliver efficient and reliable operation plus fast line speeds. Like their electric cousins, these products comply with worldwide quality and safety standards.

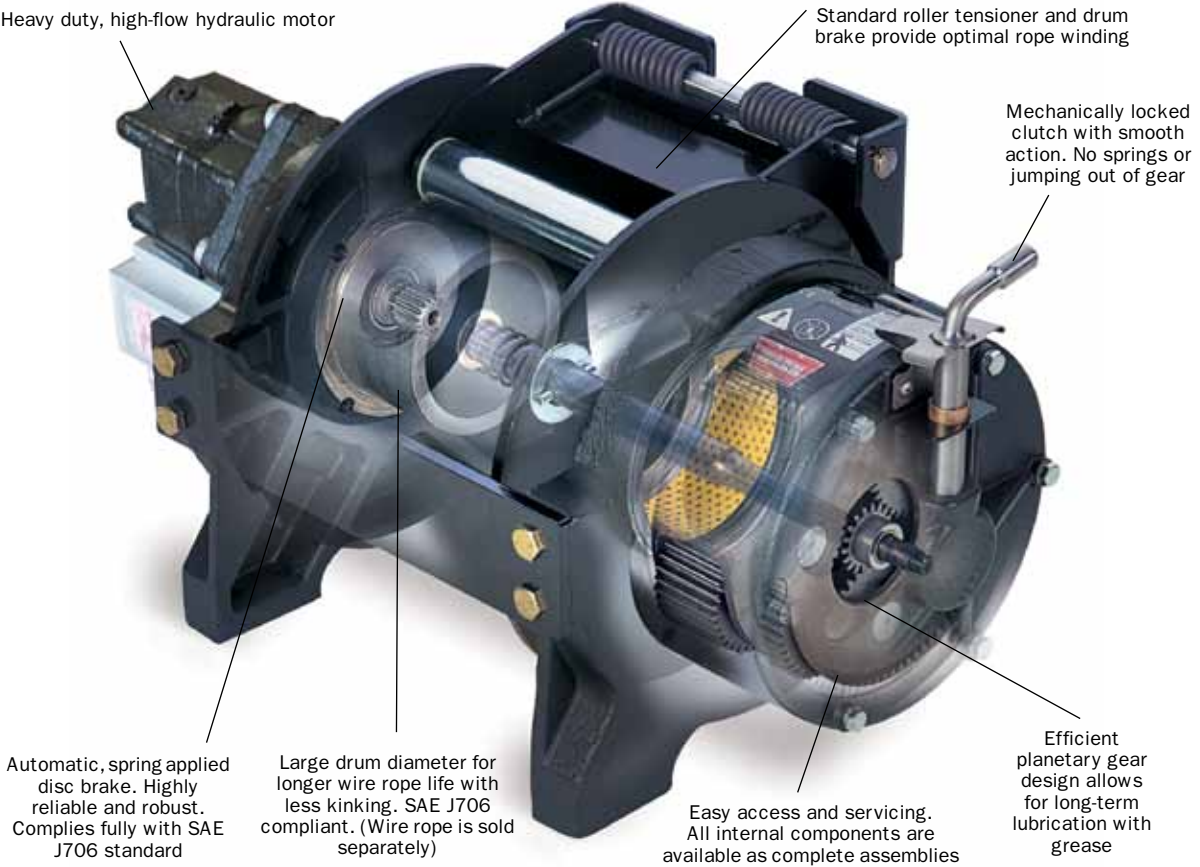



Series 30XL For Heavy Tow, Utility and Trailer Applications

- 12.0 cubic-inch high-performance motor with 30,000 lbf. capacity – great for trailers, roll-back carriers, and severe-duty applications
- Spring-applied disc brake designed to hold the full-rated load
- Hardened aircraft-grade nickel chromoly two-stage planetary geartrain for speed and reliability
- Available in air and manual clutch options
- Available in standard and long-drum versions
- Meets SAE J706 and CE specifications

PN 77880 (Standard Drum, Manual Clutch)
PN 77900 (Standard Drum, Air Clutch)
PN 75990 (Long Drum, Air Clutch)
PN 77890 (Long Drum Manual Clutch)

SPECIFICATIONS:

Maximum pulling force: 30,000 lbf. (13608 kgs)

Maximum wire rope recommended: 5/8" (15.9 mm); 41,200 lbf. (18,688 kgf) minimum breaking strength

Maximum input flow: 20 USGPM (76 L/min)

Maximum input pressure: 3,000 psi (205.8 bar)

Drum barrel diameter: 6.25" (159 mm)

Drum flange diameter: 13.5" (343 mm)

Distance between flanges, standard drum: 8.0" (203 mm); **long drum:** 14.0" (356 mm)

Hydraulic motor: 12.0 cu. in. (197 cc)

Gear ratio: 36.0:1

Approximate shipping weight, standard drum: 322 lbs. (146 kg)

Approximate shipping weight, long drum: 361 lbs. (164 kg)

PERFORMANCE DATA

Drum Layer	Rated Line Pull (lbf)	(kgf)	(kN)	At 15 gpm Line speed		At 20 gpm Line speed	
				(ft/min)	(m/min)	(ft/min)	(m/min)
1	30000	13608	133.4	13	4.0	18	5.4
2	25385	11514	112.9	16	4.8	22	6.7
3	22000	9979	97.9	18	5.5	25	7.6
4	19412	8805	86.3	21	6.4	29	8.8
5	17368	7878	77.3	23	7.0	32	9.8

Drum Layer	5/8" (15.9mm) Standard Drum Capacity (ft.)		5/8" (15.9mm) Long Drum Capacity (ft.)	
	(m)	(m)	(m)	(m)
1	21	6.2	36	10.9
2	45	13.6	78	23.9
3	73	22.2	127	38.8
4	104	31.8	183	55.7
5	140	42.6	245	74.6



Series 20XL Great for Carriers, Trailers, or Severe-Duty Applications

- 8.0 cubic-inch high-performance motor with 20,000 lbf. capacity
- Spring-applied disc brake designed to hold the full-rated load
- Hardened aircraft-grade nickel chromoly two-stage planetary geartrain for speed and reliability
- Available in air and manual clutch options
- Available in standard and long-drum versions
- Meets SAE J706 and CE specifications

PN 74750 (Standard Drum, Air Clutch)
PN 77550 (Standard Drum, Manual Clutch)
PN 77560 (Long Drum, Air Clutch)
PN 77570 (Long Drum, Manual Clutch)

SPECIFICATIONS:

Maximum pulling force: 20,000 lbf. (9072 kgf)

Maximum wire rope recommended: 9/16" (14.3 mm); 33,600 lbf. (15,241 kgf) minimum breaking strength

Maximum input flow: 20 USGPM (76 L/min)

Maximum input pressure: 3,000 psi (205.8 bar)

Drum barrel diameter: 5.75" (146 mm)

Drum flange diameter: 12.25" (311 mm)

Distance between flanges, standard drum: 8.0" (203 mm); **long drum:** 14.0" (356 mm)

Hydraulic motor: 8.0 cu. in. (131 cc)

Gear ratio: 28.5:1

Approximate shipping weight, standard drum: 297 lbs. (135 kg)

Approximate shipping weight, long drum: 322 lbs. (146 kg)

PERFORMANCE DATA

Drum Layer	Rated Line Pull (lbf)	(kgf)	(kN)	At 15 gpm Line speed		At 20 gpm Line speed	
				(ft/min)	(m/min)	(ft/min)	(m/min)
1	20000	9072	89.0	23	7.1	31	9.5
2	16975	7700	75.5	27	8.3	37	11.2
3	14745	6688	65.6	32	9.6	42	12.9
4	13032	5911	58.0	36	10.9	48	14.6
5	11676	5296	51.9	40	12.1	54	16.3

Drum Layer	9/16" (14.3mm) Standard Drum Capacity (ft.)		9/16" (14.3mm) Long Drum Capacity (ft.)	
	(m)	(m)	(m)	(m)
1	21	6.4	37	11.2
2	46	13.9	80	24.3
3	74	22.5	129	39.4
4	106	32.3	186	56.6
5	142	43.2	248	75.7



Series XL-LP Winches For Systems That Operate Below 3000 psi

- Low-pressure design means these winches uses a larger displacement motor to pull full rated load at low psi, making them ideal for hydraulic systems that operate below 3,000 psi.
- Choose from 20XL-LP or 30XL-LP models
- 30XL-LP features a 14.9 cubic-inch high-performance motor with 30,000 lb. capacity – great for heavy-duty applications
- 20XL-LP comes with a 11.9 cubic-inch high-performance motor with 20,000 lb. capacity
- Spring-applied disc brake designed to hold the full-rated load
- Hardened aircraft-grade nickel chromoly two-stage planetary geartrain for speed and reliability
- Standard air clutch with manual clutch option
- Available in short- and long-drum versions
- Meets SAE J706 and CE specifications
- See warn.com for full performance specifications

PN 78970 (20XL-LP, Standard Drum, Air Clutch)
PN 78980 (20XL-LP, Standard Drum, Manual Clutch)
PN 79210 (20XL-LP, Long Drum, Air Clutch)
PN 79220 (20XL-LP, Long Drum, Manual Clutch)
PN 80508 (30XL-LP, Standard Drum, Air Clutch)
PN 80509 (30XL-LP, Standard Drum, Manual Clutch)
PN 80510 (30XL-LP, Long Drum, Air Clutch)
PN 80511 (30XL-LP, Long Drum, Manual Clutch)



Series 30XL 2-Speed Fast No-load Line Retrieval

- Double the speed of the Series XL winch for fast rope retrieval
- Increased productivity improves your bottom line
- 12V solenoid on the winch manifold shifts the winch from high-speed to low-speed
- Choose from standard or low-pressure system design
 - Standard 12.0 cubic-inch motor is great for trailers, roll-back carriers, and severe-duty applications
 - Low pressure 14.9 cubic-inch high-performance motor is perfect for extra heavy-duty applications
- Spring-applied disc brake designed to hold the full-rated load
- Hardened aircraft-grade nickel chromoly two-stage planetary geartrain for speed and reliability
- Meets SAE J706 and CE specifications
- See warn.com for full performance specifications

PN 81617 (Long Drum, Air Clutch, Low-pressure, 2-speed)
PN 82710 (Long Drum, Air Clutch, 2-speed)



Series 18 Hydraulic Pulling Power up to 18,000 lbf.

- For tow, utility and trailer applications
- 7.3 cubic-inch hydraulic motor
- Hardened steel two-stage planetary geartrain with 36:1 reduction provides fast line speed
- Heavy-duty disc brake for dependable operation and plenty of holding power
- Meets SAE J706 and CE standards

PN 74125 (Anti-clockwise)

SPECIFICATIONS:

Maximum pulling force: 18,000 lbf. (8165 kgf)
Maximum wire rope recommended: 1/2" (12.7 mm); 26,600 lbf. (12,091 kgf) minimum breaking strength
Maximum input flow: 15 USGPM (57 L/MIN)
Maximum input pressure: 2400 psi (165 bar)
Drum barrel diameter: 4.0" (102 mm)
Drum flange diameter: 8.24" (209 mm)
Distance between flanges: 9.95" (253 mm)
Hydraulic motor: 7.3 cu. in. (120 cc)
Gear ratio: 36:1

Approximate shipping weight: 82 lbs. (37 kg)

Standards compliance: SAE J706, CE Compliant

PERFORMANCE DATA

Layer	Line Load lbf.(kgf)	Line Speed ft/min. (m/min.)	1/2" (12.7mm) Wire Rope Capacity ft (meters)
1	18000 (8165)	14.9 (4.5)	21 (6.4)
2	14727 (6680)	18.2 (5.5)	46 (14.0)
3	12462 (5652)	21.5 (6.6)	75 (22.9)

PRESSURE DROP – FIRST LAYER OF DRUM

Line Load lbf	kgf	Pressure Drop psi	bar
0	0	162	11.2
3000	1361	400	27.6
6000	2722	663	45.7
9000	4082	930	64.1
12000	5443	1196	82.5
15000	6804	1546	106.6
18000	8165	1816	125.2



Series 15 Pulling Capacity up to 15,000 lbf.

- For tow, utility and trailer applications
- 6.0 cubic-inch motor provides pulling capacity up to 15,000 lbf.
- Hardened steel two-stage planetary geartrain with 36:1 reduction provides fast line speed
- Heavy-duty disc brake for dependable operation and plenty of holding power
- Meets SAE J706 and CE standards

PN 65931 (Anti-clockwise)

SPECIFICATIONS:

Maximum pulling force: 15,000 lbf. (6804 kgf)
Maximum wire rope recommendation: 1/2" (12.7 mm); 26,600 lbf. (12,066 kgf) minimum breaking strength
Maximum input flow: 15 USGPM (57 L/MIN)
Maximum input pressure: 2200 psi (152 bar)
Drum barrel diameter: 4.0" (102 mm)
Drum flange diameter: 8.24" (209 mm)
Distance between flanges: 9.95" (253 mm)
Hydraulic motor: 6.1 cu. in. (100 cc)
Gear ratio: 36:1

Approximate shipping weight: 83 lbs. (37.6 kg)

Standards compliance: SAE J706, CE Compliant

PERFORMANCE DATA

Layer	Line Pull lbf. (kgf)	Line Speed at 15 GPM (57 l/min in) ft/min. (m/min.)	1/2" (12.7mm) Wire Rope Capacity ft (m)
1	15000 (6804)	18.9 (5.8)	21 (6.4)
2	12273 (5567)	23.1 (7.0)	46 (14.0)
3	10385 (4711)	27.3 (8.3)	75 (22.9)

PRESSURE DROP – FIRST LAYER OF DRUM

Line Pull lbf. (kgf)	PSI	BAR
0	362	25
3000 (1361)	662	45.8
6000 (2722)	1003	69.2
9000 (4082)	1379	95.1
12000 (5443)	1790	123.4
15000 (6804)	2200	151.7



Series 12 Perfect for Most Tow, Utility and Trailer Applications

- Pulling capacity up to 12,000 lbf.
- Hardened steel, two-stage planetary geartrain provides faster line speeds
- Heavy-duty automatic disc brake provides dependable operation
- Meets SAE J706 and CE standards

PN 30285 (Anti-clockwise, 4.8)

PN 30286 (Clockwise, 4.8)

PN 32080 (Long Drum Anti-clockwise, 4.8)

PN 32081 (Long Drum Clockwise, 4.8)

SPECIFICATIONS:

Maximum pulling force: 12,000 lbf. (5443 kgf)
Maximum wire rope recommended: 1/2" (12.7 mm); 20,400 lbf. (9253 kgf) minimum breaking strength
Maximum input flow: 15 USGPM (57 L/MIN)
Maximum input pressure: 1950 psi (135 bar)
Drum barrel diameter: 4.0" (102 mm)
Drum flange diameter: 8.24" (209 mm)
Distance between flanges: 9.95" (253 mm)
Hydraulic motor: 4.9 cu. in. (80 cc)
Gear ratio: 36:1

Approximate shipping weight: 86 lb. (39 kg)

Standards compliance: SAE J706, CE Compliant

PERFORMANCE SPECS

Layer	Line Pull lbf. (kgf)	Line Speed at 15 GPM (57 l/min in) ft/min. (m/min.)	7/16" (11.1 mm) Wire Rope Capacity ft (m)
1	12000 (5443)	21.8 (6.6)	23 (7.0)
2	10023 (4546)	26.1 (8.0)	51 (15.5)
3	8606 (3904)	30.4 (9.3)	84 (25.6)
4	7739 (3420)	34.7 (10.6)	121 (36.9)

PRESSURE DROP – FIRST LAYER OF DRUM

Line Pull lbf. (kgf)	PSI	BAR
0	300	21
4000 (1818)	805	56
8000 (3636)	1310	90
12000 (5455)	1820	126



Series 9 Dependable Workhorse with 9,000 lbf. of Pulling Power

- Perfect for tow, utility and trailer applications
- Hardened steel, two-stage planetary geartrain provides faster line speeds
- Heavy-duty automatic disc brake provides dependable operation
- Available in two motor sizes: 4.9 cu. in. and 3.0 cu. in.
- Meets SAE J706 and CE standards

PN 30281 (Anti-clockwise, 4.9)

PN 30282 (Clockwise, 4.9)

PN 30279 (Anti-clockwise, 3.0)

SPECIFICATIONS:

Maximum pulling force: 9,000 lbf. (4082 kgf)
Maximum wire rope recommended: 1/2" (12.7 mm); 15,100 lbf. (6849 kgf) minimum breaking strength
Hydraulic motor: 3.0 cu. in. (50 cc), or 4.9 cu. in. (80 cc)
Maximum input flow, 3.0 cu. in. motor: 15 USGPM (57 L/MIN)
Maximum input flow, 4.9 cu. in. motor: 15 USGPM (57 L/MIN)
Maximum input pressure: 1950 psi (135 bar)
Drum barrel diameter: 4.0" (102 mm)
Drum flange diameter: 8.24" (209 mm)
Distance between flanges: 9.95" (253 mm)
Gear ratio: 27:1

Approximate shipping weight: 80 lbs. (36.3 kg)

Standards compliance: SAE J706, CE Compliant

PERFORMANCE DATA – 4.9 CU IN MOTOR

Layer	Line Pull lb. (kgf)	Line Speed at 15 GPM (57 l/min in) ft/min. (m/min.)	3/8" (9.5 mm) Wire Rope Capacity ft (meters)
1	9000 (4082)	28.5 (8.7)	25 (7.6)
2	7364 (3340)	34.1 (10.4)	54 (16.5)
3	6231 (2826)	39.8 (12.1)	88 (26.8)
4	5400 (2449)	45.4 (13.8)	126 (38.4)

PRESSURE DROP – FIRST LAYER OF DRUM

Line Pull lbf. (kgf)	PSI	BAR
0	358	24.7
3000 (1361)	887	61.1
6000 (2722)	1405	96.9
9000 (4082)	2027	139.8



Series 6 Winching Capacity up to 6,000 lbf.

- Popular winch for tow, utility and trailer applications
- Hardened steel, two-stage planetary geartrain provides faster line speeds
- Rugged dual-cone brake provides dependable control
- Meets SAE J706 and CE standards

PN 33445 (Anti-clockwise)
PN 33446 (Clockwise)

SPECIFICATIONS:

Maximum pulling force: 6,000 lbf. (2722 kgf)

Maximum wire rope recommended: 5/16" (7.9 mm);
10,500 lbf. (4781 kgf) minimum breaking strength

Maximum input flow: 15 USGPM (57 L/MIN)

Maximum input pressure: 1950 psi (135 bar)

Drum barrel diameter: 2.5" (64 mm)

Drum flange diameter: 6.0" (152 mm)

Distance between flanges: 8.92" (227 mm)

Hydraulic Motor: 3.0 cu. in. (50 cc)

Gear ratio: 26:1

Approximate shipping weight: 41 lbs. (19 kg)

Standards compliance: SAE J706, CE Compliant

PERFORMANCE DATA

Layer	Line Pull lbf. (kgf)	Line Speed at 15 GPM (57 l/min in) ft/min. (m/min.)	5/16" (8 mm) Wire Rope Capacity ft (meters)
1	6000 (2727)	32 (9.8)	18 (5.5)
2	4910 (2232)	39 (11.9)	41 (12.5)
3	4150 (1886)	46 (14.1)	68 (20.7)
4	3600 (1636)	53 (16.2)	99 (30.2)

PRESSURE DROP – FIRST LAYER OF DRUM

Line Pull lbf. (kgf)	PSI	BAR
0	343	23.6
2000 (909)	777	53.6
4000 (1818)	1222	84.3
6000 (2722)	1693	116.7



WG9 9,000 lb. Worm Gear Hydraulic Winch

- Cast-iron and aluminum construction with powder-coated finish
- Oil-bath lubricated worm gearbox
- Positive engagement freespool clutch
- 6.32" (161 mm) drum width
- Equipped with a standard 2-bolt SAE A motor flange and 1 inch keyed shaft, allowing the user to select from a range of motor sizes
- Motor not included

90100 (Standard drum with manual clutch)
90500 (Standard drum with remote clutch)
90700 (Standard drum with air clutch)
90300 (Long drum with manual clutch)
90600 (Long drum with remote clutch)
90800 (Long drum with air clutch)

SPECIFICATIONS:

Maximum pulling force: 9,000 lbf (4,082 kgf)

Drum barrel diameter: 3.62 in (92 mm)

Drum flange diameter: 7.48 in (190 mm)

Distance between flanges: 6.32 in (161 mm)

Maximum wire rope diameter: 3/8 in (9.5 mm)

Minimum wire rope breaking strength: 15,100 lbf (6,849 kgf)

Approximate shipping weight: 55.0 lbs. (24.9 kg)

Duty cycle (intermittent per SAE J706 section 6.2): 116 ft. (35m)

Mounting bolt torque: 20 - 25 ft. lbf (27 - 34N m)

Maximum layers of wire rope: 4

Gear reduction: 34:1

Brake type: Automatic locking worm gear

PERFORMANCE DATA based on a 6.0ci motor & 3/8" (9.5 mm) dia. rope

Drum Layer	Line Load			Line Speed 9 GPM		Line Speed 16 GPM		Drum Capacity	
	lbf	kgf	kN	ft/min	m/min	ft/min	m/min	ft	m
1	9000	4082	40.0	10.0	3.0	18.0	5.5	16	4.9
2	7577	3437	33.7	11.8	3.6	21.4	6.5	34	10.4
3	6543	2968	29.1	13.6	4.1	24.8	7.6	56	17.1
4	5757	2611	25.6	15.5	4.7	28.2	8.6	80	24.4

PRESSURE DROP – FIRST LAYER

Line Load lbf kgf	Pressure Drop at 9 GPM		Pressure Drop at 16 GPM	
	psi	BAR	psi	BAR
0	122	8.4	331	22.8
1500	680	290	488	33.6
3000	1361	456	662	45.6
4500	2041	646	830	57.2
6000	2722	843	1012	69.8
7500	3402	1062	1180	81.4
9000	4082	1272	1344	92.6

Note: winch
supplied
without motor



DC Electric Planetary Gear Winches

For electrically powered applications, WARN Industrial offers a comprehensive line of products to meet or exceed your expectations. All electric winches feature heavy-duty 12- or 24-volt series-wound industrial motors and hardened steel three-stage planetary gear trains that provide efficient and reliable operation. Every WARN Industrial planetary winch complies with the world's most stringent standards, including SAE J706 and NFPA.





Series 18 DC Heavy Pulling Power up to 18,000 lbf.

- Dependable high-torque series-wound 24V DC electric motor
 - Weatherproof industrial contactor control pack
 - Rugged 32’ (10 m) industrial remote control
 - Disc brake designed for extended power-out use
 - Thermal overload switch protects motor from overheating
- PN 72005** (24V Motor)

SPECIFICATIONS:

Maximum Pulling Force: 18,000 lbf. (8165 kgf)

Maximum wire rope recommendation: 1/2” (12.7 mm); 26,600 lbf. (12,066 kgf) minimum breaking strength

Drum barrel diameter: 4.0” (102 mm)

Drum flange diameter: 8.24” (209 mm)

Distance between flanges: 9.95” (253 mm)

Contactor: Industrial contactor with 32’ (10 m) heavy-duty remote control

Approximate shipping weight: 103 lbs. (47 kg)

Gear ratio: 315:1

Motor: 24 volt DC series-wound heavy-duty

Standards compliance: SAE J706, NFPA 1901-73, CE Compliant

PERFORMANCE DATA – BY ROPE LAYER

Layer	Line Pull lbf. (kgf)	No Load Line Speed ft. min. (m/min.)	1/2” Wire Rope Capacity ft. (m)
1	18000 (8182)	18.5 (5.6)	20 (6.1)
2	14754 (6706)	22.2 (6.8)	45 (13.7)
3	11827 (5376)	26.7 (8.1)	75 (22.4)

PERFORMANCE DATA – FIRST LAYER

Line Load lbf. (kgf)	Line Speed ft/min (m/min)	Motor Current amps
0 (0)	18.5 (5.6)	58.1
3000 (1361)	11.0 (3.4)	104.0
6000 (2722)	8.6 (2.6)	137.8
9000 (4082)	7.1 (2.2)	169.4
12000 (5443)	6.0 (1.8)	209.7
15000 (6804)	4.9 (1.5)	253.2
18000 (8165)	4.6 (1.4)	278.2



Series 15 DC 12 or 24V Electric Winch Pulls up to 15,000 lbf.

- Dependable high-torque series-wound electric motor, available in 12 or 24V configurations
 - Weatherproof industrial contactor control pack
 - Rugged 32’ (10 m) industrial remote control
 - Disc brake designed for extended power-out use
 - Thermal protection device protects motor from overheating
- PN 66032** (12V Motor)
PN 65932 (24V Motor)

SPECIFICATIONS:

Maximum Pulling Force: 15,000 lbf. (6804 kgf)

Maximum wire rope recommendation: 1/2” (12.7 mm); 26,600 lbf. (12,066 kgf) min. breaking strength

Drum barrel diameter: 4.0” (102 mm)

Drum flange diameter: 8.24” (209 mm)

Distance between flanges: 9.95” (253 mm)

Contactor: Industrial contactor with 32’ (10 m) heavy-duty remote control

Approximate shipping weight: 103 lbs. (47 kg)

Gear ratio: 315:1

Motor: 12 or 24 volt DC series-wound heavy-duty

Standards compliance: SAE J706, NFPA 1901-73, CE Compliant

PERFORMANCE DATA – BY ROPE LAYER

Layer	Line Pull lbf. (kgf)	No Load 12V Line Speed ft/min (m/min)	No Load 24V Line Speed ft/min (m/min)	1/2” Wire Rope Capacity ft. (m)
1	15000 (6804)	16.1 (4.9)	15.4 (4.7)	20 (6.1)
2	12295 (5567)	19.6 (6.0)	18.9 (5.8)	45 (13.7)
3	10417 (4711)	23.2 (7.1)	22.3 (6.8)	75 (22.9)

PERFORMANCE DATA – FIRST LAYER OF DRUM

Line Load lbf. (kgf)	12V Line Speed ft/min (m/min)	24V Line Speed ft/min (m/min)	Motor Current 12V(24V)	Duty Cycle min/10 min 12V(24V)
0	16.1 (4.9)	15.4 (4.7)	111 (49)	6.2 (5.5)
3000 (1361)	13.0 (4.0)	12.6 (3.8)	216 (101)	2.3 (2.1)
6000 (2722)	9.6 (2.9)	9.8 (3.0)	302 (141)	1.4 (1.4)
9000 (4082)	8.0 (2.4)	8.0 (2.4)	390 (181)	1.1 (1.1)
12000 (5443)	6.0 (1.8)	6.5 (2.0)	477 (214)	1.0 (0.9)
15000 (6804)	5.2 (1.6)	5.5 (1.7)	561 (264)	0.8 (0.8)



Series 12 DC Industrial Electric Winch Pulls up to 12,000 lbf.

- Dependable high-torque series-wound electric motor, available in 12 or 24V configurations
 - SAE J706-compliant disc brake designed for extended power-out use
 - Rugged 32’ (10 m) industrial remote control
 - Weatherproof industrial contactor control pack
 - Thermal protection device protects motor from overheating
- PN 30289** (12V Motor)
PN 30290 (24V Motor)

SPECIFICATIONS:

Maximum Pulling Force: 12,000 lbf. (5443 kgf)

Maximum wire rope recommended: 1/2” (12.7 mm); 20,400 lbf. (9,253 kgf) minimum breaking strength

Drum barrel diameter: 4.0” (102 mm)

Drum flange diameter: 8.24” (209 mm)

Distance between flanges: 9.95” (253 mm)

Contactor: Industrial contactor with 32’ (10 m) heavy-duty remote control

Gear ratio: (12 volt model) 315:1, (24 volt model) 261:1

Motor: 12 or 24 volt DC series-wound heavy-duty

Approximate shipping weight: 103 lbs. (47 kg)

Standards compliance: SAE J706, CE Compliant, NFPA 1901-73

PERFORMANCE DATA – BY ROPE LAYER

Layer	Line Pull lbf. (kgf)	No Load 12V Line Speed ft/min (m/min)	No Load 24V Line Speed ft/min (m/min)	7/16” Wire Rope Capacity ft. (m)
1	12000 (5443)	17.7 (5.4)	18.1 (5.5)	23 (7.0)
2	10024 (4547)	21.1 (6.4)	21.6 (6.6)	51 (15.5)
3	8606 (3904)	24.6 (7.5)	25.2 (7.7)	84 (25.6)
4	7540 (3420)	28.1 (8.6)	28.7 (8.7)	121 (36.9)

PERFORMANCE DATA – FIRST LAYER OF DRUM

Line Load lbf. (kgf)	12V Line Speed ft/min (m/min)	24V Line Speed ft/min (m/min)	Motor Current 12V(24V)	Duty Cycle min/10 min 12V(24V)
0	17.7 (5.4)	18.1 (5.5)	105 (49)	3.8 (5.6)
4000 (1814)	7.7 (2.3)	12.2 (3.7)	219 (125)	1.5 (1.6)
8000 (3629)	4.7 (1.4)	9.3 (2.8)	319 (189)	1.0 (1.0)
12000 (5443)	2.9 (0.9)	7.0 (2.1)	419 (245)	0.7 (0.8)



Series 9 DC Industrial Grade Winch Pulls up to 9,000 lbf.

- Dependable high-torque series-wound electric motor, available in 12 or 24V configurations
 - SAE J706-compliant disc brake designed for extended power-out use
 - Rugged 32’ (10 m) industrial remote control
 - Higher gear ratio for fastest line speed
 - Weatherproof industrial contactor control pack
 - Thermal protection device protects motor from overheating
- PN 30283** (12V Motor)
PN 30284 (24V Motor)

SPECIFICATIONS:

Maximum Pulling Force: 9,000 lbf. (4082 kgf)

Maximum wire rope recommendation: 1/2” (12.7 mm); 15,100 lbf. (6,849 kgf) minimum breaking strength

Drum barrel diameter: 4.0” (102 mm)

Drum flange diameter: 8.24” (209 mm)

Distance between flanges: 9.95” (253 mm)

Contactor: Industrial contactor with 32’ (10 m) heavy-duty remote control

Gear ratio: 199:1

Motor: 12 or 24 volt DC series-wound heavy-duty

Approximate shipping weight: 95 lbs. (43 kg)

Standards compliance: SAE J706, CE Compliant, NFPA 1901-73

PERFORMANCE DATA – BY ROPE LAYER

Layer	Line Pull lbf. (kgf)	No Load 12V Line Speed ft/min (m/min)	No Load 24V Line Speed ft/min (m/min)	3/8” Wire Rope Capacity ft. (m)
1	9000 (4082)	26 (7.9)	31.3 (9.5)	25 (7.6)
2	7518 (3410)	31.1 (9.5)	37.4 (11.4)	54 (16.5)
3	6455 (2928)	36.3 (11.1)	43.6 (13.3)	88 (26.8)
4	5655 (2565)	41.4 (12.6)	49.8 (15.1)	126 (38.4)

PERFORMANCE DATA – FIRST LAYER OF DRUM

Line Load lbf. (kgf)	12V Line Speed ft/min (m/min)	24V Line Speed ft/min (m/min)	Motor Current 12V(24V)	Duty Cycle min/10 min 12V(24V)
0	26(7.9)	31.3 (9.5)	101 (54)	4.1 (4.8)
3000(1361)	12.8 (3.9)	15.3 (4.7)	233 (120)	1.4 (1.7)
6000(2722)	5.5 (1.7)	10.4 (3.2)	363 (185)	0.9 (1.0)
9000(4082)	2.9 (0.9)	8.1 (2.5)	486 (238)	0.6 (0.8)





Severe Duty Winches

Proven in the harshest situations imaginable, WARN Severe Duty winches are built to stringent standards. Many WARN Severe Duty winches feature contactors and motors that are potted in a two-part silicone compound that provides total protection from water intrusion and allows dependable operation in up to six feet of water. A high grade, chemical resistant finish offers the ultimate in corrosion resistance while a powerful series wound motor with thermal protection and overload interrupt switch provides unmatched performance and durability for today's customer.

AXIAL FLUX PERMANENT MAGNET MOTOR
New generation state-of-the-art motor is efficient and compact—delivering massive pulling power and extended duty cycles (nearing hydraulic performance), while drawing up to a third less current compared to existing electric winches

ELECTROMAGNETIC BRAKE
Multi-plate disc mechanical brake and dynamic motor braking work together to control and hold the load. Exterior placement delivers superior heat dissipation

PLANETARY GEAR TRAIN
Newly-engineered design features carriers that are manufactured from solid aluminum alloy, delivering improved efficiency and smooth, reliable, maintenance-free operation

OVERLOAD INTERRUPT
OLI Module limits pulling power in overload/low power situations

CORROSION RESISTANT FINISH
Options include CARC, anodizing, or powder-coating

ROPE OPTIONS
Available with either wire rope or lightweight, easy-to-handle synthetic rope

ALUMINUM ALLOY CONSTRUCTION
Major components are built with lightweight and corrosion resistant material. Overall weight is 65% less than comparable hydraulic winch systems

EXTREME SEALING
Sealing at motor and gear housing joints keeps water and contaminants out. Potted contactor assembly provides total protection from water infiltration



Olympus 25 with long drum and severe-duty synthetic rope

Olympus 25 The World's Most Powerful and Efficient Electric Winch.

Lightweight, compact, efficient and powerful. With an extreme duty cycle that rivals hydraulic performance.

- The largest pulling capacity of any electric winch available: 25,000 lbf. (11,340 kgf)
- Axial flux permanent magnet motor provides amazing power and duty cycle—near hydraulic performance
- Weighs 65% less than comparative hydraulic winch systems—better fuel economy and more payload
- Wire rope or lightweight, easy-to-handle synthetic rope is included
- The ultimate vehicle recovery winch
- Configurations available to retrofit existing vehicle applications

PN 84674 (Long Drum/Synthetic Rope) Olympus 25
PN 83616 (Short Drum/Wire Rope) Olympus 22



Olympus 22 with short drum and wire rope

OLYMPUS 25
PERFORMANCE DATA – FIRST LAYER

RATED LINE PULL			LINE SPEED		MOTOR CURRENT
lbf.	kgf	kN	ft/min	m/min	amps
0	0	0.0	7.80	2.4	9
5000	2268	22.2	7.33	2.2	77
10000	4536	44.5	6.91	2.1	121
15000	6804	66.7	6.48	2.0	165
20000	9072	89.0	6.05	1.8	208
25000	11340	111.2	5.63	1.7	252

SPECIFICATIONS:

Maximum pulling force: 25,000 lbf. (11,340 kgf) Olympus 25, 22,000 lbf. (9,980 kgf) Olympus 22

Maximum wire rope recommended: 1/2" (12.7 mm); 33,600 lbf (15,241 kgf) minimum breaking strength

Maximum synthetic rope recommended: 5/8" (16 mm); 40,000 lbf (18,144 kgf) minimum breaking strength

Drum barrel diameter: 5.0" (127 mm)

Drum flange diameter: 8.0" (203 mm) (wire), 9.0" (229 mm) (synthetic)

Distance between flanges: 9.0" (229 mm) (wire), 12.0" (305 mm) (synthetic)

Contactor: Industrial contactor

Control: Heavy-duty remote control with 32' (10 m) lead

Gear ratio: 216:1

Motor: 24 volt DC permanent magnet axial flux 5.6 hp (4.2 kW)

Approximate shipping weight (with rope): 156 lbs. (71 kg) (short drum wire), 146 lbs. (66 kg) (long drum synthetic)

Standards compliance: NFPA 1901 (PN 84674 only)





See the WARN website for performance data.

Severe Duty 18 24V Electric Self-Recovery Winch

- 24 volt DC electric-powered winch is rated to pull 18,000 lbf. (8,165 kgf) pull rating
- Waterproof construction
 - Silicone sealing at all motor and gear housing joints
 - Double lip, spring sealing at drum supports
 - Contactor and motor are potted in a two-part silicone compound and sealed
- Superior corrosion resistance:
 - E-coat, CARC coating provides maximum chemical resistance
 - Stainless steel fasteners
- 4.5hp high-torque series-wound motor
- 3-stage planetary geartrain
- Includes thermal protection switch and optional Overload Interrupt module
- Automatic heavy-duty brake
- Industrial contactor and remote control
- Available with EIPS wire rope – see website for specs

Part numbers: Contact Warn Industries customer service for application assistance

SPECIFICATIONS:

Maximum pulling force: 18,000 lbf. (8165 kgf)
Maximum wire rope recommendation: 1/2" (2.7 mm)
Drum barrel diameter: 4" (101.6 mm)
Drum flange diameter: 8.24 inches (209.3 mm)
Distance between flanges: varies by model – see web for full specs
Contactor: Industrial
Gear ratio: 315:1
Approximate shipping weight (with mounting plate and fairlead): 175 lbs. (79 kg)

Standards compliance: MIL-STD-339, sec 800, 3.2.2, 3.2.3; MIL-STD-1184, Type III, Class 1, test method 100 - waterproofing; SAE J706; CE Machinery Directive 98/37/EEC and 2006/42/EC; CE EMC Directive 2004/108/EC; ASTM B117- 408 hours, Corrosion rating per ASTM D1654



Severe Duty 12 Deep Fording Built to Stringent Standards

- 24V DC electric-powered
- Waterproof construction:
 - Silicone sealing at all motor and gear housing joints
 - Double lip, spring sealing at drum supports
 - Contactor and motor are sealed and potted in a two-part silicone compound
- Superior corrosion resistance:
 - E-coat and CARC coating provide maximum chemical resistance
 - Stainless steel fasteners
- 4.5hp high-torque series-wound motor
- 3-stage planetary geartrain
- Includes thermal protection switch and Overload Interrupt module
- Automatic heavy-duty brake
- Industrial contactor and remote control (sold separately)
- Includes 75' of 7/16" EIPS rope (22.8 m of 11 mm), hook and hawse fairlead

Part numbers: Contact Warn Industries customer service for application assistance

SPECIFICATIONS:

Maximum pulling force: 12,000 lbf. (5,443 kgf)
Comes with 75' of 7/16" rope (fairlead not included)
Drum barrel diameter: 4.0" (102 mm)
Drum flange diameter: 8.24" (209 mm)
Distance between flanges: 6.45" (164 mm)
Industrial contactor with 14' (4.5 m) heavy-duty remote control
Gear ratio: 315:1
Approximate shipping weight: 150 lbs. (68 kg)

Standards compliance: MIL-STD-339, sec 800, 3.2.2, 3.2.3; MIL-STD-1184, Type III, Class 1, test method 100 - waterproofing; SAE J706; CE Machinery Directive 98/37/EEC and 2006/42/EC; CE EMC Directive 2004/108/EC; ASTM B117- 408 hours, Corrosion rating per ASTM D1654

PERFORMANCE DATA – FIRST LAYER OF DRUM

Line Load lbf. (kgf)	24V Line Speed ft/min (m/min)	Motor Current 24V	Duty Cycle min/10 min
0	18.1 (5.5)	49	5.6
4000 (1814)	12.2 (3.7)	125	1.6
8000 (3629)	9.3 (2.8)	189	1.0
12000 (5443)	7.0 (2.1)	245	0.8

Severe Duty 12 Deep Fording Winch and Mounting Kit for AM General H1 24V

- 24V DC electric powered 12,000 lbf. (5,440 kgf) capacity winch is electronically limited to pull 9,000 lbf. (4,091 kgf)
 - Waterproof construction:
 - Silicone sealing at all motor and gear housing joints
 - Double lip, spring sealing at drum supports
 - Contactor and motor are sealed and potted in a two-part silicone compound
 - Superior corrosion resistance:
 - E-coat and CARC coating provide maximum chemical resistance
 - Stainless steel fasteners
 - 4.5 hp (1.87kw) series-wound motor
 - 3-stage planetary geartrain
 - Includes thermal protection switch and Overload Interrupt (OLI) module
 - Automatic heavy-duty brake
 - Includes 75' of 7/16" EIPS rope (22.8 m of 11 mm), hook, mounting plate and hawse fairlead
 - Industrial contactor and remote control
- PN 64402** (24V Motor)



SPECIFICATIONS:

Maximum Pulling Force: 12,000 lbf. (5,440 kgf)
Drum barrel diameter: 4.0" (102 mm)
Drum flange diameter: 8.24" (209 mm)
Distance between flanges: 6.45" (164 mm)
Contactor: Industrial contactor with 14' (4.5 m) heavy-duty remote control
Motor: 24 volt DC series-wound 4.5 hp (1.87 kw)
Gear ratio: 315:1
Approximate shipping weight: 150 lbs. (68 kg)

See the WARN website for performance data.

Standards compliance: MIL-STD-339, sec 800, 3.2.2, 3.2.3; MIL-STD-1184, Type III, Class 1, test method 100 - waterproofing; SAE J706; CE Machinery Directive 98/37/EEC and 2006/42/EC; CE EMC Directive 2004/108/EC; ASTM B117- 408 hours, Corrosion rating per ASTM D1654

Industrial Winch Accessories



Industrial Snatch Block

- Doubles the pulling power of your winch
- Aids in sharp angle and three-point rigging

PN 15640 24,000 lbs. (10,886 kg)
PN 1063490 33,000 lbs. (14,968 kg)
PN 78387 36,000 lbs. (16,329 kg)
PN 80858 60,000 lbs. (27,215 kg)



Recovery Strap

- Absorbs the shock of heavy pulls, while the elastic rebound energy aids in quick recovery
- PN 11392** 3" x 30' (8 cm x 9 m)



For DC Electric Industrial Winches, CE, with E-stop

For DC Electric Industrial Winches

For DC Electric Industrial Winches, Severe Duty

Winch Remote Controls

- Weatherproof industrial-quality corded remote controls
 - Designed to meet stringent performance standards
- PN 34462** For DC Electric Industrial Winches, with 12'(3.65 m) lead
- PN 31506** For DC Electric Industrial Winches, with 33'(10.05 m) lead
- PN 65014** For DC Electric Industrial Winches, with 27'(8.22 m) lead, CE, with E-stop (not EN60204 compliant)
- PN 63680** For DC Electric Industrial Winches, with 12'(3.65 m) lead, CE, with E-stop (not EN60204 compliant)
- PN 77671** For DC Electric Severe Duty Winches, with 12'(3.65 m) lead
- PN 85394** For DC Electric Severe Duty Winches, with 33'(10.05 m) lead



Wire Rope Tension Kit

- Prevents wire rope tangling when freespooling
- Assists in uniform wire rope spooling
- Available in two models: Heavy Duty and Standard

PN 31282 12.5" wide drum
PN 31149 10" wide drum
PN 31150 8" wide drum
PN 34373 Series 6

Industrial Winch Accessories



Severe Duty Synthetic Winch Rope

- Exclusively developed for Severe Duty winching applications
- 100' (30 m) x 5/8" (16 mm) diameter
- 47,500 lbf (21,546 kgf) minimum breaking strength
- Patented 6-strand Dyneema construction for the ultimate balance of strength, durability and weight
- Impervious Dyneema cover provides protection against the elements
- Easier handling, coiling, and rigging means less time for vehicle recovery
- Reinforced welded steel tube thimble and braided eyelets for maximum capacity

PN 86962 (for Olympus 25 winches)

Overload Interrupt (OLI)

- Digital technology designed to limit a winch's maximum pulling power in the case of overload or low-voltage situations
- LED display provides motor current feedback
- Sealed against damage caused by moisture and chemicals
- For use with all WARN Industrial electric winches, 12- and 24-volt compatible
- Factory programmed to customer specifications. Can be reprogrammed to a new set point in the field by trained factory representatives

Part numbers:
Contact Warn Industries Customer Service for application assistance



Industrial Roller Fairleads

- High-strength steel rollers
- Permanently lubed bronze bushings provide long roller life and smooth cable retrieval
- Heavy-duty welded frame
- Available in chrome, painted or CARC coated
- Available for all industrial winches

PN 29844 Black, Series Winch, 6.5" drum
PN 24335 Black, Series Winch, 8" drum
PN 24336 Black, Series Winch, 10" drum
PN 30860 Chrome, Series Winch, 8" drum
PN 30859 Chrome, Series Winch, 10" drum
PN 77532 Black, Series XL Winch, 8" drum
PN 77869 Black, Series XL Winch, 14" drum



Industrial Winch Accessory Kit

- Snatch block, choker chain and shackle
- Winching gloves
- Tree trunk protector and recovery strap
- Nylon camouflaged soft case
- Rated for winches up to 12,000 lbf.

PN 29460



Remote Air Clutch

- Operating range of 50-250 psi (3.50-17.25)
- Single acting air clutch with positive spring engagement
- Easily installed, compact size
- For all Series winches

PN 71370

Remote Clutch Kit, Mechanical

- Allows for easy engagement and disengagement of the clutch for winches mounted in hard-to-reach areas
- Threaded rod shown in photo is not included in kit 38316

PN 38316 for Series winches
PN 24335 for WG9 winches




Wire Rope and Hook Assemblies

- EIPS industrial-grade wire rope assemblies allow for maximum versatility
- Standard steel hook, hook latch, and metal protection thimble included
- See WARN website for part numbers



Planetary Gear Hoists

WARN Industrial hoists combine the performance of heavy duty motors with hardened steel planetary geartrains to provide optimum power in lifting operations. DC electric hoists are available with 12V and 24V motors while hydraulic hoists work with all hydraulic systems. All WARN hoists comply with the world's most stringent standards.

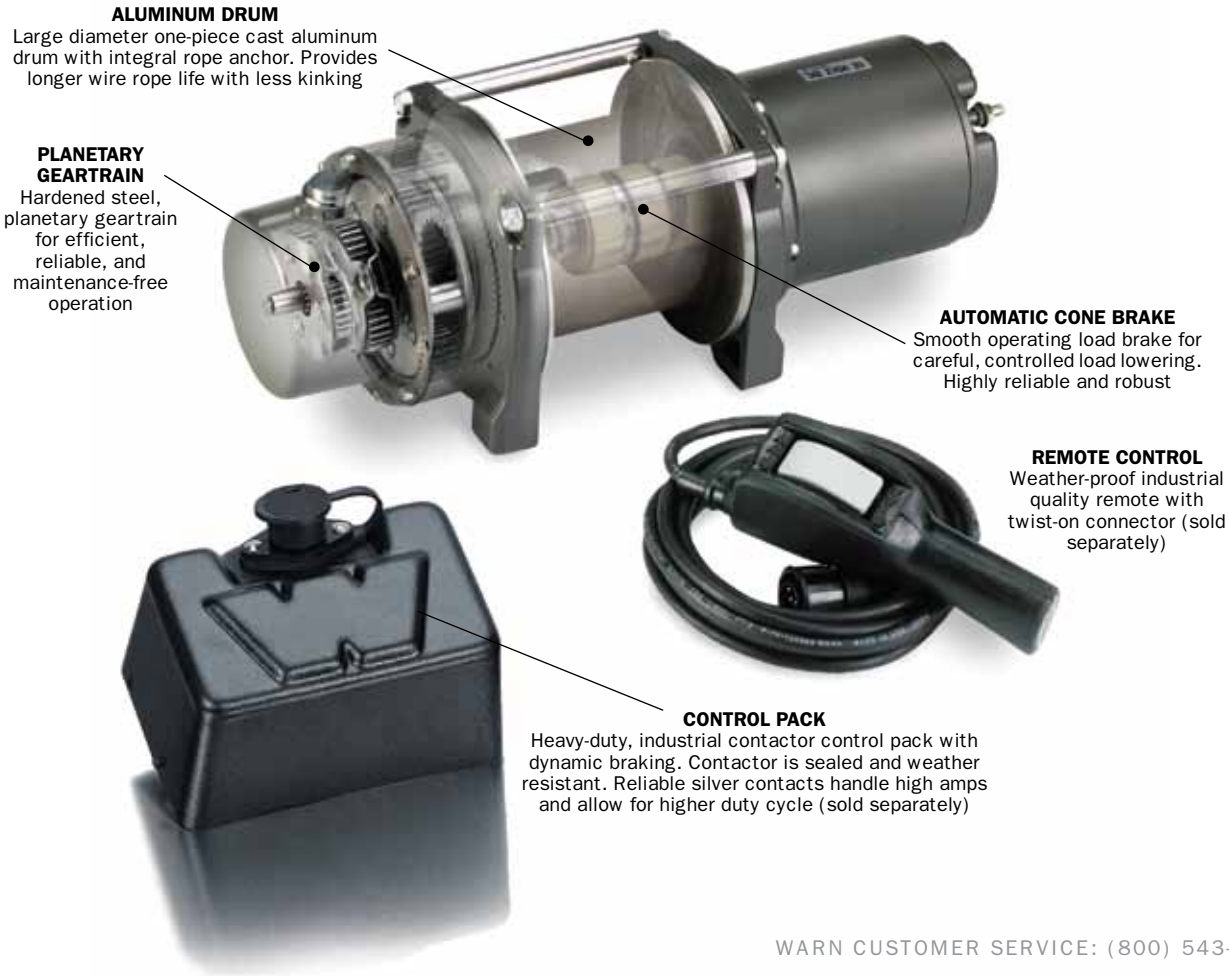

ALUMINUM DRUM

Large diameter one-piece cast aluminum drum with integral rope anchor. Provides longer wire rope life with less kinking

PLANETARY GEARTRAIN

Hardened steel, planetary geartrain for efficient, reliable, and maintenance-free operation

AUTOMATIC CONE BRAKE

Smooth operating load brake for careful, controlled load lowering. Highly reliable and robust

REMOTE CONTROL

Weather-proof industrial quality remote with twist-on connector (sold separately)

CONTROL PACK

Heavy-duty, industrial contactor control pack with dynamic braking. Contactor is sealed and weather resistant. Reliable silver contacts handle high amps and allow for higher duty cycle (sold separately)



DC3000
DC Electric Hoist Lifts up to 3,000 lbf.

- Powerful series-wound DC motor with robust sealing
- Proven 3-stage planetary geartrain
- Permanent grease lubrication
- Automatic disk brake that holds full rated load
- Large frame with a cast aluminum drum for plenty of wire rope capacity
- Controls and remote sold separately
- See warn.com for complete specifications

PN 85251 (12V), **PN 63897** (12V CCW), **PN 85252** (24V)



DC1600
DC Electric Hoist Lifts up to 1,600 lbf.

- Powerful permanent-magnet DC motor with robust sealing
- Proven 3-stage planetary geartrain
- Permanent grease lubrication
- Automatic cone brake that holds full rated load
- Large frame with a cast aluminum drum for plenty of wire rope capacity
- Controls and remote sold separately
- See warn.com for complete specifications

PN 33503 (12V), **PN 85159** (24V)



DC1000
DC Electric Hoist Lifts up to 1,000 lbf.

- Powerful permanent-magnet DC motor with robust sealing
- Proven 3-stage planetary geartrain
- Permanent grease lubrication
- Automatic disk brake that holds full rated load
- Compact frame comes standard with a steel mounting plate and hardware for quick and easy installation
- Controls and remote sold separately
- See warn.com for complete specifications

PN 82469 (12V)
PN 84350 (12V Short Drum)
PN 82470 (24V)



DC2000 LF
DC Electric Hoist Lifts up to 2,000 lbf.

- Powerful permanent-magnet DC motor with robust sealing
- Proven 3-stage planetary geartrain
- Permanent grease lubrication
- Automatic cone brake that holds full rated load
- Large frame with a cast aluminum drum for plenty of wire rope capacity
- Controls and remote sold separately
- See warn.com for complete specifications

PN 70469 (12V), **PN 85160** (24V)



DC1200
Midsize Hoist Lifts up to 1,200 lbf.

- Powerful permanent-magnet DC motor with robust sealing
- Proven 3-stage planetary geartrain
- Permanent grease lubrication
- Automatic cone brake that holds full rated load
- Compact midsize frame with integrated tie bars for easy installation
- Controls and remote sold separately
- See warn.com for complete specifications

PN 64254 (12V), **PN 85250** (24V)



DC800
Compact Hoist Lifts up to 800 lbf.

- Powerful permanent-magnet DC motor with robust sealing
- Proven 3-stage planetary geartrain
- Permanent grease lubrication
- Automatic disk brake that holds full rated load
- Compact frame comes standard with a steel mounting plate and hardware for quick and easy installation
- Controls and remote sold separately
- See warn.com for complete specifications

PN 82467 (12V)
PN 82468 (24V)



HY3000
Hydraulic Hoist Lifts up to 3,000 lbf.

- Large frame with a cast aluminum drum for plenty of wire rope capacity
- Powerful hydraulic motor with robust sealing
- Proven 2-stage planetary geartrain
- Permanent grease lubrication
- Automatic disk brake that holds full rated load
- See warn.com for complete specifications

PN 36949
PN 36948 (CCW)



HY2000
Compact Hydraulic Hoist Lifts up to 2,000 lbf.

- Compact midsize frame with integrated tie bars for easy install
- Powerful hydraulic motor with robust sealing
- Proven 2-stage planetary geartrain
- Permanent grease lubrication
- Automatic cone brake that holds full rated load
- See warn.com for complete specifications

PN 68032

Control Pack and Remote Control for the DC Powered Hoist

Industrial control packs and remote controls are sold separately from WARN hoist units.

Here's how to order the correct control pack and remote control that fits your DC-powered hoist:

1. Locate your hoist model in the chart below.
2. Order the control pack and remote control to work with your hoist. Control pack and remote are each sold separately.



**REMOTE CONTROLS
(All WARN Hoist Models):**

Industrial Remote, Heavy Duty, 12 foot	34462
Industrial Remote, Heavy Duty, 10 meter	31506
Industrial Remote, Heavy Duty w/ E-stop, 12 foot	63680

CONTROL PACKS:

Hoist Model	Motor Type	Control Pack	Contactors Only (with universal bracket)	Contactors Only (with bracket for WARN cover)	Contactors Cover Only (with remote plug)	Contactors Cover Only (w/o remote plug)
DC800-12V	Permanent Magnet	63926	83321	N/A	36648	35169
DC800-24V	Permanent Magnet	84710	83322	N/A	36648	35169
DC1000-12V	Permanent Magnet	63926	83321	N/A	36648	35169
DC1000-24V	Permanent Magnet	84710	83322	N/A	36648	35169
DC1200-CF-12V	Permanent Magnet	63926	83321	N/A	36648	35169
DC1200-CF-24V	Permanent Magnet	84710	83322	N/A	36648	35169
DC1600-LF-12V	Permanent Magnet	40709	34440	34973	36648	35169
DC1600-LF-24V	Permanent Magnet	63752	34968	34974	36648	35169
DC2000-MF-12V	Permanent Magnet	40709	34440	34973	36648	35169
DC2000-MF-24V	Permanent Magnet	63752	34968	34974	36648	35169
DC2000-MF-12V	Series Wound	39602	34969	34975	36648	35169
DC2000-MF-24V	Series Wound	39603	34970	34976	36648	35169
DC2000-LF-12V	Permanent Magnet	40709	34440	34973	36648	35169
DC2000-LF-24V	Permanent Magnet	63752	34968	34974	36648	35169
DC2500-LF-12V	Permanent Magnet	40709	34440	34973	36648	35169
DC2500-LF-24V	Permanent Magnet	63752	34968	34974	36648	35169
DC3000-LF-12V	Series Wound	39602	34969	34975	36648	35169
DC3000-LF-24V	Series Wound	39603	34970	34976	36648	35169



WARN COMMERCIAL: LABOR-SAVING WORKHORSES THAT GET THE JOB DONE.

At Warn Industries, you better believe hard work is our core value. What you'll see on these pages reflects a revamped line-up that's destined to change the way you work. From the do-all, innovative PullzAll™ lifting and pulling tool to the powerhouse 4700 DC winch, WARN products means one thing to you: letting one person do the work of two.



WARN Corded PullzAll™ Portable Lifting and Pulling Tool

- Lifts or pulls up to 1,000 lbs. (454 Kg)
- Replaces old-fashioned come-a-longs and chainfalls
- AC version perfect for use where power is available

When you're in the shop and have access to a power source, just plug in PullzAll and let it help you tackle those labor-intensive chores. Move heavy machinery. Hoist an engine block. Lift a load precisely into place, then nail it, weld it, whatever it. You think up the task, and PullzAll revolutionizes the amount of work one man can do.

PN 885000 (120V)
PN 885003 (230v EU)

PN 885004 (230v AUS)
PN 885002 (230v UK)

SPECIFICATIONS:

Switch: Forward/reverse

Trigger: Variable speed

Power: AC 120V / 230V

Wattage: 1200w

Load indicator: Electronic, with LED

Clutch: None

Brake: Dynamic

Wire rope: 7/32" X 15'
(6mm X 4.6m)

Weight: 15 lbs. (6.8 kg)

Dimensions:
20" L. x 12.50" W. x 13.25" H.
(.50m L. x .31m W. x .33m H.)

WARN Cordless PullzAll™ DC Powered Lifting and Pulling Tool

- Lifts or pulls up to 1,000 lbs. (454 Kg)
- Cordless 24V version is great for use in the field
- Includes two rechargeable battery packs (with charger)

When work takes you to more remote locations, bring the mechanical muscle of the portable, cordless PullzAll with you. From tough tasks like pulling pipe to stretching wire fence, you'll come to count on PullzAll to get the job done quickly and effortlessly. The color of versatility on the job is PullzAll red. Comes with two batteries.

PN 885005 PN 885006 (International)

SPECIFICATIONS:

Switch: Forward/reverse

Trigger: Variable speed

Power: 24 volt DC

Wattage: 7200w

Battery: Rechargeable NiMH
battery pack (with rapid charger)

Load indicator:
Electronic, with LED

Clutch: None

Brake: Dynamic

Wire rope:
7/32" X 15' (6mm X 4.6m)

Weight: 18 lbs. (8.2 kg)

Dimensions:
20" L. x 12.50" W. x 13.25" H.
(.50m L. x .31m W. x .33m H.)





WARN 4700 DC Heavy Puller for Trailers and General Load-Moving


The 4700 DC boasts a ready-for-anything attitude. Bring on the big loads, the big jobs no one wants to tackle. Couple 60' of wire rope with the powerful 3-stage planetary gear train and you've got a peerless load-mover. Pulls up to 4,700 lbs, no problem. **PN 94700**

SPECIFICATIONS:

Capacity: 4,700 lbs. (2130 kgs) single-line	Brake: Dynamic and mechanical braking
Switch type: Remote With 12' (3.7 m) Lead	Wire rope: 1/4" X 60' (18.3 m)
Motor: Permanent magnet	Fairlead: Hawse
HP: 1.9 hp 3.0" Diameter	Electrical leads: 2–6' (1.8 m) X 6 Gauge cable
Power: 12V DC	Weight: 42 lbs. (19.1 kg)
Gear train: 3-Stage Planetary	Warranty: Limited one year
Clutch control: Paddle	Replacement Wire Rope: PN 71297

12V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0 (0)	17.9 (5.5)	47 Amps	1/4700 (2130)
1000 (453.6)	12.8 (3.9)	82 Amps	2/3980 (1800)
2000 (907.2)	10.8 (3.3)	150 Amps	3/3450 (1560)
3000 (1360.8)	8.1 (2.5)	212 Amps	4/3041 (1380)
4000 (1814.4)	5.8 (1.8)	277 Amps	5/2720 (1230)
4700 (2132)	4.3 (1.3)	322 Amps	

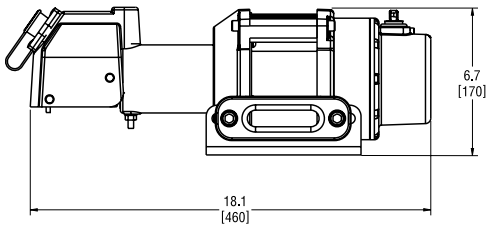

Winch dimensions:
12" L x 19.5" W x 8.0" H. (.30m L x .49m W x .20m H.)



WARN 3700 DC Great for Trailers and Work Sites

The redesigned 3700 DC has heavy-duty power, which makes it ideally suited for work sites. It's the perfect pulling tool for loading trailers, too. Rugged by design, the ultra-reliable 3700 DC makes a great addition to any workforce, pulling up to 3,700 lbs. **PN 93700**




SPECIFICATIONS:

Capacity: 3,700 lbs. (1680 kgs) single line	Brake: Dynamic and mechanical braking
Switch type: Remote With 12' (3.7 m) Lead	Wire rope: 7/32" X 43' (13 m)
Motor: Permanent Magnet	Fairlead: Roller
HP: 1.9 hp 3.0" Diameter	Electrical leads: 2–6' (1.8 m) X 6 Gauge Cable
Power: 12V DC	Weight: 35 lbs. (16.9 kg)
Gear train: 3-Stage planetary	Warranty: Limited one year
Clutch Control: Lever	Replacement wire rope: PN 78987

12V DC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0 (0)	20.4 (6.2)	30 Amps	1/3700 (1680)
500 (226.8)	15.8 (4.8)	76 Amps	2/3410 (1550)
1000 (453.6)	14.2 (4.3)	111 Amps	3/3170 (1440)
2000 (907.2)	10.9 (3.3)	180 Amps	4/2950 (1340)
3000 (1360.8)	7.7 (2.4)	249 Amps	
3000 (1360.8)	7.7 (2.4)	249 Amps	
3700 (1680)	5.4 (1.7)	297 Amps	

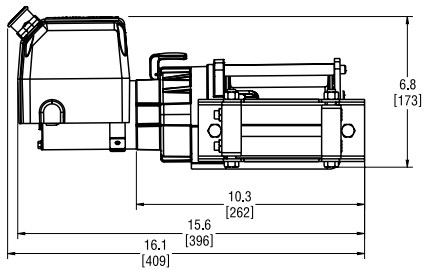

Winch dimensions:
18.0" L x 9.0" W x 4.6" H. (.45m L x .24m D x .22m H.)



WARN 1700 DC Light-Duty Trailer and Utility Winch


The WARN 1700 DC may be a small winch, but it's one big value when you consider the reliability and the overall quality. Built to handle lighter loads (to 1,700 lbs.), this winch is overflowing with upgraded features, including a hand-held remote to control power-in/power-out functions and tie rods for added stability. **PN 91700**

SPECIFICATIONS:

Capacity: 1,700 lbs. (1361 kgs) single line	Brake: Dynamic
Switch type: Remote With 12' (3.7 m) Lead	Wire rope: 3/16" X 35' (10.7 m)
Motor: Permanent magnet	Fairlead: Hawse
HP: 1.6 hp 3.0" Diameter	Electrical leads: 2–6' (1.8 m) X 8 Gauge Cable
Power: 12V DC	Weight: 18 lbs. (8.2 kg)
Gear train: Differential planetary	Warranty: Limited one year
Clutch control: Knob	Replacement wire rope: PN 79835

12V DC performance specs (first layer of drum)

Line Pull Lbs. (Kgs.)	Line Speed Ft./min. (M/min.)	Motor Current
0(0)	7.6(2.3)	7.9 Amps
500(227)	6.4(2.0)	24.8 Amps
1000(454)	5.4(1.7)	44.8 Amps
1500(680)	4.5(1.4)	64.9 Amps
1700(771)	4.0(1.2)	76.3 Amps

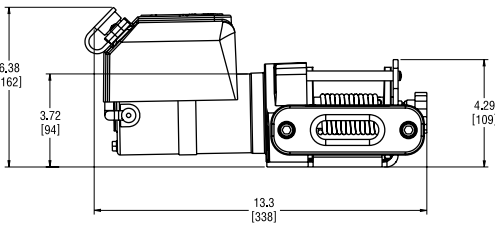

Winch dimensions:
20" L x 9.0" W x 8.0" H. (.35m L x .22m D x .21m H.)



WARN 3000 ACI A Plug-In Pulling Powerhouse


With a 3,000 lbs. pulling capacity, a TEFC Induction AC motor for a long duty cycle and 100' of 5/16" wire rope, the 3000 ACI is just what you need when you need a heavy-hauling AC-powered winch. The perfect fixed-mount station winch. **PN 93000**

SPECIFICATIONS:

Capacity: 3,000 lbs. (1361 kgs) single line	Brake: Dynamic and mechanical braking
Switch type: Drum switch/ station type	Wire rope: 5/16" X 100' (30.5 m)
Motor: TEFC induction AC motor	Fairlead: None
HP: 0.7 hp 56C	Electrical leads: None
Power: 115/230 volt	Weight: 76 lbs. (34.5 kg)
Gear train: 3-Stage Planetary	Warranty: Limited One Year
Clutch Control: Paddle	Replacement Wire Rope: PN 27110

120V AC performance specs (first layer of drum)

Line Pull Lbs. (kgs)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (kgs)
0(0)	12.2(3.7)	9.1 Amps	1/3000(1361)
1000(453.6)	8.8(2.7)	11.0 Amps	2/2700(1225)
1500(680.4)	8.8(2.7)	12.7 Amps	3/2460(1116)
2000(907.2)	8.6(2.6)	14.8 Amps	4/2250(1021)
2500(1134)	8.5(2.6)	17.7 Amps	5/2070(939)
3000(1360.8)	8.1(2.5)	20.9 Amps	

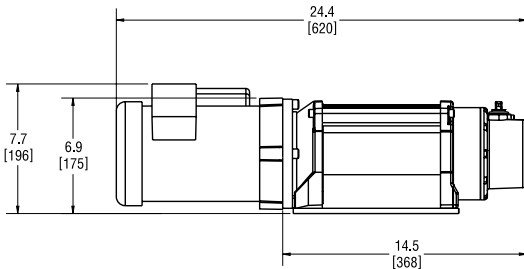

Winch dimensions:
11" L x 29" W x 13" H. (.28m L x .74m W x .33m H.)

Utility Winch Accessories



Utility Winch Rigging Kit

- Snatch block, rated to 7,000 lbs.
- 5/8" D-shackles • Load/anchor strap rated to 14,400 lbs.
- Nylon soft carrying case

PN 70792



PullzAll Rigging Kit

- Carry bag designed to hold PullzAll and rigging items
- 5/8" D-shackles • Two load anchor straps

PN: 685014



Portable Anchor Plate

- Mounting platform for WARN Utility winches
- Allows the winch to be portable and anchored to a variety of objects

PN 70770



PullzAll Battery

24V NiMH pack for the cordless PullzAll. Perfect for use as a spares, and as a direct-replacement unit.

PN 685013

PullzAll 12V charger

For use with cordless PullzAll, this product plugs into the accessory/cigarette lighter of your automobile and will charge the 24V NiMH battery.

PN 685012



Wireless Winch Control

- Controls your WARN 3700 and 4700 winches from up to 50' away
- Activation sequence guards against accidental power-ups
- Weather-resistant transmitter is easy to use

PN 79080



Remote Control

- Replacement remote control for WARN 3700 and 4700 winches with a 30' lead

PN: 69175



Quick Connect Plugs

- Allows for convenient connect/disconnect to the battery power source

PN: 65707



Roller Fairlead

- Assists in guiding the wire rope onto the winch drum
- Extends wire rope life
- Upgrade for WARN 1700/4700 winches

PN 64952



Hitch Adaptor

- Use to mount WARN Utility winches
- Mounts to 2" Class III receiver
- Black powder coat finish
- Hitch pin included

PN 68531



PullzAll Rigging Cable

Galvanized aircraft wire rope with loop on both ends allows you to hook up to another sharp object for an anchor point. Sold in packs of six.

PN 83362
10" length

PN 83361
24" length

JOHNSON VALLEY, CA—HAMMERTOWN. Time to put the hammer down. Somewhere in this shot there are 10,000+ crazed Ultra4 Rock Racing fans. Listen. You can almost hear their frenzy.

TRUCK AND AUTO PRODUCT APPLICATIONS BY VEHICLE MAKE AND MODEL

Application listing is current as of September 2011. Warn Industries is constantly developing new applications. If you can't find your vehicle listed here, call WARN customer service for the latest applications. In North America call 1-800-543-9276. Customers outside of North America can call 1-503-722-3008. Or check our web site: www.warn.com.

CONTENTS:

Chevrolet, GMC	114–118	Kia	128
Dodge	119–121	Land Rover	128
Ford	122–124	Mazda	128
Hummer	125	Nissan	129
International Harvester	125	Suzuki	129
Isuzu	125	Toyota	129–130
Jeep	126–128		

Chevrolet/GMC

MOUNTING SYSTEMS FOOTNOTES:

- V 20'/6m Power Lead (PN 32963) or 24'/8m Power Lead (PN 32966) required for winching from rear
- (10) Includes a set of WARN W350F wireless fog lamps
- (16) Fits Series 9 or 12 commercial winch with 12"/304.8mm wide foot print
- (29) Includes 50' of wire rope
- (31) Not compatible when installing M8274-50 winch

MOUNTING SYSTEMS

'07-11 SILVERADO 1500, 2WD & 4WD	
Trans4mer Grille Guard, Black	75230
Angled Light Bar, Black	73745
Brush Guard, Black	75590
Trans4mer Grille Guard, Stainless	76007
Angled Light Bar, Stainless	73753
Brush Guard, Stainless	75720
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (M8274-50 only)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
'03-06, '07 "CLASSIC" SILVERADO 1500, '03-06 AVALANCHE 1500 WITHOUT CLADDING, 2WD & 4WD	
Trans4mer Grille Guard, Black	76139
Angled Light Bar, Black	73745
Brush Guard, Black (Three-Bar Wrap Around)	65340
Trans4mer Grille Guard, Stainless	76243
Angled Light Bar, Stainless	73753
Brush Guard, Stainless (Three-Bar Wrap Around)	65535
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (M8274-50 only)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Hidden Mount, (9.5xp, XD9, M8, VR8, M6) (4WD only on '05+)	
	69015
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver	66215
'03-06 SILVERADO 1500HD, 2500 (NON-HD) 2WD & 4WD	
Trans4mer Grille Guard, Black	68162
Angled Light Bar, Black	73745
Brush Guard, Black (Three-Bar Wrap Around)	65340
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (16.5ti, M15, M12, M8274-50)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Hidden Mount, includes special short drum XD9000 winch ('03-05 only) ⁽²⁹⁾	
	62510
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver (Must be Rev. B0 or later)	65150

'11-12 SILVERADO 2500HD & 3500HD, 2WD & 4WD	
Gen II Trans4mer	
Mounting Kit, Large Frame, Black (Incl. Winch Carrier) (16.5ti, M15, M12, M8274-50)	85315
Mounting Kit, Mid Frame, Black (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	85310
Grille Guard Kit, Black	85495
Short Grille Guard Kit, Black ⁽³¹⁾	84785
Headlamp Guard Kit, Black	85505
Light Bar Kit, Black ⁽³¹⁾	80143
Receiver Kit, Black	80149
Mounting Kit, Large Frame, Stainless (Incl. Winch Carrier) (16.5ti, M15, M12, M8274-50)	85325
Mounting Kit, Mid Frame, Stainless (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	85320
Grille Guard Kit, Stainless	85500
Short Grille Guard Kit, Stainless ⁽³¹⁾	84790
Headlamp Guard Kit, Stainless	85510
Light Bar Kit, Stainless ⁽³¹⁾	80148
Receiver Kit, Black	80149
Heavy Duty Bumper, With Grille/Brush Guard, Black ⁽¹⁰⁾ (16.5ti, M15, M12, Com'I Series 9 & 12) Note: fits 2012 model	
	85887
Heavy Duty Bumper, Without Grille/Brush Guard, Black ⁽¹⁰⁾ (16.5ti, M15, M12, Com'I Series 9 & 12)Note: fits 2012 model	
	85883
'07-10 SILVERADO 2500HD & 3500HD, 2WD & 4WD	
Gen II Trans4mer	
Mounting Kit, Large Frame, Black (Incl. Winch Carrier) (16.5ti, M15, M12, M8274-50)	80975
Mounting Kit, Mid Frame, Black (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	80965
Grille Guard Kit, Black	80980
Short Grille Guard Kit, Black ⁽³¹⁾	84785
Headlamp Guard Kit, Black	81075
Light Bar Kit, Black ⁽³¹⁾	80143
Receiver Kit, Black	80149
Mounting Kit, Mid Frame, Stainless (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	80970
Grille Guard Kit, Stainless	81090
Short Grille Guard Kit, Stainless	84790
Headlamp Guard Kit, Stainless	81080
Light Bar Kit, Stainless	80148
Receiver Kit, Black	80149
Trans4mer Grille Guard, Black	76110
Angled Light Bar, Black	73745
Brush Guard, Black	75590
Trans4mer Grille Guard, Stainless	76111
Angled Light Bar, Stainless	73753
Brush Guard, Stainless	75720
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (16.5ti, M15, M12, M8274)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Winch Carrier, Com'I Series 9 & 12 ⁽¹⁶⁾	60420
Heavy Duty Bumper With Grille/Brush Guard, Black (16.5ti, M15, M12)	
	76401
Heavy Duty Bumper Without Grille/Brush Guard, Black (16.5ti, M15, M12)	
	76400

MOUNTING SYSTEMS (CONTINUED)

'03-06, '07 "CLASSIC" SILVERADO 2500HD & 3500, 2WD & 4WD	
Trans4mer Grille Guard, Black	76244
Angled Light Bar, Black	73745
Brush Guard, Black (Three-Bar Wrap Around)	65340
Trans4mer Grille Guard, Stainless	76245
Angled Light Bar, Stainless	73753
Brush Guard, Stainless (Three-Bar Wrap Around)	65535
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (16.5ti, M15, M12, M8274)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Winch Carrier, Com'I Series 9 & 12 ⁽¹⁶⁾	60420
Hidden Mount, includes special short drum XD9000 winch ('03-05 only) ⁽²⁹⁾	
	62510
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver	65150
Heavy Duty Bumper, With Grille/Brush Guard, Black ('03-05)(16.5ti, M15, M12)	
	66240
Heavy Duty Bumper, With Grille/Brush Guard, Black ('06, '07 "Classic")(16.5ti, M15, M12)	
	74760
Heavy Duty Bumper, Without Grille/Brush Guard, Black ('03-06; '07 "Classic")(16.5ti, M15, M12)	
	74690
'02-06 AVALANCHE 1500 WITH CLADDING	
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver	66215
'01-02 SILVERADO 2500HD AND 3500, 2WD & 4WD	
Trans4mer Grille Guard, Black	61145
Angled Light Bar, Black	73745
Brush Guards, Black (Three-Bar Wrap Around)	39190
Receiver, Black only (use with Trans4mer only)	29397
Trans4mer Grille Guard, Stainless	63234
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Three-Bar Wrap Around)	60448
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (16.5ti, M15, M12, M8274-50)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Winch Carrier, Com'I Series 9 & 12 ⁽¹⁶⁾	60420
Hidden Mount, includes special short drum XD9000 winch ⁽²⁹⁾	
	62510
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver (Must be Rev. B0 or later)	60268

'07-11 AVALANCHE, TAHOE, SUBURBAN, 1/2 TON ONLY, 2WD & 4WD	
Trans4mer Grille Guard, Black	74140
Angled Light Bar, Black	73745
Brush Guards, Black	74830
Trans4mer Grille Guard, Stainless	74141
Angled Light Bar, Stainless	73753
Brush Guards, Stainless	74820
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
'07-11 SUBURBAN, 3/4 TON ONLY, 2WD & 4WD	
Trans4mer Grille Guard, Black	76420
Angled Light Bar, Black	73745
Brush Guards, Black	74830
Trans4mer Grille Guard, Stainless	76425
Angled Light Bar, Stainless	73753
Brush Guards, Stainless	74820
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
'99-02 SILVERADO, '00-06 TAHOE, SUBURBAN, 1/2 TON ONLY, 2WD & 4WD	
Trans4mer Grille Guard, Black	39185
Angled Light Bar, Black	73745
Brush Guards, Black (Three-Bar Wrap Around)	39190
Trans4mer Grille Guard, Stainless	63672
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Three-Bar Wrap Around)	60448
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (M12, M8274-50)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Winch Carrier, Com'I Series 9 & 12 ⁽¹⁶⁾	60420
Hidden Mount, (9.5xp, XD9, M8, VR8, M6) ⁽²⁰⁾	
	61770
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver	38490

MOUNTING SYSTEMS FOOTNOTES:

- V 20'/6m Power Lead (PN 32963) or 24'/8m Power Lead (PN 32966) required for winching from rear
- (16) Fits Series 9 or 12 commercial winch with 12"/304.8mm wide foot print
- (20) Roller Fairlead Cover 35363 is highly recommended
- (29) Includes 50' of wire rope



MOUNTING SYSTEMS
FOOTNOTES:

- V 20'/6m Power Lead (PN 32963) or 24'/8m Power Lead (PN 32966) required for winching from rear
- (16) Fits Series 9 or 12 commercial winch with 12"/304.8mm wide foot print
- (20) Roller Fairlead Cover 25580 is highly recommended
- (29) Includes 50' of wire rope

MOUNTING SYSTEMS (CONTINUED)

'99–02 SILVERADO, '00–06 SUBURBAN, 3/4 TON ONLY, 2WD & 4WD; '01–02 1500HD CREW CAB	
Trans4mer Grille Guard, Black	60036
Angled Light Bar, Black	73745
Brush Guards, Black (Three-Bar Wrap Around)	39190
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (M12, M8274-50)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Winch Carrier, Com'l Series 9 & 12 ⁽¹⁶⁾	60420
Hidden Mount, includes special short drum XD9000 winch ⁽²⁹⁾	62510
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver	60268
'07–11 GMC SIERRA 1500 1/2 TON, 2WD & 4WD	
Trans4mer Grille Guard, Black	75230
Angled Light Bar, Black	73745
Brush Guard, Black	77675
Trans4mer Grille Guard, Stainless	76007
Angled Light Bar, Stainless	73753
Brush Guard, Stainless	77680
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (M8274-50 only)	62027
SST Stainless Steel Carrier Cover (for carrier above)	63135
'03–06, '07 “CLASSIC” GMC 1500 SIERRA 1/2 TON 2WD & 4WD	
Trans4mer Grille Guard, Black	76246
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	67730
Trans4mer Grille Guard, Stainless	76261
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Two-Bar Wrap Around)	67731
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (M8274-50 only)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Hidden Mount (9.5xp, XD9, M8, VR8, M6)(4wd only 05+) ⁽²⁰⁾	69015
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver	66215

'11–12 GMC 2500HD & 3500HD, 2WD & 4WD	
Gen II Trans4mer	
Mounting Kit, Large Frame, Black (Incl. Winch Carrier) (16.5ti, M15, M12, M8274-50)	85315
Mounting Kit, Mid Frame, Black (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	85310
Grille Guard Kit, Black	85495
Short Grille Guard Kit, Black ⁽³¹⁾	84785
Headlamp Guard Kit, Black	85505
Light Bar Kit, Black ⁽³¹⁾	80143
Receiver Kit, Black	80149
Mounting Kit, Large Frame, Stainless (Incl. Winch Carrier) (16.5ti, M15, M12, M8274-50)	85325
Mounting Kit, Mid Frame, Stainless (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	85320
Grille Guard Kit, Stainless	85500
Short Grille Guard Kit, Stainless ⁽³¹⁾	84790
Headlamp Guard Kit, Stainless	85510
Light Bar Kit, Stainless ⁽³¹⁾	80148
Receiver Kit, Black	80149
'07–10 GMC SIERRA 2500HD & 3500HD, 2WD & 4WD	
Trans4mer Grille Guard, Black	76110
Angled Light Bar, Black	73745
Brush Guard, Black	76450
Trans4mer Grille Guard, Stainless	76111
Angled Light Bar, Stainless	73753
Brush Guard, Stainless	76455
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (16.5ti, M15, M12, M8274)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Winch Carrier, Com'l Series 9 & 12 ⁽¹⁶⁾	60420
'03–06, '07 “CLASSIC” GMC SIERRA 2500HD & 3500, 2WD & 4WD	
Trans4mer Grille Guard, Black	76248
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	67730
Trans4mer Grille Guard, Stainless	76249
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Two-Bar Wrap Around)	67731
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (16.5ti, M15, M12, M8274-50)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Winch Carrier, Com'l Series 9 & 12 ⁽¹⁶⁾	60420
Hidden Mount, includes special short drum XD9000 winch ('03-05 only) ⁽²⁹⁾	62510
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver	65150

MOUNTING SYSTEMS (CONTINUED)

'03–06 GMC SIERRA 1500HD, 2500 (NON-HD) 2WD & 4WD	
Hidden Mount, includes special short drum XD9000 winch ('03-05 only) ⁽²⁹⁾	62510
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver (must be Rev. B0 or later)	65150
'99–02 GMC SIERRA, '00–06 YUKON, YUKON XL, 1/2 TON ONLY, 2WD & 4WD (EXCLUDES DENALI)	
Trans4mer Grille Guard, Black	39477
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	67730
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (M12, M8274-50)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Winch Carrier, Com'l Series 9 & 12 ⁽¹⁶⁾	60420
Hidden Mount (9.5xp, XD9, M8, VR8, M6) ⁽²¹⁾	61770
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver	38490
'99–02 GMC SIERRA, '00–06 YUKON XL, 3/4 TON ONLY, 2WD & 4WD; '01–02 1500HD CREW CAB	
Trans4mer Grille Guard, Black	60319
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	67730
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (M12, M8274-50)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Winch Carrier, Com'l Series 9 & 12 ⁽¹⁶⁾	60420
Hidden Mount, includes special short drum XD9000 winch ⁽²⁹⁾	62510
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Front Receiver	60268

'88–99 CHEV/GMC K-SERIES 4WD PICKUP 1/2, 3/4, 1 TON, '92–99 4WD BLAZER, YUKON, SUBURBAN, TAHOE (EXCLUDES R/V 1 TON & 2WD C3500 HD, NEW DESIGN '99 SILVERADO)	
Trans4mer Grille Guard, Black ^S	29753
Light Bar, Black ^(*)	29169
Brush Guards, Black (Non-Wrap Around)	29768
Trans4mer Grille Guard, Stainless ^S	65654
Receiver, Black only (use with Trans4mer only)	29166
Winch Carrier (VR10, XD9i, XD9, M8, VR8, M6) ^J	29165
Winch Carrier (VR12, 9.5cti, 9.5xp)	39781
Winch Carrier (M8274-50)	30040
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver ^I	25897
'81–87 PICKUP 1/2, 3/4, 1 TON; '81–88 PICKUP 1 TON; '81–91 BLAZER, JIMMY, SUBURBAN, 1 TON R/V PICKUP	
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver	25855
'98–04 S-10 4WD PICKUP, 4WD BLAZER (FITS MODELS WITH BUMPER RUB STRIP ONLY; DOES NOT FIT GMC SONOMA, JIMMY, HIGHRIDER)	
Trans4mer Grille Guard, Black	37175
Light Bar, Black ^(*)	29169
Brush Guards, Black (Non-Wrap Around)	30146
Receiver, Black only (use with Trans4mer only)	29166
Winch Carrier (VR10, XD9i, XD9, M8, VR8, M6) ^J	29165
Winch Carrier (9.5cti, 9.5xp)	39781
'98–04 ZR2 PICKUP, BLAZER, S-10 4WD PICKUP (FITS MODEL WITHOUT BUMPER RUB STRIP; DOES NOT FIT GMC SONOMA, JIMMY, HIGHRIDER)	
Trans4mer Grille Guard, Black	38475
Light Bar, Black ^(*)	29169
Brush Guards, Black (Non-Wrap Around)	30146
Receiver, Black only (use with Trans4mer only)	29166
Winch Carrier (VR10, XD9i, XD9, M8, VR8, M6) ^J	29165
Winch Carrier (9.5cti, 9.5xp)	39781
'94–97 S-SERIES & SONOMA 4WD PICKUP; '95–97 BLAZER, JIMMY, 4WD ONLY, INCLUDES ZR2 & HIGHRIDER	
Trans4mer Grille Guard, Black ⁽³⁾	30090
Light Bar, Black ^(*)	29169
Brush Guards, Black (Non-Wrap Around)	30146
Receiver, Black only (use with Trans4mer only)	29166
Winch Carrier (VR10, XD9i, XD9, M8, VR8, M6) ^J	29165
Winch Carrier (9.5cti, 9.5xp)	39781

MOUNTING SYSTEMS
FOOTNOTES:

- I Will not fit 2WD
- J Must be revision #B0 for 9000 winch PN 27550 or 28500
- S For 2WD trucks the bumper or grille guard will match the front-end styling of the truck. However, the frame brackets will not fit and will require significant rework
- V 20'/6m Power Lead (PN 32963) or 24'/8m Power Lead (PN 32966) required for winching from rear
- (3) GMC SLE, SLS and SLT require slots to be cut into plastic bumper cover
- (16) Fits Series 9 or 12 commercial winch with 12"/304.8mm wide foot print
- (21) Roller Fairlead Cover 25580 is highly recommended
- (29) Includes 50' of wire rope
- (*) Cannot be used with winch carrier when winch is mounted



4X FLARES
FOOTNOTES:

- B Flares do not fit boxes for dual wheel axles
- C Requires drilling door panel
- D Two door only
- K Does not fit LTZ model
- (*) Does not fit 'Quadra Steer' equipped vehicles

4X FLARES: CHEVROLET

C/K Pickup Front	'73-80	29871	Sportside Pickup Rear	'88-98	30746	K Blazer Rear	'92-94	26734
C/K Pickup Rear	'73-80	27996	Silverado Sportside Front	'99-06	64420	Tahoe 2 dr Front	'95-99	26548
C/K Pickup Front	'81-87	27993	Silverado Sportside Rear	'99-06	60785	Tahoe 2 dr Rear	'95-99	26734
C/K Pickup Rear	'81-87	27996	Suburban Front	'81-91	27993	Tahoe 4 dr Front	'95-99	26548
C/K Pickup Front	'88-00	26548	Suburban Rear	'81-91	27996	Tahoe 4 dr Rear	'95-99	34238
C/K Pickup Rear ^B	'88-00	26734	Suburban Front	'92-99	26548	Tahoe 4 dr Front	'00-06	64420
Silverado Pickup Front	'99-06	64420	Suburban Rear	'92-99	26734	Tahoe 4 dr Front W/OE boards	'00-06	60860
Silverado Pickup Front	'07 Classic	64420	Suburban Front	'00-06	64420	Tahoe 4 dr Rear	'00-06	61115
Silverado Pickup Rear ^(*)	'99-06	39025	Suburban Front W/OE boards	'00-06	60860	Tahoe 4 dr Front ^K	'07-11	74130
Silverado Pickup Rear ^(*)	'07 Classic	39025	Suburban Rear	'00-06	61095	Tahoe 4 dr Rear ^K	'07-11	74135
Silverado Pickup Front	'07-11	75190	Suburban Front ^K	'07-11	74130	S-10 Pickup Front	'82-93	26558
Silverado Pickup Rear ^B	'07-11	75195	Suburban Rear ^K	'07-11	74215	S-10 Pickup Rear	'82-93	26736
C/K Crew Cab Front	'81-91	27993	Avalanche Front	'07-11	74130	S-10 Pickup Front	'94-00	32956
C/K Crew Cab Rear ^B	'81-91	27996	Avalanche Rear	'07-11	74205	S-10 Pickup Rear	'94-00	32957
C/K Crew Cab Front	'92-00	26548	K Blazer Front	'81-91	27993	S-10 Blazer Front	'82-94	26558
C/K Crew Cab Rear ^B	'92-00	26734	K Blazer Rear	'81-91	27996	S-10 Blazer Rear ^D	'82-94	29894
Sportside Pickup Front	'88-98	26548	K Blazer Front	'92-94	26548			

4X FLARES: gmc

C/K Pickup Front	'73-80	29871	Sierra 1500 Rear (6'+8" Box Only)	'07-11	75965	Yukon 2 dr Rear	'95-99	26734
C/K Pickup Rear	'73-80	27996	Sierra 1500 Rear (69.2" Box)	'07-11	76405	Yukon 4 dr Front	'95-99	26548
C/K Pickup Front	'81-87	27993	Sierra HD Front	'07-11	76620	Yukon 4 dr Rear	'95-99	34238
C/K Pickup Rear	'81-87	27996	Sierra HD Rear (6'+8" Box Only)	'07-11	75965	Yukon 4 dr Front	'07-11	74130
C/K Pickup Front	'88-98	26548	Sierra Sportside Front	'99-06	64420	Yukon 4 dr Rear ^I	'07-11	74135
C/K Pickup Rear ^B	'88-98	26734	Sierra Sportside Rear	'99-06	60785	Yukon XL Front	'07-11	74130
Sierra Pickup Front	'99-06	64420	Suburban Front	'81-91	27993	Yukon XL Rear ^I	'07-11	74215
Sierra Pickup Front	'07 Classic	64420	Suburban Rear	'81-91	27996	S-15 Pickup Front	'82-93	26558
Sierra Pickup Rear ^(*)	'99-06	39025	Suburban Front	'92-99	26548	S-15 Pickup Rear	'82-93	26736
Sierra Pickup Rear ^(*)	'07 Classic	39025	Suburban Rear	'92-99	26734	S-15 Pickup Front	'94-00	32956
C/K Crew Cab Front	'81-91	27993	K Jimmy Front	'81-91	27993	S-15 Pickup Rear	'94-00	32957
C/K Crew Cab Rear ^B	'81-91	27996	K Jimmy Rear	'81-91	27996	S-15 Jimmy Front	'82-94	26558
C/K Crew Cab Front	'92-00	26548	K Jimmy Front	'92-94	26548	S-15 Jimmy Rear ^D	'82-94	29894
C/K Crew Cab Rear ^B	'92-00	26734	K Jimmy Rear	'92-94	26734			
Sierra 1500 Front	'07-11	75970	Yukon 2 dr Front	'95-99	26548			

4WD HUBS
FOOTNOTES:

- G Vehicles with full-time 4WD will require a transfer case conversion kit
- H When replacing automatic 3-hole cap screw hubs with manual hubs, you must purchase corresponding spindle nut conversion kit per application chart
- J Not for front axle disconnect systems

4WD HUBS

	Year	Cautionary Footnotes	Spline Count	Standard Manual PN	Premium Manual PN	Spindle Nut Kit Std/Prem	Hub Service Kit Std	Prem
Blazer, Jimmy, Suburban	'69-91	G, H	19	9790	20990	32720	11967	20825
1/2 Ton Pickup	'69-87	G, H	19	9790	20990	32720	11967	20825
3/4 Ton Pickup	'60-76	G	19		9072			7302
3/4 Ton Pickup	'77-87	G, H	19	9790	20990	32720	11967	20825
1 Ton Pickup	'76-87	H	30	11690	38826	32721	11714	
1 Ton Pickup, V-Series Crew Cab	'88-90	H	30	11690	38826	32721	11714	
Geo/Chevrolet Tracker	'89-00	J	26	39198	34581			7309

MOUNTING SYSTEMS

'09-12 DODGE RAM 1500

Gen II Trans4mer

Mounting Kit, Mid Frame, Black (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	80715
Grille Guard Kit, Black	81610
Short Grille Guard Kit, Black	84785
Headlamp Guard Kit, Black	81620
Light Bar, Black	80143
Receiver Kit, Black	80149
Mounting Kit, Mid Frame, Stainless (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	81270
Grille Guard Kit, Stainless	81615
Short Grille Guard Kit, Stainless	84790
Headlamp Guard Kit, Stainless	81625
Light Bar, Stainless	80148
Receiver Kit, Black	80149

'06-08 DODGE 1500 2WD & 4WD INCLUDING "SPORT" PACKAGE (WILL NOT RETAIN FACTORY TOW HOOKS)

Trans4mer Grille Guard, Black ⁽³⁰⁾	75515
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	72470
Trans4mer Grille Guard, Stainless ⁽³⁰⁾	75520
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Two-Bar Wrap Around)	72469
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (M8274-50 only)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135

'02-05 DODGE 1500 2WD & 4WD INCLUDING "SPORT" PACKAGE (WILL NOT RETAIN FACTORY TOW HOOKS)

Trans4mer Grille Guard, Black ⁽³⁰⁾	76251
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	63653
Trans4mer Grille Guard, Stainless ⁽³⁰⁾	76252
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Two-Bar Wrap Around)	63654
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (M8274-50 only)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135

Hidden Mount Winch Kit (9.5xp, XD9, M8, VR8, M6)	63670
--	-------

Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver	63570

'11-12 DODGE RAM HD 4500 & 5500

Gen II Trans4mer

Mounting Kit, Large Frame, Black (Incl. Winch Carrier) (16.5ti, M15, M12, M8274-50)	85360
Mounting Kit, Mid Frame, Black (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	85350
Grille Guard Kit, Black	81610
Short Grille Guard Kit, Black ⁽³¹⁾	84785
Headlamp Guard Kit, Black	82695
Light Bar, Black ⁽³¹⁾	80143
Receiver Kit, Black	80149

Mounting Kit, Large Frame, Stainless (Incl. Winch Carrier) (16.5ti, M15, M12, M8274-50)	85365
---	-------

Mounting Kit, Mid Frame, Stainless (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	85355
Grille Guard Kit, Stainless	81615
Short Grille Guard Kit, Stainless ⁽³¹⁾	84790
Headlamp Guard Kit, Stainless	82700
Light Bar, Stainless ⁽³¹⁾	80148
Receiver Kit, Black	80149

Heavy Duty Bumper, With Grille/Brush Guard, Black ⁽¹⁰⁾ (16.5ti, M15, M12, Com'I Series 9 & 12) Note: fits 2012 model	85886
---	-------

Heavy Duty Bumper, Without Grille/Brush Guard, Black ⁽¹⁰⁾ (16.5ti, M15, M12, Com'I Series 9 & 12) Note: fits 2012 model	85882
--	-------

'07-10 DODGE RAM HD 4500 & 5500, '07-10 STERLING BULLET 4500 & 5500

Gen II Trans4mer

Mounting Kit, Large Frame, Black (Incl. Winch Carrier) (16.5ti, M15, M12, M8274-50)	81260
Mounting Kit, Mid Frame, Black (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	81670
Grille Guard Kit, Black	81672
Short Grille Guard Kit, Black ⁽³¹⁾	85140
Headlamp Guard Kit, Black	81668
Light Bar, Black ⁽³¹⁾	80143
Receiver Kit, Black	80149

Mounting Kit, Mid Frame, Stainless (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	81671
Grille Guard Kit, Stainless	81673
Short Grille Guard Kit, Stainless ⁽³¹⁾	85145
Headlamp Guard Kit, Stainless	81669
Light Bar, Stainless ⁽³¹⁾	80148
Receiver Kit, Black	80149

MOUNTING SYSTEMS
FOOTNOTES:

- V 20'/6m Power Lead (PN 32963) or 24'/8m Power Lead (PN 32966) required for winching from rear
- (10) Includes a set of WARN W350F wireless fog lamps
- (30) Additional drilling/grinding required for factory tow hook equipped vehicles
- (31) Not compatible when installing M8274-50 winch



MOUNTING SYSTEMS FOOTNOTES:

- V 20'/6m Power Lead (PN 32963) or 24'/8m Power Lead (PN 32966) required for winching from rear
- (10) Includes a set of WARN W350F wireless fog lamps
- (16) Fits Series 9 or 12 commercial winch with 12"/304.8mm wide foot print
- (25) Must be Revision B0 for 2001 and later models
- (31) Not compatible when installing M8274-50 winch

MOUNTING SYSTEMS (CONTINUED)

'10-12 DODGE RAM HD 2500 & 3500 2WD & 4WD	
Gen II Trans4mer	
Mounting Kit, Large Frame, Black (Incl. Winch Carrier) (16.5ti, M15, M12, M8274-50)	82760
Mounting Kit, Mid Frame, Black (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	
Grille Guard Kit, Black	82750
Short Grille Guard Kit, Black	81610
Headlamp Guard Kit, Black	84785
Light Bar, Black	82695
Receiver Kit, Black	80143
Mounting Kit, Large Frame, Stainless (Incl. Winch Carrier) (16.5ti, M15, M12, M8274-50)	
86535	
Mounting Kit, Mid Frame, Stainless (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	
82755	
Grille Guard Kit, Stainless	81615
Short Grille Guard Kit, Stainless	84790
Headlamp Guard Kit, Stainless	82700
Light Bar, Stainless	80148
Receiver Kit, Black	80149
Heavy Duty Bumper, With Grille/Brush Guard, Black⁽¹⁰⁾ (16.5ti, M15, M12, Com'l Series 9 & 12) Note: fits 2012 models	
85886	
Heavy Duty Bumper, Without Grille/Brush Guard, Black⁽¹⁰⁾ (16.5ti, M15, M12, Com'l Series 9 & 12) Note: fits 2012 models	
85882	
'06-09 DODGE RAM HD 2500 & 3500 2WD & 4WD; INCLUDING MEGACAB & MEGACAB 1500 (WILL NOT RETAIN FACTORY TOW HOOKS, EXCLUDES "SPORT" PACKAGE)	
Trans4mer Grille Guard, Black	
75525	
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	72470
Trans4mer Grille Guard, Stainless	
75530	
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Two-Bar Wrap Around)	72469
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (16.5ti, M15, M12, M8274-50)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Heavy Duty Bumper With Grille/Brush Guard, Black (16.5ti, M15, M12)	
72374	
Heavy Duty Bumper Without Grille/Brush Guard, Black (16.5ti, M15, M12)	
74120	
'06-09 DODGE RAM HD 2500 & 3500 2WD & 4WD; INCLUDING MEGACAB & MEGACAB 1500*LARAMIE ONLY* (WILL NOT RETAIN FACTORY TOW HOOKS, EXCLUDES "SPORT" PACKAGE)	
Trans4mer Grille Guard, Black	
75790	
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	72470
Trans4mer Grille Guard, Stainless	
75795	
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Two-Bar Wrap Around)	72469
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (16.5ti, M15, M12, M8274-50)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Heavy Duty Bumper With Grille/Brush Guard, Black (16.5ti, M15, M12)	
72374	
Heavy Duty Bumper Without Grille/Brush Guard, Black (16.5ti, M15, M12)	
74120	

'03-05 DODGE RAM HD 2500 & 3500 2WD & 4WD (WILL NOT RETAIN FACTORY TOW HOOKS, EXCLUDES "SPORT" PACKAGE)	
Trans4mer Grille Guard, Black	
76253	
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	63653
Trans4mer Grille Guard, Stainless	
76254	
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Two-Bar Wrap Around)	63654
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (16.5ti, M15, M12, M8274-50)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Heavy Duty Bumper With Grille/Brush Guard, Black (16.5ti, M15, M12)	
65880	
Heavy Duty Bumper Without Grille/Brush Guard, Black (16.5ti, M15, M12)	
74120	
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	
26370	
Multi-Mount Winch Frame (PowerPlant HP) ^V	
75330	
Front Receiver (factory tow hooks can be used)	65370
'94-02 DODGE RAM PICKUP 3/4, 1 TON 2WD & 4WD; '94-01 RAM PICKUP 1/2 TON 2WD & 4WD (EXCLUDES '02 RAM 1/2 TON NEW BODY STYLE; EXCLUDES '99-02 "SPORT" PACKAGE)	
Trans4mer Grille Guard, Black	
30092	
Angled Light Bar, Black	73745
Brush Guards, Black (Non-Wrap Around)	30106
Trans4mer Grille Guard, Stainless	
65656	
Angled Light Bar, Stainless	73753
Brush Guards, Stainless	65878
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (M12, M8274-50)	62027
SST Stainless Steel Carrier Cover (for 62027carrier)	63135
Winch Carrier, Com'l Series 9 & 12 ⁽¹⁶⁾	60420
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	
26370	
Multi-Mount Winch Frame (PowerPlant HP) ^V	
75330	
Front Receiver (will not work with factory tow hooks)	31727
'97-04 DAKOTA '97-03 DURANGO 4WD, INCLUDING "SPORT" PACKAGE	
Trans4mer Grille Guard, Black ⁽²⁵⁾	
35095	
Brush Guards, Black (Non-Wrap Around)	35097
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for carrier above)	63130

4WD HUBS

	Year	Cautionary Footnotes	Spline Count	Standard Manual PN	Premium Manual PN	Spindle Nut Kit Std/Prem	Hub Service Kit Std	Prem
1/2 Ton Pickup	'57-68		19		9072			7302
1/2 Ton Pickup & Ramcharger	'69-74		19	9790	20990		11967	20825
1/2, 3/4 Ton Pickup & Ramcharger	'80-93		19	9790	20990		11967	20825
3/4 Ton Pickup	'90-93		30	11690	38826		11714	11714
3/4 Ton Pickup	'57-74		19		9072			7302
1 Ton Pickup	'90-93		30	11690	38826		11714	11714

4X FLARES

	Year	PN
Ram Front ^A	'94-01	30210
Ram Rear ^B	'94-01	30211
Ram 2500, 3500 Front	'02	30210
Ram 2500, 3500 Rear ^B	'02	30211
Ram 2500, 3500 Front	'03-09	63860
Ram 2500, 3500 Rear (short box) ^B	'03-09	63865
Ram 2500, 3500 Rear (long box) ^B	'03-09	64545
Ram 1500 Front	'02-08	63860
Ram 1500 Rear (short box)	'02-08	63865
Ram 1500 Rear (long box)	'02-08	64545

4X FLARES FOOTNOTES:

- A Front Flares partially cover door opening
- B Flares do not fit boxes for dual wheel axles



MOUNTING SYSTEMS
FOOTNOTES:

- (4) Moves factory bumper forward five inches
- (5) Intended to be sold with PN 38772
- (10)Includes a set of WARN W350F wireless fog lamps
- (13) Will not fit 2WD models with coil springs. Will not fit Excursion. Will not fit trucks built after mid-Sept. '00 with blocker beam
- (16) Fits Series 9 or 12 commercial winch with 12"/304.8mm wide foot print
- (22) Roller Fairlead Cover 25580 recommended
- (24) Cannot be used with optional factory driving lights
- (26) Carrier will block the factory fog/ driving lights on vehicles so equipped
- (27) All Excursions, most Super Dutys built 10/00 and later
- (29) For '04 model receiver applications, use the Trans4mer Grille Guard in combination with the receiver option 29397
- (31) Not compatible when installing M8274-50 winch

V 20'/6m Power Lead (PN 32963) or 24'/8m Power Lead (PN 32966) required for winching from rear

- (*) Moves factory bumper forward five and a half inches
- (*) Intended to be sold with PN 70490
- (*) F-450/550 will require trimming of factory front flare to clear brush guard tubes
- (*) Note: SST requires trimming when used with Brush Guards

MOUNTING SYSTEMS

'11–12 SUPER DUTY, F-250, F-350, F-450, F-550, 2WD & 4WD

Gen II Trans4mer	
Mounting Kit, Large Frame, Black (Incl. Winch Carrier) (16.5ti, M15, M12, M8274-50)	84275
Mounting Kit, Mid Frame, Black (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	84265
Grille Guard Kit, Black.....	85055
Short Grille Guard Kit, Black ⁽³¹⁾	84785
Headlamp Guard Kit, Black.....	84795
Light Bar Kit, Black ⁽³¹⁾	80143
Receiver Kit, Black.....	80149
Mounting Kit, Large Frame, Stainless (Incl. Winch Carrier) (16.5ti, M15, M12, M8274-50)	84745
Mounting Kit, Mid Frame, Stainless (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	84270
Grille Guard Kit, Stainless	85060
Short Grille Guard Kit, Stainless ⁽³¹⁾	84790
Headlamp Guard Kit, Stainless.....	84980
Light Bar Kit, Stainless ⁽³¹⁾	80148
Receiver Kit, Black.....	80149
Semi-Hidden Mount (16.5ti, M15, M12) ⁽⁴⁾	84515
Skirting Kit (required for above kit)	84520

Heavy Duty Bumper , With Grille/Brush Guard, Black ⁽¹⁰⁾ (16.5ti, M15, M12, Com'I Series 9 & 12) Note: fits 2012 models.....	85885
Heavy Duty Bumper , Without Grille/Brush Guard, Black ⁽¹⁰⁾ (16.5ti, M15, M12, Com'I Series 9 & 12) Note: fits 2012 models.....	85881

'08–10 SUPER DUTY, F-250, F-350, F-450, F-550, 2WD & 4WD

Gen II Trans4mer	
Mounting Kit, Large Frame, Black (Incl. Winch Carrier) (16.5ti, M15, M12, M8274-50)	80140
Mounting Kit, Mid Frame, Black (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	80150
Grille Guard Kit, Black.....	80141
Short Grille Guard Kit, Black ⁽³¹⁾	85140
Headlamp Guard Kit, Black.....	80142
Light Bar Kit, Black ⁽³¹⁾	80143
Receiver Kit, Black.....	80149

Mounting Kit, Mid Frame, Stainless (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	80155
Grille Guard Kit, Stainless	80146
Short Grille Guard Kit, Stainless.....	85145
Headlamp Guard Kit, Stainless.....	80147
Light Bar Kit, Stainless.....	80148
Receiver Kit, Black.....	80149

Trans4mer Grille Guard, Black	75810
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	75850
Trans4mer Grille Guard, Stainless	75815
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Two-Bar Wrap Around).....	75849
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier) ^(*)	63130
Winch Carrier (16.5ti, M15, M12, M8274-50) ⁽²⁶⁾	62027
SST Stainless Steel Carrier Cover (for 62027 carrier) ^(*)	63135
Winch Carrier, Com'I Series 9 & 12 ⁽¹⁶⁾	60420

'08–10 SUPER DUTY, F-250, F-350, F-450, F-550, 2WD & 4WD (CONTINUED)

Semi-Hidden Mount (16.5ti, M15, M12) ^{(4)(*)}	78105
Skirting Kit (required for above kit)	78319

Heavy Duty Bumper With Grille/Brush Guard, Black (16.5ti, M15, M12)	74777
Heavy Duty Bumper Without Grille/Brush Guard, Black (16.5ti, M15, M12)	76250

Front Skid Plate	76585
Transmission Skid Plate	76590

'05–07 SUPER DUTY, F-250, F-350, F-450, F-550, 2WD & 4WD; EXCLUDES EXCURSION

Trans4mer Grille Guard, Black	76256
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	69685
Trans4mer Grille Guard, Stainless	76255
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Two-Bar Wrap Around).....	70017
Receiver, Black only (use with Trans4mer only).....	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (16.5ti, M15, M12, M8274-50) ⁽²⁶⁾	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Winch Carrier, Com'I Series 9 & 12 ⁽¹⁶⁾	60420

Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver	70480

Semi-Hidden Mount (16.5ti, M15, M12) ^(*) (*) ⁽²⁴⁾	70005
Skirting Kit (required for above kit)	70490

Heavy Duty Bumper With Grille/Brush Guard, Black (16.5ti, M15, M12) ^(*) ⁽³⁾	70650
Heavy Duty Bumper Without Grille/Brush Guard, Black (16.5ti, M15, M12)	73990

'99–04 SUPER DUTY, F-250, F-350, F-450, F-550, 2WD & 4WD; '00–04 EXCURSION

Trans4mer Grille Guard, Black	76258
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	38060
Trans4mer Grille Guard, Stainless	76257
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Two-Bar Wrap Around).....	60450
Receiver, Black only (use with Trans4mer only).....	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (16.5ti, M15, M12, M8274) ⁽²⁶⁾	62027
SST Stainless Steel Carrier Cover (for 62027 carrier).....	63135
Winch Carrier, Com'I Series 9 & 12 ⁽¹⁶⁾	60420

Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver ('99–01) ⁽¹³⁾	38450
Front Receiver, for '01–03 vehicles equipped with blocker beam ⁽²⁷⁾	
Will not fit '04 models ⁽²⁹⁾	62524

Semi-Hidden Mount (16.5ti, M15, M12) ⁽⁴⁾⁽⁵⁾⁽²²⁾⁽²⁴⁾	62289
Skirting Kit (required for above kit)	38772

Heavy Duty Bumper With Grille/Brush Guard, Black (16.5ti, M15, M12)	63600
--	-------

MOUNTING SYSTEMS (CONTINUED)

'09-12 F-150 4WD

Gen II Trans4mer	
Mounting Kit, Mid Frame, Black (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	80160
Grille Guard Kit, Black.....	80161
Short Grille Gaurd Kit, Black.....	85140
Headlamp Guard Kit, Black	80162
Light Bar Kit, Black	80143
Receiver Kit, Black.....	80149

Mounting Kit, Mid Frame, Stainless (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	80156
Grille Guard Kit, Stainless	80157
Short Grille Gaurd Kit, Stainless	85145
Headlamp Guard Kit, Stainless.....	80158
Light Bar Kit, Stainless.....	80148
Receiver Kit, Black.....	80149

'11-12 F-150 4WD ECOBOOST

Gen II Trans4mer	
Mounting Kit, Mid Frame, Black (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	87374
Grille Guard Kit, Black	80161
Short Grille Gaurd Kit, Black.....	85140
Headlamp Guard Kit, Black	80162
Light Bar Kit, Black	80143
Receiver Kit, Black.....	80149

Mounting Kit, Mid Frame, Stainless (Incl. Winch Carrier) (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	87376
Grille Guard Kit, Stainless	80157
Short Grille Gaurd Kit, Stainless.....	85145
Headlamp Guard Kit, Stainless.....	80158
Light Bar Kit, Stainless.....	80148
Receiver Kit, Black.....	80149

'06–08 F-150 4WD

Trans4mer Grille Guard, Black (requires 29394 winch carrier).....	75505
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	66405
Trans4mer Grille Guard, Stainless (requires 29394 winch carrier).....	75510
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Two-Bar Wrap Around).....	66404
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130

'04–05 F-150 4WD

Trans4mer Grille Guard, Black	76259
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	66405
Trans4mer Grille Guard, Stainless	76260
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Two-Bar Wrap Around).....	66404
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Receiver, Black only (use with Trans4mer only)	29397

Hidden Kit , includes special XD9000 short drum winch.....	69110
---	-------

Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver	68680

MOUNTING SYSTEMS
FOOTNOTES:

- (J) Must be revision #B0 for 9000 winch PN 27550 or 28500
- (K) Except models with far forward mounted stabilizer bar
- (V) 20'/6m Power Lead (PN 32963) or 24'/8m Power Lead (PN 32966) required for winching from rear
- (14) Must be Rev. B0 for '99–00 models
- (16) Fits Series 9 or 12 commercial winch with 12"/304.8mm wide foot print
- (17) Must be Rev. B0 for HS9000 winch PN 47550, 48500
- (19) Requires factory tow hooks or Adapter Kit PN 37174
- (23) Roller Fairlead Cover 35363 recommended
- (*) Cannot be used with winch carrier when winch is mounted

'03–04 EXPEDITION 4WD

Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver.....	69594

'99–03 F-150 & F-250 LIGHT DUTY 4WD ONLY, '99–02 EXPEDITION 4WD, '01–03 SUPER CREW 4WD

Trans4mer Grille Guard, Black	39680
Angled Light Bar, Black.....	73745
Brush Guards, Black (Two-Bar Wrap Around)	39900
Trans4mer Grille Guard, Stainless	63470
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Two-Bar Wrap Around).....	64705
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (M12, M8274-50)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Winch Carrier, Com'I Series 9 & 12 ⁽¹⁶⁾	60420

Semi-Hidden Mount (9.5cti, 9.5xp, XD9i, XD9, M8, VR 8, M6) ⁽¹⁴⁾⁽¹⁹⁾	34701
---	-------

Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver ⁽¹⁴⁾⁽¹⁹⁾	33088

'97–98 F-150 & F-250 LIGHT DUTY 4WD ONLY, EXPEDITION 4WD (REQUIRES FACTORY TOW HOOKS OR ADAPTER KIT SHOWN BELOW)

Trans4mer Grille Guard, Black	33086
Light Bar, Black ^(*)	29169
Brush Guards, Black (Non-Wrap Around)	33602
Receiver, Black only (use with Trans4mer only)	29166
Winch Carrier (VR10, XD9i, XD9, M8, VR8, M6) ^J	29165
Winch Carrier (VR12, 9.5cti, 9.5xp).....	39781
Winch Carrier (M8274-50).....	30040

Semi-Hidden Mount (9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6) ⁽¹⁷⁾⁽²³⁾	34701
--	-------

Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver.....	33088

Adapter Kit (use on vehicles without factory tow hooks)	37174
--	-------

'92–96 F-SERIES PICKUP 1/2, 3/4, 1 TON; BRONCO (INCLUDES COMMERCIAL F-350 & SUPER DUTY), '97 F-250 HEAVY DUTY & F-350

Trans4mer Grille Guard, Black	29757
Angled Light Bar, Black	73745
Brush Guards, Black (Non-Wrap Around)	29781
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Winch Carrier (M12, M8274-50)	62027
SST Stainless Steel Carrier Cover (for 62027 carrier)	63135
Winch Carrier, Com'I Series 9 & 12 ⁽¹⁶⁾	60420

Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver ^K	28070



MOUNTING SYSTEMS (CONTINUED)

MOUNTING SYSTEMS FOOTNOTES:

- (J) Must be revision #B0 for 9000 winch PN 27550 or 28500
- (V) 20'/6m Power Lead (PN 32963) or 24'/8m Power Lead (PN 32966) required for winching from rear
- (6) Front Receiver applications (does not fit diesels) '80-91 Pickup 1/2 Ton (2 & 4WD) and 3/4 Ton 2WD is PN 25862. '80-91 Pickup 3/4 Ton 4WD with leaf springs is PN 25852
- (25) Must be Revision B0 for 2001 and later models
- (*) Cannot be used with winch carrier when winch is mounted

4WD HUBS FOOTNOTES:

- B Will not fit '87-early '88 model vehicles, flange mount. (Dealer item only. See Ford parts & service)
- D Very early '90 vehicles with 23 tooth axle spline require 1989 model hubs
- E When replacing factory automatic hubs with manual hubs, you must also purchase Spindle Nut Conversion Kit #27988 for '83-89 vehicles; Conversion Kit #32720 for '90-97
- G Vehicles with full-time 4WD will require a transfer case conversion kit
- H When replacing automatic 3 hole cap screw hubs with manual hubs, you must purchase corresponding spindle nut conversion kit per application chart
- K Will not fit dual wheel application

4X FLARES FOOTNOTES:

- B Flares do not fit boxes for dual wheel axles

'87-91 F-SERIES PICKUP 1/2, 3/4, 1 TON; BRONCO	
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver.....	(6)
'80-86 F-SERIES PICKUP 1/2, 3/4, 1 TON; BRONCO	
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (PowerPlant HP) ^V	75330
Front Receiver.....	(6)
'98-03 RANGER 4WD	
Trans4mer Grille Guard, Black ⁽²⁵⁾	37133
Light Bar, Black ^(*)	29169
Brush Guards, Black (Non-Wrap Around)	30146
Receiver, Black only (use with Trans4mer only)	29166
Winch Carrier (VR10, XD9i, XD9, M8, VR8, M6) ^J	29165
Winch Carrier (9.5cti, 9.5xp)	39781

4WD HUBS	Year	Cautionary Footnotes	Spline Count	Standard Manual PN	Premium Manual PN	Spindle Nut Kit Std/Prem	Hub Service Kit	
							Std	Prem
Bronco II, Ranger	'83-89	E, D	23	29070		27988	39128	
Explorer	'90-94	D, E	27	29071		32720	39128	
Ranger	'90-97	E, D	27	29071		32720	39128	
Bronco	'66-96	B, G, H	19	9790	20990	32720	11967	20825
1/2 Ton Pickup	'59-96	B, G, H	19	9790	20990	32720	11967	20825
3/4 Ton Pickup	'59-75		19	9790	20990		11967	20825
3/4 Ton Pickup, Light Duty	'77½-97	H	19	9790	20990	32720	11967	20825
3/4 Ton Pickup, Heavy Duty	'63-77	G	19		9072			7302
3/4 Ton Pickup, Crew Cab only	'76-77½		19		29063			7302
3/4 Ton Pickup, Heavy Duty	'78-97	H	30	11690	38826	32721	11714	11714
1 Ton Pickup	'78-97	H	30	11690	38826	32721	11714	11714
Super Duty (F-250/350; Excursion)	'99-04	K	30	11690	38826		11714	11714
Courier, Ranger Int'l only	'99-01		26	61572				

4X FLARES	Year	PN	Year	PN
F-Series Pickup Front	'80-86	29878	F-250/350 Super-Duty Pickup Rear ^B	'99-10 37215
F-Series Pickup Rear	'80-86	29879	F-150 Pickup Front	'04-11 72990
F-Series Pickup Front	'87-91	26543	F-150 Pickup Rear	'04-11 72985
F-Series Pickup Rear ^B	'87-91	26733	F-Bronco Front	'80-86 29878
F-Series Pickup Front	'92-96	27808	F-Bronco Rear	'80-86 29879
F-Series Pickup Rear	'92-96	26733	F-Bronco Front	'87-91 26543
Flare Side Front	'94-96	27808	F-Bronco Rear	'87-91 26733
F-250/350 Heavy-Duty Pickup Front	'97	27808	F-Bronco Front	'92-96 27808
F-250/350 Heavy-Duty Pickup Rear ^B	'97	26733	F-Bronco Rear	'92-96 26733
F-250/350 Super-Duty Pickup Front	'08-10	75860	Ranger Front	'89-92 26553
F-250/350 Super-Duty Pickup Front	'99-07	37060	Ranger Rear	'89-92 26735

LIGHT BAR

H2 Hummer. Bolts to factory grille guard.
Will accommodate up to four Warn SDB160 lights.^(*)..... 68499

MULTI-MOUNT

9.5cti Multi-Mount Kit for the H2
(winch, carrier and wiring for front of vehicle)^V..... 85757

WARN WINCH BUMPER FOR THE H2 HUMMER

Bumper Kit for H2 Hummer
(requires winch PN 69502, sold separately)..... 69501
Winch for WARN Bumper for H2,
special 9.5xp configuration.....69502

LIGHT BAR NOTE:

(*) Will not work with WARN Winch Bumper for the H2 Hummer

MULTI-MOUNT NOTE

^V 20'/6m Power Lead (PN 32963) or 24'/8m (PN 32966)required for winching from rear

4WD HUBS	Year	Cautionary Footnotes	Spline Count	Standard Manual PN	Premium Manual PN	Spindle Nut Kit Std/Prem	Hub Service Kit	
							Std	Prem
Scout	'61-70		10		29062			7300
Scout II, Terra, Travelall	'71-80		27		9062			7300
1/2 Ton Pickup, Travelall	'68-75		19	9790	20990		11967	20825
1/2 Ton, 3/4 Ton Pickup	'56-72		19		9072			7302

4WD HUBS	Year	Cautionary Footnotes	Spline Count	Standard Manual PN	Premium Manual PN	Spindle Nut Kit Std/Prem	Hub Service Kit	
							Std	Prem
Trooper I	'83-86		24		61424			61692
Trooper II	'87-99		17		61385			61693
Rodeo	'91-99		17		61385			61693



MOUNTING SYSTEMS FOOTNOTES:

- (O) Will fit standard bumper and factory optional Jeep tube bumper
- (8) Hard Winch Cover not compatible with Grille Guard
- (9) Will not mount to Mopar accessory tube bumper
- (10) Not compatible with M8274-50 winch plate 21395
- (11) Requires winch plate 37170
- (12) Requires winch plate 13910 or 11310
- (13) Requires Rock Crawler front bumper 61856
- (14) Requires winch plate 87675
- (15) Not compatible with M8274-50 winch
- (V) 20'/6m Power Lead (PN 32963) or 24'/8m Power Lead (PN 32966) required for winching from rear

MOUNTING SYSTEMS/ FRONT BUMPERS

'07-12 JEEP WRANGLER JK (INCLUDES RUBICON,UNLIMITED, UNLIMITED RUBICON, 2 DOOR/4 DOOR; 2WD/4WD)

Rock Crawler Front Bumper	
Bumper only	
(order mounting plate below to mount winch, fits with factory lights)	74255

Rock Crawler Stubby Front Bumper	
Bumper with grille guard tube	
(includes mounting plate to mount PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6. Fits with factory lights)	87600

Rock Crawler Stubby Front Bumper	
Bumper without grille guard tube	
(includes mounting plate to mount PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6. Fits with factory lights)	87650
(order mounting plate below to mount M8274-50) ⁽¹⁴⁾	

Elite Series Front Bumper	
Bumper with grille guard tube	
(includes mounting plate to mount PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6. Fits with factory lights)	87750

Elite Series Front Bumper	
Bumper without grille guard tube	
(includes mounting plate to mount PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6. Fits with factory lights)	87755

Mounting Plate Kit for Rock Crawler front bumper	
(PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	74950

Mounting Plate Kit for Rock Crawler front bumper (M8274-50) ...	
74955	

Mounting Plate Kit for Rock Crawler Stubby front bumper without tube (M8274-50)	
87675	

Grille Guard Tube (requires 74255 WARN Rock Crawler front bumper; not compatible with 74955, 74247, 74249 winch plates).....	
74256	

Blocker Beam Skid Plate	
(requires 74255 WARN Rock Crawler front bumper)	74570

'07-11 JEEP WRANGLER JK (INCLUDES RUBICON,UNLIMITED, UNLIMITED RUBICON, 2 DOOR/4 DOOR; 2WD/4WD)

Mounting Plate Kit for factory front bumper	
(PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	74247

Mounting Plate Kit for factory front bumper (M8274-50)	
74249	

'97-06 WRANGLER TJ

Rock Crawler Stubby Front Bumper	
Bumper without grille guard tubes	
(includes mounting plate to mount PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6) ⁽¹⁵⁾	87700

Rock Crawler Front Bumper	
Bumper only (order mounting plate below to mount winch)	61853

Mounting Plate Kit for factory bumper or WARN Rock Crawler Bumper	
(PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6) ^(O)	37170
(M8274-50) ⁽⁹⁾	38671

Grille Guard Tube	
For factory front bumper ^{(8),(11)}	37171
For WARN Rock Crawler Bumper ^{(8),(11)}	61855

'87-96 WRANGLER YJ; '91 RENEGADE

Rock Crawler Front Bumper	
Bumper only (order mounting plate below to mount winch)	61856

Mounting Plate Kit for factory bumper or WARN Rock Crawler Bumper	
(PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	21390
(M8274-50)	21395

Grille Guard Tube	
For WARN Rock Crawler Bumper ^{(10),(13)}	61858

'76-86 CJ, SCRAMBLER

Rock Crawler Front Bumper	
Bumper only (order mounting plate below to mount winch)	61859

Mounting Plate Kit for factory bumper or WARN Rock Crawler bumper	
(PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6).....	13910
(M8274-50)	11310

Grille Guard Tube	
For WARN Rock Crawler Bumper ⁽¹²⁾	61861

'99-02 GRAND CHEROKEE

Multi-Mount Winch Frame (M6000) ^(V)	
Front Receiver (rated for use with the M6000 and M6000 SDP only)	61768

'97-01 CHEROKEE (WILL NOT FIT GRAND CHEROKEE, WILL NOT WORK WITH FACTORY TOW HOOKS)

Trans4mer Grille Guard, Black	
Brush Guards, Black (Non-Wrap Around)	39563
Winch Carrier (VR12, VR10, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Receiver, Black only (use with Trans4mer only)	29397

XJ Front Bumper & Winch Mount (with grille guard tubes)	
(Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	64535
Bumper Extension kit (required for above bumper).....	65852

XJ Front Bumper & Winch Mount (without grille guard tubes)	
(PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	64737
Bumper Extension kit (required for above bumper).....	65852

'84-96 WAGONEER, CHEROKEE, COMMANCHE (DOWN SIZE)

Trans4mer Grille Guard, Black	
Brush Guards, Black (Non-Wrap Around)	39563
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130

XJ Front Bumper & Winch Mount (with grille guard tubes)	
(Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	64535

XJ Front Bumper & Winch Mount (without grille guard tubes)	
(PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	64737

ROCK CRAWLER REAR BUMPERS

'07-12 JEEP WRANGLER JK (INCLUDES RUBICON,UNLIMITED, UNLIMITED RUBICON, 2 DOOR/4 DOOR; 2WD/4WD)

Rear Bumper —designed to accept tire carrier (sold separately)	
Tire Carrier (for use with PN 74300).....	74299

'97-06 TJ WRANGLER (INCLUDES RUBICON AND UNLIMITED)

Rear Bumper —will not accept tire carrier	
61854	
Rear Bumper —designed to accept tire carrier (sold separately)	
65508	
Tire carrier (for use with PN 65508)	64337

'87-96 YJ WRANGLER

Rear Bumper —will not accept tire carrier	
61857	
Rear Bumper —designed to accept tire carrier (sold separately)	
65509	
Tire carrier (for use with PN 65509)	64337

4X FLARES

	Year	Width	PN
Jeep CJ	'72-86	3½"	30754
Jeep YJ Wrangler	'87-96	7"	30203
Jeep TJ Wrangler.....	'97-06	7"	34699

Note: sold in complete sets of four.

ROCK CRAWLER FOOTNOTES:

- (30) Some vehicles may require additional spacers to fit bumper. Contact Warn Customer Service if needed.

'76-86 CJ7, CJ8

Rear Bumper —will not accept tire carrier	
61860	

Rear Bumper —designed to accept tire carrier	
(sold separately) ⁽³⁰⁾	62947
Tire carrier (for use with PN 62947)	63253

'84-96 XJ CHEROKEE

Rear Bumper —will not accept tire carrier	
65801	
Rear Bumper —designed to accept tire carrier (sold separately)	
65800	
Tire carrier (for use with PN 65800)	66355

'97-01 XJ CHEROKEE

Rear Bumper —will not accept tire carrier	
69251	
Rear Bumper —designed to accept tire carrier (sold separately)	
69250	
Tire carrier (for use with PN 69250)	66355

JEEP BODY ARMOR

	Year / Model	PN
Rock Sliders	'07-11 JK - 2 Door.....	74580
Rock Sliders	'07-11 JK - 4 Door.....	74575
Rock Sliders	'04-06 TJ Unlimited.....	69875
Rock Sliders	'03-06 TJ	71500
Rock Sliders	'97-02 TJ	63002
Rock Sliders	'87-96 YJ	63003
Rock Sliders	'76-86 CJ7.....	63004
Rock Sliders	'84-01 XJ	67930
Oil Pan Skid Plate ^A	'97-03 TJ (4-cylinder)	65152
Oil Pan Skid Plate ^A	'97-03 TJ (6-cylinder)	65020
Fuel Tank Skid Plate.....	'97-06 TJ	67820
Fuel Tank Skid Plate.....	'87-96 YJ	66550
Steering Box Skid Plate.....	'97-06 TJ	64250
Steering Box Skid Plate.....	'87-96 YJ	64650
Transfer Case Skid Plate ^B	'84-01 XJ	68930

	Year / Model	PN
Differential Skid Plate (Black).....	Dana 30	65443
Differential Skid Plate (Black)	Dana 35	65445
Differential Skid Plate (Black)	Dana 44	65447
Differential Skid Plate (Black)	Dana 60	65459
Differential Skid Plate (Black)	Ford 8.8.....	65637

JEEP BODY ARMOR FOOTNOTE:

- A Excludes Rubicon model
- B Fits vehicles equipped with NP231 transfer case only.

Jeep

JEEP HUBS FOOTNOTES:
A Very early vehicles may require that the threaded axle end be cut off
F Will not fit vehicles with factory optional chrome wheels
G Vehicles with full-time 4WD will require a transfer case conversion kit

4WD HUBS	Year	Cautionary Footnotes	Spline Count	Standard Manual PN	Premium Manual PN	Spindle Nut Kit Std/Prem	Hub Service Kit Std	Prem
CJ, Universal, M38A1, Willys	'71 & Prior	A	10		29062			7300
CJ, Universal (6 bolt)	'72–80	G	27		9062			7300
CJ, Universal Scrambler (5 bolt)	'81–86	F	27	28751				
Jeepster C101 Commando	'66–71		10		29062			7300
Jeepster C104	'72–73		27		9062			7300
Gladiator, Wagoneer, Pickup	'73 & Prior		10		29062			7300
Full size Wagoneer, Cherokee, J-10 Pickup, Commander	'74–91	G	19	9790	20990		11967	20825
J-20 Pickup (heavy axle)	'72–76		19		9072			7302
J-20 Pickup	'77–87		19	9790	20990		11967	20825
J4800 Pickup, Camper Spl	'69–74		10		6094			7302
Jeep Station Wagon, Pickup	'65 & Prior		10		29062			7300

Kia

4WD HUBS	Year	Cautionary Footnotes	Spline Count	Standard Manual PN	Premium Manual PN	Spindle Nut Kit Std/Prem	Hub Service Kit Std	Prem
Sportage, Retona	'95–02		26	60247				
Sportage, Retona	'95–02		26					Automatic Locking Hubs 61918

Land Rover

FRONT WINCH BUMPER

WARN Winch Bumper for the Defender 90/110, air conditioned and non air conditioned models. Winch sold separately.
(Fits: 9.5cti, 9.5xp, XD9i, XD9, M8, M6).....PN 69465

Mazda

4WD HUBS FOOTNOTES:
E When replacing factory automatic hubs with manual hubs, you must also purchase Spindle Nut Conversion Kit #27988 for '83–89 vehicles; Conversion Kit #32720 for '90–97

4WD HUBS	Year	Cautionary Footnotes	Spline Count	Standard Manual PN	Premium Manual PN	Spindle Nut Kit Std/Prem	Hub Service Kit Std	Prem
Pickup	'94–97	E	27	29071		32720	39128	
Navajo	'90–94	E	27	29071		32720	39128	
B Series, Fighter, Int'l only	'99–01		26	61572				

Nissan

4X FLARES

	Year	PN
4WD Pickup Front	'86½–97	26568
4WD Pickup Rear	'86½–97	26738

4WD HUBS

	Year	Cautionary Footnotes	Spline Count	Standard Manual PN	Premium Manual PN	Spindle Nut Kit Std/Prem	Hub Service Kit Std	Prem
Pickup	'84–86½	I	26		29087			29061
Pickup, Pathfinder	'86½–89	I	27		28739			29061
Pickup, 4 cylinder	'90–93	I	27		28739			29061
Pickup (incl. Frontier), 4 cyl	'94–01	I	28		29091			29061
Pickup (incl. Frontier), Pathfinder, 6 cyl	'90–01	I	28		29091			29061
Xterra	'00	I	28		29091			29061

4WD HUBS FOOTNOTES:
I Hub Set includes Stud Kit (PN 38003)

Suzuki

4WD HUBS

	Year	Cautionary Footnotes	Spline Count	Standard Manual PN	Premium Manual PN	Spindle Nut Kit Std/Prem	Hub Service Kit Std	Prem
Samurai, Sierra	'82–01	J	26		34581			7309
Sidekick, X-90, Vitara, Escudo	'89–01	J	26	39198	34581			7309

4WD HUBS FOOTNOTES:
J Not for front axle disconnect systems

Toyota

MOUNTING SYSTEMS AND BUMPERS

'10–11 FJ CRUISER

Front Off-Road Winch Bumper (accepts PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	85740
Rear Off-Road Bumper	73961

'06–09 FJ CRUISER

Front Off-Road Winch Bumper (accepts PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	73040
Rear Off-Road Bumper	73961

'07–11 TUNDRA 2WD & 4WD

Trans4mer Grille Guard, Black	76380
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	76378
Trans4mer Grille Guard, Stainless	76381
Angled Light Bar, Stainless	73753
Brush Guards, Stainless (Two-Bar Wrap Around)	76379
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130

'03–06 TUNDRA 2WD & 4WD

Trans4mer Grille Guard, Black ⁽³¹⁾	68505
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around) ^Z	68550
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130

'00–02 TUNDRA 2WD & 4WD

Trans4mer Grille Guard, Black	60097
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	39900
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130

Multi-Mount Winch Frame (for PowerPlant HP only) ^V	75330
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Front Receiver	60760

'05–11 TACOMA 4WD PICKUP

Trans4mer Grille Guard, Black	71250
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	71754
Receiver, Black only (use with Trans4mer only) ^G	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130

'01–04 TACOMA 4WD PICKUP

Trans4mer Grille Guard, Black	63065
Angled Light Bar, Black	73745
Brush Guards, Black (Two-Bar Wrap Around)	63062
Receiver, Black only (use with Trans4mer only) ^G	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130

'01–04 TACOMA 4WD PICKUP (CONTINUED)

Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (for PowerPlant HP only) ^V	75330
Front Receiver	63058

MOUNTING SYSTEMS FOOTNOTES:
(G) For Tacoma, 29397 must be revision #D0 (or later)
(V) 20'/6m Power Lead (PN 32963) or 24'/8m Power Lead (PN 32966) required for winching from rear
(Z) Brush guard not compatible with crew cab models
(31) Must be revision #B0 for Double Cab



Toyota

MOUNTING SYSTEMS
FOOTNOTES:

(G) For Tacoma, 29397 must be revision #DØ (or later)

(V) 20’/6m Power Lead (PN 32963) or 24’/8m Power Lead (PN 32966) required for winching from rear

(11) Must be revision #BØ

MOUNTING SYSTEMS (CONTINUED)

'98-00 TACOMA 4WD PICKUP, '98-00 PRERUNNER	
Trans4mer Grille Guard, Black	37172
Angled Light Bar, Black	73745
Brush Guards, Black (Non-Wrap Around)	37195
Receiver, Black only (use with Trans4mer only) ^G	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (for PowerPlant HP only) ^V	75330
Front Receiver ⁽¹¹⁾	33025

'95-97 TACOMA 4WD PICKUP	
Trans4mer Grille Guard, Black	32522
Angled Light Bar, Black	73745
Brush Guards, Black (Non-Wrap Around)	32525
Receiver, Black only (use with Trans4mer only) ^G	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (for PowerPlant HP only) ^V	75330
Front Receiver	33025

'93-98 T-100 4WD PICKUP	
Trans4mer Grille Guard, Black	29400
Angled Light Bar, Black	73745
Receiver, Black only (use with Trans4mer only)	29397
Winch Carrier (PowerPlant HP & HD, Endurance 12.0, VR12, VR10, 9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	29394
SST Stainless Steel Carrier Cover (for 29394 carrier)	63130
'92-95 4WD PICKUP, HILUX (EXCLUDES TACOMA)	
Rock Crawler Front Bumper (9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	68450
Grille Guard Tube (for bumper PN 68450)	68451
Rock Crawler Rear Bumper	68490
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (for PowerPlant HP only)	75330
Front Receiver	25873

'89-91 4WD PICKUP, HILUX	
Rock Crawler Front Bumper (9.5cti, 9.5xp, XD9i, XD9, M8, VR8, M6)	68450
Grille Guard Tube (for bumper PN 68450)	68451
Rock Crawler Rear Bumper	68490
'86-89 4-RUNNER; '86-88 4WD PICKUP, HILUX	
Multi-Mount Winch Frame (9.5xp, XD9i, XD9, M8, VR8, M6) ^V	26370
Multi-Mount Winch Frame (for PowerPlant HP only) ^V	75330
Frame Front Receiver	25873

4WD HUBS	Year	Cautionary Footnotes	Spline Count	Standard Manual PN	Premium Manual PN	Spindle Nut Kit Std/Prem	Hub Service Kit Std	Prem
Pickup, Hilux, 4-Runner, with ADD	'86-95	^C	26		28761	29918		7309
Landcruiser	'63-75		6		28781			7309
Landcruiser	'76-87	^C	30		28771	29918		7309
Pickup, Hilux, 4-Runner	'76-85	^C	30		28771	29918		7309
T100	'93-99	^C	26		28761	29918		7309
T100, W/ADD	'93-99		26		28761	29918		7309
Van, Previa	'86-92	^C	26		28761	29918		7309
Tacoma (w/factory man.hubs)	'95-01		26		60459			7309
Hilux Int'l with Torsion bar susp	'98-01	^C			28761	29918		7309

4X FLARES	Year	PN
4WD Pickup Front	'84-88	29872
4WD Pickup Rear	'84-88	29873
4WD Pickup Front	'89-94	26563
4WD Pickup Rear	'89-94	26737
Tacoma, 4x4, Front	'95-02	32950
Tacoma, 4x4, Rear	'95-02	32951
Dual Cab Hilux Front	'89-95	26563
Dual Cab Hilux Front	'98-00	39030
Dual Cab Hilux Rear	'98-00	39015

4WD HUBS
FOOTNOTES:

^C When replacing factory automatic hubs with manual hubs, you must also purchase Spindle Nut Conversion Kit #29918 (except for ADD)

OREGON’S OUTBACK COUNTRY. You want authentic? You got it. That’s a Warn Industries director of engineering, regional sales manager, trade show rep, and product engineer.

POWERSPORTS PRODUCT APPLICATIONS
BY VEHICLE MAKE AND MODEL

Application listing is current as of September 2011. Warn Industries is constantly developing new applications. If you can’t find your vehicle listed here, call WARN customer service for the latest applications. In North America call 1-800-543-9276. Customers outside of North America can call 1-503-722-3008. Or check our web site: www.warn.com

CONTENTS:

Arctic Cat	132, 133,138	Kymco	135
Can-Am/Bombardier	134, 139	Polaris	136, 137, 140
Honda	134, 139	Suzuki	137, 141
Kawasaki	135, 140	Yamaha	138, 141
Kubota	135		



FOOTNOTES:
U. Fits RT/XT 15 series winches only
AA. Factory installed winch
AC. Factory installed mount
AQ. Compatible with 78100 (ProVantage) and 86528 (Standard) plow bases
AR. Compatible with appropriate 92100 (ProVantage) or 79805 (ProVantage) plow bases
AS. Not compatible with 2.5ci or A2000 Winches

Winch and Plow Mounting Kits

APPLICATION	YEAR	WINCH MOUNTING KIT	CENTER PLOW MOUNTING KITSAQ	FRONT PLOW MOUNTING KITSAR,AS
250 2X4	99-01	.60927		
250 4X4	2001	.60927		
250 2X4, 4X4	02-05	.62840		
250 2X4	06-09	.NoteAC,U		
300 2X4	2010	.NoteAC		
300 2X4	02-03	.62840		
300 2X4, 4X4	98-01	.60927		
300 2X4, 4X4	02-05	.62840		
366 4X4 Automatic	08-11	.NoteAC	.85260	
375 Automatic 2X4, 4X4	2002	.62840	.63294	.84354
400 2X4, 4X4	98-01	.60927	.37853	
400 2X4	03-04	.62840	.63294	.84354
400 4X4	03-08	.62840	.63294	.84354
400 4X4	2002	.62840	.63294	
400 Automatic 2X4	03-04	.62840	.63294	.84354
400 Automatic 4X4	03-08	.62840	.63294	.84354
400 Automatic ACT 4X4	03-04	.62840	.63294	.84354
400 Automatic LE 4X4	05-07	.NoteAA	.63294	.84354
400 / 500 Automatic MRP 4X4	2003	.62840	.63294	.84354
400 Automatic TBX 4X4	05-06	.NoteAC	.63294	.84354
400 Automatic TBX 4X4	2004	.62840	.63294	.84354
400 HI TRV 4X4	2010	.NoteAC		
400 Automatic TRV 4X4	07-09	.NoteAC	.63294	.84354
400 Automatic TRV 4X4	2006	.NoteAC		
400 VP 4X4	2006	.NoteAC	.63294	.84354
400 Automatic VP 4X4	2006	.NoteAC		
400 VP 4X4, Automatic VP 4X4	2005	.62840	.63294	.84354
400i 2X4, 4X4	2002	.62840	.63294	.84354
450 4X4, 450 LTD 4X4, 450 TRV 4X4	2011		.63294	.84354
500 4X4	98-01	.35048	.37853	
500 Automatic 4X4	00-01	.35048	.60940	
500 4X4, Automatic 4X4	02-04	.62840	.63294	.84354
500 4X4	05-09	.NoteAC	.63294	.84354
500 Automatic 4X4	05-08	.NoteAC	.63294	.84354
500 Automatic LE 4X4	05-06	.NoteAC	.63294	.84354
500 Automatic M4 4X4	2008	.NoteAC	.63294	.84354
500 Automatic TBX 4X4	05-06	.NoteAC	.63294	.84354
500 Automatic TBX 4X4	02-04	.62840	.63294	.84354
500 Automatic TRV 4X4	04-08	.62840	.63294	.84354
500i Automatic 4X4	2002	.62840	.63294	.84354
500 HI EFI 4X4	2009	.NoteAC	.63294	.84354
550 HI 4X4, HI LE 4X4	09-11	.NoteAC	.63294	.84354
550 HI TRV 4X4, HI TRV LE 4X4	2009	.NoteAC		.84354
550 LTD 4X4, 550 S 4X4, 550 (Cruiser) TRV (GT) 4x4	2011		.63294	.84354
650 4X4, LE 4X4	2005	.NoteAC	.63294	.84354
650 4X4	2004	.62840	.63294	.84354
650 HI 4X4	05-11	.NoteAC	.63294	.84354
650 HI TRV 4X4	08-09	.NoteAC	.63294	.84354
650 HI LE 4X4	2007	.NoteAA	.63294	.84354
650 V2 4X4	05-06	.NoteAC	.63294	.84354
650 V2 LE 4X4	2005	.NoteAA	.63294	.84354
650 V2 LE TS 4X4	2006	.NoteAA	.63294	.84354
650 TBX 4X4	2009	.NoteAA	.63294	.84354
650 TBX HI 4X4	2007	.NoteAA	.63294	.84354
700 Diesel 4X4	2008	.NoteAA	.63294	.84354
700 EFI 4X4, EFI M4 4X4, LE 4X4	2008	.NoteAC	.63294	.84354
700 EFI 4X4, EFI LE 4X4	2007	.NoteAC	.63294	.84354
700 HI 4X4, LE 4X4, HITRV 4X4, LE TRV 4X4	09-11	.NoteAC	.63294	.84354
700 HI TBX 4X4	2010	.NoteAC		
700 HI EFI SE 4X4	08-09	.NoteAC	.63294	.84354
700 HI Cruiser TRV 4X4	10-11	.NoteAC	.63294	.84354
700 (TBX) LTD 4X4, 700 S 4X4, 700 Super Duty Diese 4x4	2011		.63294	.84354
1000 H2 TRV 4X4	09-10	.NoteAC	.63294	.84354
1000 H2 Cruiser TRV 4X4	2010	.NoteAA	.63294	.84354
Bear Cat 454 4X4	96-98	.35048	.37853	

FOOTNOTES:
AA. Factory installed winch
AC. Factory installed mount
AQ. Compatible with 78100 (ProVantage) and 86528 (Standard) plow bases
AR. Compatible with appropriate 92100 (ProVantage) or 79805 (ProVantage) plow bases
AS. Not compatible with 2.5ci or A2000 Winches

Winch and Plow Mounting Kits (continued)

APPLICATION	YEAR	WINCH MOUNTING KIT	CENTER PLOW MOUNTING KITSAQ	FRONT PLOW MOUNTING KITSAR,AS
MudPro 1000 H2 EFI 4X4	2010	.NoteAA		
MudPro 1000 4X4	2011		.63294	
MudPro 650 HI 4X4	2010	.NoteAC		
MudPro 700 HI EFI 4X4	09-10	.NoteAA	.63294	
MudPro 700 4X4	2011		.63294	.84354
Super Duty Diesel 4X4	2010	.NoteAC		
Thundercat 1000 H2 4X4	09-10	.NoteAC	.80582	.84354
Thundercat 1000 H2 LE 4X4	2010	.NoteAA	.80582	.84354
Thundercat Automatic SE 4X4	2008	.NoteAC	.80582	.84354
TRV 1000 Cruiser 4X4	2011		.63294	.84354
Prowler 550 XT 4X4	09-10	.NoteAC		
Prowler 650 HI XT 4X4	08-09	.NoteAC		.83875
Prowler 650 HI XT 4X4	06-07	.NoteAA		
Prowler 700 XT 4X4	2009	.NoteAC		.83875
Prowler 700 XTX 4X4	09-10	.NoteAC		.83875
Prowler 700 XTX LE 4X4	08-09	.NoteAC		.83875
Prowler 1000 XTZ 4X4	09-10	.NoteAC		

Winch and Plow Mounting Kits

APPLICATION	YEAR	WINCH MOUNTING KIT	CENTER PLOW MOUNTING KITSAQ	FRONT PLOW MOUNTING KITSAR,AS
Outlander 330 2X4, 4X4	03-05	.66288	.67945	
Outlander 330 MAX 4X4	2005	.66288	.67945	
Outlander 400 2X4	03-04	.66288	.67945	
Outlander 400 4X4 (XT) (MAX XT)	03-04	.66288	.67945	
Outlander 400 4X4, MAX 4X4	03-mid 06	.66288	.67945	
Outlander 400 4X4, MAX 4X4	mid 06-late 06	.66288	.72504	.79234
Outlander 400 XT 4X4, MAX XT	05-mid 06	.NoteAA	.67945	
Outlander 400 XT 4X4, MAX XT	mid 06-08	.NoteAA	.72504	.79234
Outlander 400 4X4, (MAX) (XT)	07-11	.71881	.72504	.79234
Outlander 500 4X4, MAX 4X4	07-08	.71881	.72504	.79234
Outlander 500 4X4 XT (MAX XT)	07-11	.NoteAA	.72504	.79234
Outlander 500 MAX LTD 4X4	2010	.NoteAA	.72504	.79234
Outlander 650 XT 4X4, MAX XT 4X4	06-07	.71881	.72504	.79234
Outlander 650 4X4, MAX 4X4	06-11	.71881	.72504	.79234
Outlander 650 XT 4X4, MAX XT 4X4	08-11	.NoteAA	.72504	.79234
Outlander 650 MAX XT-P 4X4	2011		.72504	.79234
Outlander 800 4X4, MAX 4X4	06-08	.71881	.72504	.79234
Outlander 800 4X4 (R) (MAX) (XT) (MR) (XT-P) (LTD)	06-11	.71881	.72504	.79234
Outlander 800 4X4 (MAX) (XT) (X) (XT-P) (MR)	08-11	.NoteAA	.72504	.79234
Quest 500 4X4, 650 4X4, 650XT 4X4	01-04	.65563N	.65179	
Quest 500 XL 4X4, 650 XL 4X4	2002	.65563N	.65179	
Quest 650 MAX 4X4	2004	.65563N	.65179	
Traxter 2X4	01-03	.65563N	.65179	
Traxter 4X4	99-04	.65563N	.65179	
Traxter 500 Automatic 4X4, Automatic CVT 4X4	2005	.65563N	.65179	
Traxter 500 Automatic XT 4X4	2005	.NoteAA	.65179	
Traxter 650 Automatic CVT 4X4	2005	.65563N	.65179	
Traxter 650 Automatic CVT XT 4X4	2005	.NoteAA	.65179	
Traxter MAX 4X4	03-04	.65563N	.65179	
Traxter MAX 500 Automatic 4X4	2005	.65563N	.65179	
Traxter MAX 500 Automatic XT 4X4	2005	.NoteAA	.65179	
Traxter MAX 650 Automatic CVT 4X4	2005	.65563N	.65179	
Traxter MAX 650 Automatic CVT XT 4X4	2005	.NoteAA	.65179	
Traxter XL 4X4	01-04	.65563N	.65179	
Traxter XL 500 4X4	2005	.65563N	.65179	
Traxter XT 4X4	00-04	.65563N	.65179	
Commander 800 (R) (XT)	2011	.85810		.85690
Commander 1000 (X) (XT)	2011	.85810		.85690

FOOTNOTES:
N. Fits RT/XT 25 & 30 series winches only
AA. Factory installed winch
AQ. Compatible with 78100 (ProVantage) and 86528 (Standard) plow bases
AR. Compatible with appropriate 92100 (ProVantage) or 79805 (ProVantage) plow bases
AS. Not compatible with 2.5ci or A2000 Winches



Honda

- FOOTNOTES:
- U. Fits RT/XT 15 series winches only AN. Fits 25 & 30 RT/XT series winches only
- AN. Fits 25 & 30 RT/XT series winches only
- AQ. Compatible with 78100 (ProVantage) and 86528 (Standard) plow bases
- AR. Compatible with appropriate 92100 (ProVantage) or 79805 (ProVantage) plow bases
- AS. Not compatible with 2.5ci or A2000 Winches

Winch and Plow Mounting Kits

APPLICATION	YEAR	WINCH MOUNTING KIT	CENTER PLOW MOUNTING KITS ^{AQ}	FRONT PLOW MOUNTING KITS ^{AR,AS}
300 (TRX300FW) 4X4	90-92	28878		
300 (TRX300FW) 4X4	93-00		37850	
Foreman (TRX400FW) 4X4	95-03	60174	37851	
Foreman S (TRX450S) 4x4, (TRX450FM) 4X4	98-04	60174	37852	
Foreman ES (TRX450ES) 4x4, (TRX450FE) 4X4	98-04	60174	37852	
Foreman (TRX500TM) 2X4	05-06	70830	70583	
Foreman (TRX500TM) 2X4	07-11	84705	70583	
Foreman (TRX500FM) 4X4	05-06	70830	70583	
Foreman (TRX500FM) 4X4	07-11	84705	70583	80554
Foreman (TRX500FPM) 4X4	07-11	84705	70583	80554
Foreman ES (TRX500FE) 4X4	05-06	70830	70583	
Foreman ES (TRX500FE) 4X4	07-11	84705	70583	80554
Foreman ES (TRX500FPE) 4x4	08-11	84705	70583	80554
Foreman TRX500 (FE) (FM) (FPE) (FPM) 4x4	2012	87180	87686	87190
Rancher (TRX350TM) 2X4	00-06	68852		
Rancher (TRX350FM) 4X4	00-06	68852	63290	
Rancher ES (TRX350TE) 2X4	00-06	68852		
Rancher ES (TRX350FE) 4X4	00-06	68852	63290	
Rancher (TRX420TM) 2X4, ES (TRX420TE) 2X4	07-11	84704 ^{AN}	75785	
Rancher (TRX420FM) 4X4, ES (TRX420FE) 4x4	07-11	84704 ^{AN}	75785	80031
Rancher ES (TRX420FPM) 4X4, (TRX420FPE) 4X4	09-11	84704 ^{AN}	75785	80031
Rancher AT (TRX400FA) 4X4, (TRX400FG) 4x4	04-07	68852	63290	80031
Rancher AT (TRX420FA), AT EPS (TRX420FPA)	09-12	84704 ^{AN}	75785	80031
Rancher AT GPScape (TRX400FGA) 4X4	2007	68852	63290	80031
Recon (TRX250TM) 2X4	97-04	37209 ^U		
Recon (TRX250TM) 2x4	05-09	79840 ^U		
Recon ES (TRX250TE) 2X4	03-04	37209 ^U		
Recon ES (TRX250TE) (TM) 2X4	05-11	79840 ^U		
Rincon (TRX650FA) 4X4, (TRX680FA) 4X4	03-06	84706	65070	79673
Rincon GPScape (TRX680FGA) 4X4	07-12	84706	65070	79673
Rubicon (TRX500FA) 4X4	00-04	84706	61611	
Rubicon (TRX500FA) 4X4, (TRX500FG) 4x4	05-06	70830	70583	
Rubicon (TRX500FA) 4X4, (TRX500FG) 4x4	07-12	84705	70583	80554
Rubicon GPScape (TRX500FGA) 4X4	2008	84705	70583	80554
Rubicon GPScape (TRX500FGA) 4X4	2007	84705	70583	
Rubicon GPScape EPS (TRX500FPA) 4X4	2009	84705	70583	80554
Big Red (MUV700)	08-11	83405		80913

Kawasaki

- FOOTNOTES:
- M. May not fit 3.0 series or 25 & 30 RT/XT series winches. Mount modification may be required
- U. Fits RT/XT 15 series winches only
- AI. Must be revision A2 for "I" series model
- AO. Does not work with UML
- AQ. Compatible with 78100 (ProVantage) and 86528 (Standard) plow bases
- AR. Compatible with appropriate 92100 (ProVantage) or 79805 (ProVantage) plow bases
- AS. Not compatible with 2.5ci or A2000 Winches
- AV. Not compatible with body armor

Winch and Plow Mounting Kits

APPLICATION	YEAR	WINCH MOUNTING KIT	CENTER PLOW MOUNTING KITS ^{AQ}	FRONT PLOW MOUNTING KITS ^{AR,AS}
Bayou 220 2X4	89-02	61640 ^M		
Bayou 250 2X4	03-06	69892 ^U		
Bayou 300 4X4	89-02	28880 ^M	37847	
Bayou 400 4X4	93-99		37848	
Brute Force 650 4X4	05-06	70825	62686	81922
Brute Force 650 4X4	07-11	70825	62686	81922
Brute Force 650 4X4i	05-11	70825 ^{AI}	70558 ^{AO}	82530 ^{AV}
Brute Force 750 4X4i	05-07	70207	70558	82530 ^{AV}
Brute Force 750 (EPS) 4X4i	08-12	70207	70558 ^{AO}	80360
Prairie 300 2X4	99-02	39308	37838	
Prairie 300 4X4	99-02	39308	37838	
Prairie 360 2X4, 4X4	02-11	63801	62686	80556
Prairie 400 2X4	97-02		37838	
Prairie 400 4X4	97-98		37838	
Prairie 400 4X4	99-02	39555	37838	
Prairie 650 Twin 4X4	01-03		62686	
Prairie 700 4X4	04-06		62686	

Kawasaki

- FOOTNOTES:
- N. Fits RT/XT 25 & 30 series winches only
- AJ. Fits 4.0ci and 40 series winches only
- AK. Does not fit trans 4x4 diesel
- AQ. Compatible with 78100 (ProVantage) and 86528 (Standard) plow bases
- AR. Compatible with appropriate 92100 (ProVantage) or 79805 (ProVantage) plow bases
- AS. Not compatible with 2.5ci or A2000 Winches
- AU. Must use appropriate ATV blade and base/ tube assembly
- AX. When using in conjunction with Front Plow Mount, must use RT/XT 40 winch

Kubota

- FOOTNOTES:
- AQ. Compatible with 78100 (ProVantage) and 86528 (Standard) plow bases
- AR. Compatible with appropriate 92100 (ProVantage) or 79805 (ProVantage) plow bases
- AS. Not compatible with 2.5ci or A2000 Winches
- AU. Must use appropriate ATV blade and base/ tube assembly

Kymco

- FOOTNOTES:
- U. Fits RT/XT 15 series winches only.
- T. Factory mount fits RT/XT 25 & 30 series winches only U. Fits RT/XT 15 series winches only
- AQ. Compatible with 78100 (ProVantage) and 86528 (Standard) plow bases
- AR. Compatible with appropriate 92100 (ProVantage) or 79805 (ProVantage) plow bases
- AS. Not compatible with 2.5ci or A2000 Winches

Winch and Plow Mounting Kits (continued)

APPLICATION	YEAR	WINCH MOUNTING KIT	CENTER PLOW MOUNTING KITS ^{AQ}	FRONT PLOW MOUNTING KITS ^{AR,AS}
Mule 600 2x4, 610 4X4	08-11	84155 ^N		84090 ^{AU}
Mule 610 4x4	05-07	84155 ^N		
Mule 610 (XC) 4x4	08-11	84155 ^N		84090 ^{AU}
Mule 2500 4X4	00-02	60974		
Mule 3000 2X4	02-09	74186 ^{AJ, AK}		
Mule 3010 4X4	02-09	74186 ^{AJ, AK}		
Mule 4000 2X4	2010	80586		
Mule 4010 4X4, Trans 4X4	09-11	80586		83503
Mule 4010 Diesel 4X4, Diesel Trans 4X4	09-10	80586		83503
Teryx 750 4x4	08-11	83870 ^{AX}		79925
Teryx 750 LE (Camo) 4x4	08-11	83870 ^{AX}		79925
Teryx 750 Sport 4x4	09-11	83870 ^{AX}		79925

Winch and Plow Mounting Kits

APPLICATION	YEAR	WINCH MOUNTING KIT	CENTER PLOW MOUNTING KITS ^{AQ}	FRONT PLOW MOUNTING KITS ^{AR,AS}
RTV500 4x4	09-11	82001		83650 ^{AU}
RTV 900 4X4	05-11	70555		
RTV 1100 4X4	06-11	79900		
RTV 1140 4X4	2009	84034		
RTV 1140 CPX 4X4	10-11	84034		

Winch and Plow Mounting Kits

APPLICATION	YEAR	WINCH MOUNTING KIT	CENTER PLOW MOUNTING KITS ^{AQ}	FRONT PLOW MOUNTING KITS ^{AR,AS}
MXU 375 IRS 4X4	09-10		84820	84804
MXU 250, 300, 350 4x4	05-06	72008 ^U		
MXU 500 4x4	2010	Note ^T	86680	86142
UXV500	2009	Note ^T		
UXV500	2010	Note ^T		86386



FOOTNOTES:
K. Not compatible with 3.0 series or 25 & 30 RT/XT series winches
S. Combination Winch Mount and Bumper
AB. Rear Mount
AL. Kit must be revision B2 for mid-05 and later
AQ. Compatible with 78100 (ProVantage) and 86528 (Standard) plow bases
AR. Compatible with appropriate 92100 (ProVantage) or 79805 (ProVantage) plow bases
AS. Not compatible with 2.5ci or A2000 Winches

Winch and Plow Mounting Kits

APPLICATION	YEAR	WINCH MOUNTING KIT	CENTER PLOW MOUNTING KITS ^{AQ}	FRONT PLOW MOUNTING KITS ^{AR,AS}
ATP 330 4X4	04-05	34901	64580	
ATP 500 H.O. 4X4	04-05	34901	64580	
Big Boss 400L 6X6	93-99		37844	
Diesel 4X4	98-02	34901		
Hawkeye 300 4X4	07-08	85104		
Magnum 325 4X4	00-01	34901	39609	
Magnum 325 4X4	2002	34901	64580	
Magnum 330 4X4	03-06	34901	64580	
Magnum 425 4X4	93-98		37845	
Magnum 425 6X6	93-97		37845	
Magnum 500 4X4	99-01	34901	39609	
Magnum 500 4X4	2002	34901	64580	
Magnum 500 RMK 2X4	2002	34901		
PTV 4X4, 6X6	02-03	34901		
Scrambler 400 2X4	00-03	60891 ^{K,AB}		
Scrambler 400 4X4	99-00	60891 ^{K,AB}		
Scrambler 500 2X4	01-06	60891 ^{K,AB}		
Scrambler 500 4X4	99-05	60891 ^{K,AB}		
Sportsman 300, 400 4x4	08-10	85104	79018	83170
Sportsman 335 4X4	98-00	34901	37843 ^{AL}	
Sportsman 400 4X4	96-97		37845	
Sportsman 400 4X4	01-03	34901	37843 ^{AL}	
Sportsman 400 4X4	04-04-1/2	68573 ^S	37843 ^{AL}	
Sportsman 400 4X4	04-1/2-07	73680	37843 ^{AL}	
Sportsman 400 4X4	2011	87714	87355	87758
Sportsman 450 4X4	2006	73680		
Sportsman 500 4X4	96-03	34901	37843 ^{AL}	
Sportsman 500 4X4	04-04-1/2	68573 ^S	37843 ^{AL}	
Sportsman 500 4X4	04-1/2-07	73680	37843 ^{AL}	83110
Sportsman 500 4X4	08-10	73680		83110
Sportsman 500 4X4	2011	87714	87355	87758
Sportsman 500 DUSE 4X4, RSE 4X4	01-02		37843 ^{AL}	
Sportsman 500 Touring 4X4	09-10	73680	78395	83110
Sportsman 500 Remington 4X4	2000		37843 ^{AL}	
Sportsman 500 X2 4X4	07-09	73680	78395	83110
Sportsman 550 4X4, EPS 4X4	10-11	83408	80260	80545
Sportsman 550 Touring EPS 4X4	2010	83408	80260	80545
Sportsman 550 XP 4X4	2010	83408	80260	80545
Sportsman 550 XP EPS 4X4	09-11	83408	80260	80545
Sportsman 550 X2 4X4	10-11	83408		80545
Sportsman 600 Twin 4X4	2003	63799	63936	
Sportsman 600 Twin 4X4	04-04-1/2	68573 ^S	63936	
Sportsman 600 Twin 4X4	04-1/2-05	73680	63936	
Sportsman 700 Twin 4X4	02-03	63799	63936	
Sportsman 700 Twin 4X4	04-04-1/2	68573 ^S	63936	
Sportsman 700 Twin 4X4	04-1/2-06	73680	63936	
Sportsman 700 Twin 4X4	07-08	73680		79608
Sportsman 700 X2 4X4	2008	73680	78395	
Sportsman 800 4X4	09-10	73680	63936	79608
Sportsman 800 4X4	2008	73680		79608
Sportsman 800 4X4	2007	73680		
Sportsman 800 4X4	05-06		63936	
Sportsman 800 4X4	2011	87714	87355	87758
Sportsman 800 X2 4X4	2009		78395	
Sportsman 800 X2 4X4	07-08	73680		
Sportsman 800 Touring 4X4	08-09	73680	78395	
Sportsman 800 Big Boss 6X6	2010			79608
Sportsman 800 Big Boss 6X6	2009	73680		79608
Sportsman 850 Touring EPS 4X4	10-11	73680		80545
Sportsman 850 XP 4X4	09-11	83408	80260	80545
Sportsman 850 XP EPS 4X4	09-11	83408	80260	80545
Sportsman 6X6	99-08	34901		

Winch and Plow Mounting Kits (continued)

APPLICATION	YEAR	WINCH MOUNTING KIT	CENTER PLOW MOUNTING KITS ^{AQ}	FRONT PLOW MOUNTING KITS ^{AR,AS}
Sportsman MV 4X4	2005	Note ^{AA}		
Sportsman MV7 4X4	2006	Note ^{AA}		
Xpedition 325 4X4	01-02	34901		
Xpedition 425 4X4	00-03	34901	39609	
Xplorer 300, 400 4X4	97-98	34901	37846	
Xplorer 300 4X4	1999	34901	39608	
Xplorer 400 4X4	99-02	34901	39608	
Xplorer 400 4X4	1996	34901		
Xpress 400 / Xplorer 500 4X4	1997	34901		
Ranger 500 4X4	09-10	80371		79700
Ranger 500 4X4	2008	80368		81580
Ranger 6X6	02-06			81580
Ranger 6x6	98-01	38914		
Ranger 700 4X4	2008	80368		81580
Ranger 700 4X4	05-07			81580
Ranger 700 Crew 4X4	2009	80368		
Ranger 700 HD 4X4	2009	80371		79700
Ranger 700 XP 4X4	2009	80371		79700
Ranger 700 XP 4X4	2008	80368		81580
Ranger 700 6X6	08-09	80368		81580
Ranger 700 6X6	2007			81580
Ranger 800 XP 4X4, XP EPS 4X4, XP Browning 4X4	10-11	80371		79700
Ranger 800 Crew 4X4, HD 4X4	10-11	80371		79700
Ranger 800 6X6	10-11	80371		79700
Ranger 800 RZR 4X4	08-11	80335 ^{AN}		80681 ^{AU}
Ranger 800 RZR-S 4X4	10-11	80335 ^{AN}		80681 ^{AU}
Ranger 800 RZR-S 4X4	2009			80681 ^{AU}
Ranger Diesel 4X4	2011	80371		
Ranger HD 800 EPS 4X4	2011	80371		
Ranger RZR 4 800 EPS 4X4	2011	80335 ^{AN}		
Ranger RZR 900 4X4	2011	87722 ^{AN,S}		

FOOTNOTES:
S. Combination Winch Mount and Bumper
AA. Factory installed winch
AN. Fits 25 & 30 RT/XT series winches only
AQ. Compatible with 78100 (ProVantage) and 86528 (Standard) plow bases
AR. Compatible with appropriate 92100 (ProVantage) or 79805 (ProVantage) plow bases
AS. Not compatible with 2.5ci or A2000 Winches
AU. Must use appropriate ATV blade and base/tube assembly

FOOTNOTES:
L. This kit requires using a WARN ProVantage plow lift to raise plow
M. May not fit 3.0 series or 25 & 30 RT/XT series winches. Mount modification may be required
T. Factory mount fits RT/XT 25 & 30 series winches only
AQ. Compatible with 78100 (ProVantage) and 86528 (Standard) plow bases
AR. Compatible with appropriate 92100 (ProVantage) or 79805 (ProVantage) plow bases
AS. Not compatible with 2.5ci or A2000 Winches

Winch and Plow Mounting Kits

APPLICATION	YEAR	WINCH MOUNTING KIT	CENTER PLOW MOUNTING KITS ^{AQ}	FRONT PLOW MOUNTING KITS ^{AR,AS}
Eiger 400 (LT-A400) 2X4, (LT-F400) 2X4	02-04	63796	63840	
Eiger 400 (LT-A400F) 4X4, (LT-F400F) 4X4	02-06	63796	63840	
King Quad 300 (LT-F300F) 4X4	93-01		37842 ^L	
King Quad 300 (LT-F300F) 4X4	02-03		37842 ^L	
King Quad 400 AS, FS 4x4	2008	80560	63840	80566
King Quad 400 AS, FS 4x4	09-10	83130	63840	80566
King Quad 400 (Asi) (FSi) (Camo) 4x4	2011	83130	63840	80566
King Quad 450 4X4	07-08	70326	70737	80558
King Quad 450 AXi PS 4X4	09-10	70326	70737	80558
King Quad 500 AXi (PS) (Camo) 4X4	09-11	70326	70737	80558
King Quad 700 4X4	05-07	70326	70737	80558
King Quad 750 AXi 4X4	08-09	70326	70737	80558
King Quad 750 AXi (PS) (Camo) 4X4	2011	70326	70737	80558
Quad Master 500 (LT-A500F) 4X4	1999	37812		
Quad Master 500 (LT-A500F) 4X4	00-01	37812	37802	
Quad Runner 250 (LT-F250) 2X4, (LT-F250F) 4X4	92-98	30476 ^M		
Quad Racer R450 (LT-R450) 2X4	2008	70326		
Quad Racer R450 (LT-R450) 2X4	2007	70326		
Quad Runner 500 (LT-F500F) 4X4	98-03	37812	37802	
Twin Peaks 700 4X4	04-05		62686	
Vinson 500 (LT-A500F) 4X4	02-06	63811	65400	
Vinson 500 (LT-F500F) 4X4	03-05	63811	65400	
QUV 4x4	2005	Note ^T		



FOOTNOTES:

M. May not fit 3.0 series or 25 & 30 RT/XT series winches. Mount modification may be required

S. Combination Winch Mount and Bumper

U. Fits RT/XT 15 series winches only

Y. Not Compatible with Manual Plow Lift

AN. Fits 25 & 30 RT/XT series winches only

AQ. Compatible with 78100 (ProVantage) and 86528 (Standard) plow bases

AR. Compatible with appropriate 92100 (ProVantage) or 79805 (ProVantage) plow bases

AS. Not compatible with 2.5ci or A2000 Winches

Winch and Plow Mounting Kits

APPLICATION	YEAR	WINCH MOUNTING KIT	CENTER PLOW MOUNTING KITS ^{AQ}	FRONT PLOW MOUNTING KITS ^{AR,AS}
Beartracker 2X4.....	98-04	39439		
Big Bear 350 2X4, 4X4.....	87-96	28876 ^M		
Big Bear 350 2X4.....	97-98	28876 ^M	37839	
Big Bear 350 2X4.....	1999	35274 ^M	37839	
Big Bear 350 4X4.....	97-99	35274 ^M	37839	
Big Bear 400 2x4.....	00-04	60272	60124	
Big Bear 400 4X4.....	00-06	60272	60124	
Big Bear 400 4X4.....	08-11	81340	60124	85100
Big Bear 400 4X4.....	2007	81340	60124	
Big Bear Professional 4X4.....	00-01	60170	37840 ^Y	
Big Bear SE 350 4X4.....	96-99		37840 ^Y	
Bruin 350 Automatic 2X4, 4X4.....	04-06	68366	64670	
Grizzly 350 Auto 2X4.....	08-10	76192 ^{AN}	64670	81656
Grizzly 450 EPS 4x4.....	09-11	80540	64670	80534
Grizzly 550 4x4.....	09-11	74496	73996	79403
Grizzly 550 EPS 4X4.....	09-11	74496	73996	79403
Grizzly 600 4X4.....	99-01	36693	39553	
Grizzly 600 4X4.....	1998	36693	37841	
Grizzly 660 Automatic 4X4.....	02-08	65098	64669	79605
Grizzly 700 4X4.....	08-11	74496	73996	79403
Grizzly 700 EPS 4X4.....	08-11	74496	73996	79403
Grizzly 700 FI Auto EPS Special Edition 4X4.....	2011	74496	73996	79403
Grizzly 700 4X4.....	2007	74496	73996	
Kodiak 400 Automatic 2X4.....	03-04	63945	64670	
Kodiak/Grizzly 350 Auto, 350 Auto IRS 4X4.....	07-11	76192 ^{AN}	64670	81656
Kodiak/ Grizzly 400 Automatic 4X4.....	05-09	76192 ^{AN}	64670	80534
Kodiak 400 Automatic 4X4.....	03-04	76192 ^{AN}	64670	81656
Kodiak 400 Automatic 4X4.....	00-02	60170	60013	
Kodiak 400 Automatic 4X4.....	1999		37839	
Kodiak 400 Automatic 4X4.....	96-98		37840 ^Y	
Kodiak 450 Automatic 4X4.....	03-04	63945	64670	
Kodiak/Grizzly 450 Automatic 4X4.....	05-08	76192 ^{AN}	64670	80534
Wolverine 4X4.....	95-04		38526	
Wolverine 450 4x4.....	06-09	72492 ^U	72364	
Rhino 450 4X4.....	08-10	83159 ^S		79815
Rhino 450 4X4.....	2007	83159 ^S		
Rhino 660 4x4.....	03-07	83159 ^S		
Rhino Sport 4X4.....	2011			79815
Rhino 700 4X4.....	08-11	83159 ^S		79815
Rhino 700 DU 4X4, SE 4X4, Sport 4X4.....	10-11	83159 ^S		79815

Arctic Cat

FOOTNOTES:

J. Not compatible with WARN Multi-Mount kit

S. Combination Winch Mount and Bumper

Body Armor and Bumpers

APPLICATION	YEAR	CHASSIS	SIDE CHASSIS	FRONT A-ARM	REAR A-ARM	ROCK SLIDERS	BUMPER
375 Automatic 2X4, 4X4.....	2002						63307 ^J
400 2X4, Automatic 2X4, Automatic ACT 4X4.....	03-04						63307 ^J
400 4X4.....	02-08						63307 ^J
400 Automatic 4X4.....	03-07						63307 ^J
400 Automatic LE 4X4.....	06-07						63307 ^J
400, 500 Automatic MRP 4X4.....	2003						63307 ^J
400 Automatic TBX 4X4.....	04-06						63307 ^J
400 Automatic TRV 4X4.....	06-07						63307 ^J
400 VP 4X4, Automatic VP 4X4.....	05-06						63307 ^J
400i 2X4, 4X4.....	2002						63307 ^J
500 4X4, Automatic 4X4, Automatic TBX 4X4.....	02-04						63307 ^J
500 Automatic 4X4.....	2007						63307 ^J
500 Automatic TRV 4X4.....	04-06						63307 ^J
500i 4X4.....	2002						63307 ^J
Prowler 650 HI XT 4X4.....	06-09	83879	83877	74544	74644	76600	74964 ^S
Prowler 700 XT 4X4.....	2009	83879	83877	74544	74644	76600	74964 ^S
Prowler 700 XTX 4X4.....	09-10	83879	83877	74544	74644	76600	74964 ^S
Prowler 700 XTX LE 4X4.....	08-09	83879	83877	74544	74644	76600	74964 ^S

Body Armor and Bumpers

APPLICATION	YEAR	CHASSIS	SIDE CHASSIS	FRONT A-ARM	REAR A-ARM	ROCK SLIDERS	BUMPER
Outlander 400 (Max) XT.....	2011			78786			
Outlander 400 EFI 4X4, EFI XT 4X4.....	09-11	78610		78786			
Outlander 400 EFI 4X4.....	2009	78610		78786			
Outlander 400 H.O. 4X4, H.O. XT 4X4.....	2008	78610		78786			
Outlander 400 H.O. MAX 4X4, MAX XT 4X4.....	2008			78786			
Outlander 500 EFI 4X4, EFI XT 4X4.....	07-11	78610		78786			
Outlander 500 H.O. MAX EFI 4X4, EFI XT 4X4.....	2008			78786			
Outlander 500 H.O. MAX EFI 4X4.....	2007	78610		78786			
Outlander 650 H.O. Max EFI 4X4, EFI XT 4X4.....	06-07	78610		78786			
Outlander 650 EFI 4X4, EFI XT 4X4.....	06-11	78610		78786			
Outlander 650 H.O. Max EFI 4X4, EFI XT 4X4.....	2008			78786			
Outlander 650 MAX XT-P 4X4.....	2011	78610		78786			
Outlander 800 H.O. Max EFI 4X4, EFI XT 4X4.....	06-07	78610		78786			
Outlander 800 H.O. EFI 4X4, EFI XT 4X4.....	06-08	78610		78786			
Outlander 800 H.O. Max EFI LTD 4X4.....	2007	78610		78786			
Outlander 800 H.O. Max EFI 4X4, EFI LTD 4X4.....	2008			78786			
Outlander 800R EFI 4X4, EFI XT 4X4.....	09-11	78610		78786			
Outlander MAX 400, 500 EFI 4X4, EFI XT 4X4.....	09-11			78786			
Outlander MAX 500 EFI LTD 4X4.....	2010			78786			
Outlander MAX 650, 800R EFI 4X4, EFI XT 4X4.....	09-11			78786			
Outlander MAX 800R EFI LTD 4X4.....	09-10			78786			
Outlander 800R (X) (MR) (XC) (XT) (XT-P) 4X4.....	2011	78610		78786			
Commander 800 (R) (XT).....	2011	85635	85640	85645	85650	85623	
Commander 1000 (X)(XT).....	2011	85635	85640	85645	85650	85623	

Honda

Body Armor and Bumpers

APPLICATION	YEAR	CHASSIS	SIDE CHASSIS	FRONT A-ARM	REAR A-ARM	ROCK SLIDERS	BUMPER
Foreman S (TRX450S) 4X4, ES (TRX450ES) 4X4.....	98-01						62327 ^J
Foreman S (TRX450FM) 4X4, ES(TRX450FE) 4X4.....	02-04						62327 ^J
Foreman (TRX500TM) 2X4.....	2007	76020		75881			71175 ^J
Foreman (TRX500TM) 4X4.....	05-10	76020		75881			71175 ^J
Foreman EPS 4X4 (TRX500FPM).....	08-09	76020		75881			71175 ^J
Foreman ES (TRX500FE) 4X4.....	05-09	76020		75881			71175 ^J
Foreman ES EPS (TRX500FPE) 4X4.....	09-11	76020		75881			71175 ^J
Foreman (TRX500FM) 4X4.....	09-11	76020		75881			71175 ^J
Foreman (TRX500FM) 4X4.....	2012						87732
Rancher (TRX350TM) 2X4, (TRX350FM) 4X4.....	04-06						68766 ^{J,Q}
Rancher (TRX350FM) 4X4, ES (TRX350FE) 4X4.....	00-03						62329 ^J
Rancher ES (TRX350TE) 2X4, ES (TRX350FE) 4X4.....	04-05					68766 ^{J,Q}	
Rancher (TRX420TM) 2X4, ES (TRX420TE) 4X4.....	09-11						81910 ^J
Rancher (TRX420TM) 2X4, ES (TRX420TE) 4X4.....	2008						68766 ^{J,Q}
Rancher (TRX420FM) 4X4, ES (TRX420TE) 4X4.....	2010	84631		84645			81910 ^J
Rancher (TRX420FM) 4X4, ES (TRX420TE) 4X4.....	2009						81910 ^J
Rancher (TRX420FM) 4X4, ES (TRX420TE) 4X4.....	2008						68766 ^{J,Q}
Rancher EPS (TRX420FPM) 4X4.....	2010	84631		84645			81910 ^J
Rancher EPS (TRX420FPM) 4X4.....	2009						81910 ^J
Rancher EPS ES (TRX420FPE) 4X4.....	2010	84631		84645			81910 ^J
Rancher EPS ES (TRX420FPE) 4X4.....	2009						81910 ^J
Rancher AT (TRX400FA) 4X4, (TRX400FG) 4x4.....	04-07						68766 ^{J,Q}
Rancher AT (TRX420FA) 4X4.....	2010	84631		84645			81910
Rancher AT (TRX420FA) 4X4.....	2009						81910 ^J
Rancher AT EPS (TRX420FPA) 4X4.....	2010	84631		84645			81910 ^J
Rincon (TRX650FA) 4X4.....	03-06	76040			76265		65583 ^{J,Q}
Rincon (TRX680FA) 4X4.....	07-12	76040		75881	76265		65583 ^{J,Q}
Rincon GPScape (TRX680FGA) 4X4.....	2009	76040		75881	76265		65583 ^{J,Q}
Rincon GPScape (TRX680FGA) 4X4.....	2008	76040		75881			65583 ^{J,Q}
Rubicon (TRX500FA) 4X4.....	00-04						62331 ^J
Rubicon (TRX500FA) 4X4, (TRX500FG) 4x4.....	05-12	76020		75881			71175 ^J
Rubicon GPScape (TRX500FGA) 4X4.....	2008	76020		75881			71175 ^J
Rubicon GPScape/EPS (TRX500FPA) 4X4.....	09-12	76020		75881			71175 ^J
Big Red 4X4 (MUV700).....	10-11						84654

FOOTNOTES:

J. Not compatible with WARN Multi-Mount kit

Q. Does not accomodate Warn Trail Lights. Lights may be mounted to front rack



FOOTNOTES:
J . Not compatible with
WARN Multi-Mount
kit

S . Combination Winch
Mount and Bumper

AP. Must be Revision A1

AW. Not compatible with
front plow mount

Body Armor and Bumpers

APPLICATION	YEAR	CHASSIS	SIDE CHASSIS	FRONT A-ARM	REAR A-ARM	ROCK SLIDERS	BUMPER
Brute Force 650 4X4.....	05.....						72539J
Brute Force 650 4x4.....	06-08.....	76270.....		76290.....			72539J
Brute Force 650 4x4.....	09-11.....	76270.....		76290.....			83770J
Brute Force 650 4x4i.....	06-08.....	76285AP,AW.....		76298.....	76305.....		
Brute Force 650 4x4i.....	09-11.....	80562.....		76298.....	76305.....		83770J
Brute Force 750 4X4i.....	06-08.....	76285AP,AW.....		76298.....	76305.....		70815
Brute Force 750 4X4i.....	09-12.....	80562.....		76298.....	76305.....		83338
Prairie 650 Twin 4X4.....	01-03.....						63098
Prairie 700 4X4.....	04-06.....						68993
Teryx 750 4x4.....	08-11.....	82210.....	83092.....	81809.....	83076.....		83965S
Teryx 750 LE 4x4.....	08-11.....	82210.....	83092.....	81809.....	83076.....		83965S
Teryx 750 Sport 4x4.....	09-11.....	82210.....	83092.....	81809.....	83076.....		83965S

FOOTNOTES:
C. Requires a WARN
winch mount to
install bumper

J . Not compatible with
WARN Multi-Mount
kit

Q . Does not accomodate
Warn Trail Lights.
Lights may be
mounted to front
rack

S . Combination Winch
Mount and Bumper

Body Armor and Bumpers

APPLICATION	YEAR	CHASSIS	SIDE CHASSIS	FRONT A-ARM	REAR A-ARM	ROCK SLIDERS	BUMPER
ATP 330 4X4, 500 H.O. 4X4.....	04-05.....						62323C,J
Magnum 325 4X4.....	00-02.....						62323C,J
Magnum 330 4X4.....	03-06.....						62323C,J
Magnum 500 4X4.....	99-02.....						62323C,J
Sportsman 335 4X4.....	98-00.....						62323C,J
Sportsman 400 4X4, 500 H.O. 4X4.....	04-04-1/2.....						68573S
Sportsman 400 4X4.....	05-06.....			77473.....			
Sportsman 500 4X4.....	96-03.....						62323C,J
Sportsman 500 4X4.....	05-09.....			77473.....	77251.....		
Sportsman 500 X2 4X4.....	07-08.....			77473.....	77251.....		
Sportsman 500 X2 4X4.....	2006.....			77473.....			
Sportsman 550/850 XP.....	2009.....	83680.....		83682.....	83686.....		
Sportsman 550/850 XP EPS 4X4.....	2009.....	83680.....		83682.....	83686.....		
Sportsman 550/850 XP.....	10-11.....	83680.....		83682.....	84480.....		
Sportsman 550/850 XP EPS 4X4.....	10-11.....	83680.....		83682.....	84480.....		
Sportsman 600 Twin 4X4.....	2003.....						65984C,Q,J
Sportsman 700 Twin 4X4.....	02-03.....						65984C,Q,J
Sportsman 600, 700 Twin4X4.....	04-04-1/2.....						68573S
Sportsman 700 Twin 4X4.....	02-03.....						65984C,Q,J
Sportsman 700 4X4.....	05-07.....			77473.....	77251.....		
Sportsman 800 Twin 4X4.....	05-08.....			77473.....	77251.....		
Sportsman 800 Touring 4X4.....	08-09.....			77473.....	77251.....		
Sportsman 800 X2 4X4.....	07-08.....			77473.....	77251.....		
Sportsman MV7 4X4.....	2006.....			77473.....			
Sportsman 6X6.....	05-08.....			77473.....			
Trail Boss 330 2X4.....	2005.....			77473.....			
Xpedition 325 4X4.....	01-02.....						62323C,J
Xpedition 425 4X4.....	00-03.....						62323C,J
Xplorer 300 4X4.....	97-99.....						62323C,J
Xplorer 400 4X4.....	96-02.....						62323C,J
Ranger 2X4.....	2008.....	78185.....		78278.....	78280.....		
Ranger 500 4X4.....	2009.....	78185.....		78278.....	78280.....		83340S
Ranger 500 4X4.....	2010.....						83340S
Ranger 700 HD 4X4.....	2009.....						83340S
Ranger 700 XP 4X4.....	2009.....	78185.....		78278.....	78280.....		83340S
Ranger 700 XP 4X4.....	07-08.....	78185.....		78278.....	78280.....		
Ranger 800 6X6, Crew 4X4, HD 4x4.....	10-11.....						83340S
Ranger 800 XP 4X4.....	2010.....	78185.....		78278.....	78280.....		83340S
Ranger 800 XP Browning 4X4, XP EPS 4X4.....	10-11.....						83340S
Ranger 800 RZR (4) EPS 4X4.....	2011.....						78207S,AM,AN
Ranger 800 RZR 4X4.....	10-11.....						78207S,AM,AN
Ranger 800 RZR 4X4.....	08-09.....	78164AP.....	78342.....	78346.....	78348.....		78207S,AM,AN
Ranger 800 RZR S 4X4.....	10-11.....						78207S,AM,AN
Ranger 800 RZR S 4X4.....	2009.....	78164AP.....					
Ranger 6X6.....	10-11.....						83340S
Ranger Diesel 4X4.....	2011.....						83340S
Ranger HD 800 EPS 4X4.....	2011.....						83340S
Ranger RZR 4 800 EPS 4X4.....	2011.....						78207S,AM,AN
Ranger RZR 900 4X4.....	2011.....						87722AN,S
Ranger RZR S 800 4X4.....	2011.....						78207S,AM,AN

FOOTNOTES:
J. Not compatible with
WARN Multi-Mount
kit

Q. Does not accomodate
Warn Trail Lights.
Lights may be
mounted to front
rack

AT. Does not fit models
with power steering

Body Armor and Bumpers

APPLICATION	YEAR	CHASSIS	SIDE CHASSIS	FRONT A-ARM	REAR A-ARM	ROCK SLIDERS	BUMPER
Eiger 400 (LT-A400) 2X4, (LT-F400) 2X4.....	02-04.....						63501J
Eiger 400 (LT-A400) 2X4.....	2005.....						63501J
Eiger 400 (LT-A400F) 4X4.....	02-06.....						63501J
Eiger 400 (LT-F400F) 4X4.....	02-07.....						63501J
King Quad 450.....	06-09.....						72229Q,J
King Quad 450.....	08-09.....	78374AT.....		78370AT.....	78366AT.....		
King Quad 450 AXi PS 4X4.....	09-10.....	78374AT.....		78370AT.....	78366AT.....		72229Q,J
King Quad 500 AXi (PS) (Camo) 4X4.....	2011.....	78374AT.....		78370AT.....	78366AT.....		72229Q,J
King Quad 700 4X4.....	05-06.....						72229Q,J
King Quad 700 4X4.....	2007.....	78374AT.....		78370AT.....	78366AT.....		72229Q,J
King Quad 750 AXi 4X4.....	08-09.....	78374AT.....		78370AT.....	78366AT.....		72229Q,J
King Quad 750 AXi (PS) (Camo) 4X4.....	2011.....	78374AT.....		78370AT.....	78366AT.....		72229Q,J
Quad Master 500 (LT-A500F) 4X4.....	00-01.....						62321J
Quad Runner 500 (LT-F500F) 4X4.....	98-03.....						62321J
Twin Peaks 700 4X4.....	04-05.....						68993
Vinson 500 (LT-A500F) 4X4.....	02-07.....						65903J
Vinson 500 (LT-F500F) 4X4.....	03-05.....						65903J

Body Armor and Bumpers

APPLICATION	YEAR	CHASSIS	SIDE CHASSIS	FRONT A-ARM	REAR A-ARM	ROCK SLIDERS	BUMPER
Big Bear 400 2x4.....	00-04.....						62315
Big Bear 400 4X4.....	00-06.....						62315
Grizzly 550 Auto 4X4, Auto EPS 4X4.....	09-11.....	74870AM.....		74874.....	74876.....		75221
Grizzly 600 4X4.....	98-01.....						62319
Grizzly 660 Automatic 4X4.....	02-08.....						63148
Grizzly 700 Auto 4X4.....	07-11.....	74870AM.....		74874.....	74876.....		75221
Grizzly 700 Auto EPS 4X4.....	08-11.....	74870AM.....		74874.....	74876.....		75221
Grizzly 700 FI Auto EPS Special Edition 4X4.....	2011.....	74870AM.....		74874.....	74876.....		75221
Kodiak 400 Automatic 4X4.....	00-02.....						62317
Kodiak 400 Automatic 2X4, 4X4.....	03-04.....						65119
Kodiak 450 Automatic 4X4.....	03-04.....						65119
Kodiak/ Grizzly 400 & 450 Automatic 4X4.....	05-09.....						70319
Rhino 450, 660.....	06-07.....	75266.....	75267.....	75264.....	75265.....		83159S
Rhino 450.....	08-10.....	78518AP.....	78519.....	75264.....	78750.....		83159S
Rhino 700.....	08-11.....	78518AP.....	78519.....	75264.....	78750.....		83159S

FOOTNOTES:
S. Combination Winch
Mount and Bumper

AM. Not compatible with
Warn Plow Mount

AP. Must be Revision A1



WARN RED LETTER DEALERS

WARN Red Letter Dealers have the highest level of WARN product knowledge, as qualified by Warn Industries. Plus, all these dealers stock WARN products and provide installation services. For the most current Red Letter Dealer list visit www.warn.com/corporate/dealerlocator.jsp or contact WARN Customer Service at 800-543-9276 for more information.

ALASKA

Alaska Spring & Performance, 600 E 48th Ave, Anchorage, AK, 99503, 907-563-3802
White Spruce Trailer Sales, Inc., 2156 Bunge St., North Pole, AK, 99705, 907-488-3004

ALABAMA

CI Custom Truck & Car Care, 1001 W Bypass, Andalusia, AL, 36420, 334-427-0118
Custom Trucks Unlimited, 3304 Pepperell Parkway, Opelika, AL, 36801, 334-704-0909
Performance Truck Centers, 5415 Lamco Drive, Montgomery, AL, 36117, 334-260-3582
Sport Trucks, 106 B David Green Road, Birmingham, AL, 35244, 205-733-1250
Steve's Off Road, 1025 Montlimar Dr., Mobile, AL, 36609, 251-345-9444
The Off Road Connection, 1417 Decatur Hwy, Fultondale, AL, 35068, 205-841-2493
Tri State Truck & Auto Accessories, 2428 N Range St, Dothan, AL, 36303, 334-673-8070
Truck Customs of Troy, 190 Hwy 231 N, Troy, AL, 36081, 334-770-0233
Truck Supply & Outfitters, 5100 Summit Ridge, Tuscaloosa, AL, 35405, 205-344-5203
Truckin Up, 3512 Cottage Hill Road, Mobile, AL, 36609, 251-643-7648

ARKANSAS

Come Get Ya Some, 2728 Towson Ave., Fort Smith, AR, 72901, 479-782-6833
Midstate Aftermarket, 25631 I-30, Bryant, AR, 72022, 501-847-8700
Mud Connection 4 X 4 Inc, 6104 Young Road, Little Rock, AR, 72209, 501-562-6494
Performance Off Road, 4614 S. Stadium, Jonesboro, AR, 72404, 870-934-8211

ARIZONA

Four Wheelers Supply Inc, 3530 East Washington Street, Phoenix, AZ, 85034, 602-273-7195
Jamis Autosports, 4734 E Speedway Blvd, Tucson, AZ, 85712, 520-323-3622

CALIFORNIA

4 West 4 Wheel Drive, 650 E Valley Blvd, Colton, CA, 92324-3122, 909-824-0024
All J Products - Jeep Shop, 41610 Brownie Lane, Big Bear Lake, CA, 92315, 909-866-4800
AV Sport Truck Inc., 805 West Ave K, Lancaster, CA, 93534, 661-723-6464
Bedliners Plus, 1326 Koster St., Eureka, CA, 95501, 707-443-0730
Big Johns Performance, 24233 Creekside Road, Valencia, CA, 91355, 661-254-1611
Central 4 Wheel Drive Inc - SA, 3248 Auburn Boulevard, Sacramento, CA, 95821, 916-481-7842
Extreme Off Road & Repair, 1320 Brookhaven Dr., Clovis, CA, 93612, 559-323-8222
Off Road Warehouse, 7915 Balboa Ave, San Diego, CA, 92111-2414, 858- 565-7792
Poly Performance, 245 Tank Farm Rd., San Luis Obispo, CA, 93401, 805-783-2060
Redding Four Wheel Drive Inc, 850 Commerce Street, Redding, CA, 96002, 530-221-6063
Street Scene, 1035 A Main St., Watsonville, CA, 95075, 831-728-5634
Toys For Trucks, 11352 Hesperia Road #A, Hesperia, CA, 92345, 760-956-3525

COLORADO

4x4 Off Road & Used Parts, 938 W Willow Lane, Ft. Collins, CO, 80524, 970-224-1133
Alpine Off Road, 427 N Cascade, Montrose, CO, 81401, 970-240-9000
Barney Brothers Off Road, 2477 Industrial Blvd., Grand Junction, CO, 81505, 970-243-9300
Berthod Motors Inc, 2914 Grand Ave, Glenwood Springs, CO, 81601, 970-945-7466
Bullhide 4x4 & Auto Acc, 5817 S. College Ave., Ft Collins, CO, 80525, 970-224-2288
CRP Truck & Auto Accessories, 2102 9th St, Greeley, CO, 80631, 970-351-8603
Fort Collins 4 x 4 Center, 1101 N College Avenue, Ft Collins, CO, 80524, 970-482-5500
Four To Go, 10930 West 44th Avenue, Wheatridge, CO, 80033, 303-421-5876
High Country Performance 4x4 Inc, 1695 West Hamilton Place, Englewood, CO, 80110, 303-761-7379
John's 4 X 4 Center, 6367 Araphoe Road, Boulder, CO, 80303, 303-449-2640
Parker Motorsports, 8900 S. Brompton Way, Parker, CO, 80134, 720-851-5948
Predator 4 Wheel Drive, 4260 North Nevada Avenue, Colorado Springs, CO, 80907, 719-528-5790
Proffitt's Cruisers, 21474 Austin Road, Austin, CO, 81410, 970-874-1272
Specialized Truck & SUV, 761 10 Mile Drive, Frisco, CO, 80443, 970-668-9693

CONNECTICUT

EVB, 44 Kenosia Avenue, Danbury, CT, 06810, 203-748-5700

FLORIDA

Catlin Truck Accessories, 1215 N Main Street, Jacksonville, FL, 32206, 904-354-8521
Fortec, Inc., 698-702 SW 15th Street, Pompano Beach, FL, 33060, 954-785-3131
GT 4WD LLC, 8956 NW 24th Terrace, Miami, FL, 33172,
JeepersDen, 14445 East Colonial Dr., Orlando, FL, 32826, 407-658-4848
Jeff's Jeep Yard, 1185 Court St., Clearwater, FL, 33756, 727-449-0800
Morris 4x4 Center, 1020 SW 10th Ave, Pompano Beach, FL, 33069, 954-941-7807
Northside Tire & Four Wheel Drive, 513 West Waters Avenue, Tampa, FL, 33604, 813-935-7029
Speed & Truck World, 1060 W. Sunrise Blvd., Ft. Lauderdale, FL, 33311, 954-760-9922
The Custom Truck Shop, 1607 Village Green Drive, Port St Lucie, FL, 34952, 772-335-1700
Truckin Motion, 8011 SW 40th St., Miami, FL, 33155, 305-261-5424

GEORGIA

Fortec, Inc., 830 Ellis Street, Roswell, GA, 30075, 770-642-7260
Powertrain Inc, 421 Telfair Road, Savannah, GA, 31415, 912-234-6641
Southern Off Road Specialists, 843 McFarland Rd., Alpharetta, GA, 30004, 770-346-7777

HAWAII

Maui Off Road Center, 94-1388 Moaniani St. Unit 103, Waipahu, HI, 96797, 808-678-9500
Maui Off Road Center, 251 Hooohana Street, Kahului, HI, 96732, 808-871-6263

IOWA

Sadler Power Train, 2150 Sadler Drive SW, Cedar Rapids, IA, 52404, 319-366-8238

IDAHO

Buck's 4x4 Off-Road & Tire Center, 4100 State St., Boise, ID, 83703, 208-343-2061
Cobalt Truck Equipmt, 345 W. Karcher Rd., Nampa, ID, 83687, 208-887-7788
First Class Restyling & Offroad, 627 2nd Ave So, Twinfalls, ID, 83301, 208-734-1111

ILLINOIS

Attitude Performance, 2349 E Oakton Street, Arlington Heights, IL, 60005, 847-593-0505
Carl's 4WD & Performance Center, 1509 Carlyle Road, Bartelso, IL, 62218, 618-765-2199
The Cliffs Insane Terrain Offroad Park, 2400 East Bluff Street, Marseilles, IL, 61341, 815-693-8129

INDIANA

Valparaiso Auto & Trailer Sales, 861 West US Highway 30, Valparaiso, IN, 46385, 219-462-8291

KENTUCKY

Manning Truck Equipment, 12000 Westport Road, Louisville, KY, 40245, 502-426-5210
Moab Off Road of Kentucky, 4915 Poplar Level Raod, Louisville, KY, 40218, 502-962-8141
Performance Off Road Inc, 6434 Lower Tug Rd, Alexandria, KY, 41001, 859-635-3058
Wynn Fire Equipment, 326 Old Lynn Camp School Road, Corbin, KY, 40702, 606-523-9269

LOUISIANA

Custom Welding & Design, 13195 Lake Charles Hwy, Leesville, LA, 71446, 337-537-1369
Dandy Products, 1026 Joseph Street, Shreveport, LA, 71107, 318-227-2505
Glass Tint Etc., 2109 Mac Arthur, Alexandria, LA, 71303, 318-443-8468
Ivy Redding Company Inc, 168 Redding Road, Calhoun, LA, 71225, 318-644-2883
Kirk's Auto Limited, 1726 N. Airline Hwy, Gonzales, LA, 70737,
Light Line of Louisiana, 11940 Cloverland Ave., Baton Rouge, LA, 70809, 225-752-5565
Ranch Outlet, 3324 NE Evangeline, Lafayette, LA, 70507, 337-235-0795
Truck Stuff USA, 14330 Plank Rd., Baker, LA, 70714, 225-774-9797

MASSACHUSETTS

Endangered Species Jeep, 155 Elm Street, Holyoke, MA, 01040, 413-532-0732
Lacey Truck Equipment, 158 Elm Street Route 110, Salisbury, MA, 01952, 978-463-2883
Vassar's Complete Automotive Service, 14 French King Hwy, Greenfield, MA, 01301, 413-773-7770

MARYLAND

East Coast Off-Road HQ, 2133 N. Fountain Gate Road, Bel Air, MD, 21015, 410-879-8229

MAINE

Archies Off Road, 209 Sanford Road (Route 109), Wells, ME, 04090, 207-646-3725

MICHIGAN

Cascade Four Wheel Drive Inc, 2700 Northern Drive South East, Grand Rapids, MI, 49512, 616-949-3630
Independent Dealer Services, 40940 Production Dr., Harrison TWP, MI, 48045, 586-469-6099
Jeeperz Creeperz Inc, 1627 Eureka, Wyandotte, MI, 48192, 734-281-8141
Mumbly's off Road, 33150 Gratiot Avenue, Clinton Township, MI, 48035, 586-790-3300
Truck & Van Specialties Inc., 6504 Chicago Dr., Zeeland, MI, 49464, 616-748-9450
Unlimited Off Road Centers, 3201 West Thompson, Fenton, MI, 48430, 810-936-7000

MINNESOTA

Four Wheel Drive Center of Minnesota, 5711 West 36th Street, St Louis Park, MN, 55416, 952-927-8811
Hooze 4x4, 1435 147th Avenue, Ham Lake, MN, 55304, 763-413-4944
Northland Off-Road & 4 Wheel Drive, 910 NE 4th Street, Grand Rapids, MN, 55744, 218-326-0545

MISSOURI

Creative Trim & Performance, 2217 Broadway, Cape Girardeau, MO, 63701, 573-332-1600
Sportsland Truck Accessories, 2039 Peck Hollow Road, Rogersville, MO, 65742, 417-753-2069

MISSISSIPPI

Buck Sullivan, Inc., 1022 Terry Rd., Jackson, MS, 39204, 601-352-7641
Bumper to Bumper Tires & Accessories, 1226 Hwy 98 By-Pass, Columbia, MS, 39429, 601-731-5835
Camper City of Hattiesburg, 7166 Hwy 49 N, Hattiesburg, MS, 39402, 601 296 1800
Line-X of Meridian, #71 Hwy 19 North, STE 3, Meridian, MS, 39307, 601-693-0030
Weathers Auto Supply - TU MS, 1219 South Gloster Street, Tupelo, MS, 38803-2187, 662-842-5577

MONTANA

Blue Ribbon Accessories & Audio, 1424 Cedar Street, Missoula, MT, 59802, 406-543-0387
Mike's Off-Road, 80675B Gallatin Rd., Bozeman, MT, 59718, 406-586-3043
TNT Springs Inc, 226 North 13th, Billings, MT, 59101, 406-252-2290

NORTH CAROLINA

4x4 Country, 1039 Brevard Rd, Asheville, NC, 28806, 828-667-4617
CS Motorsports, 3214 S. New Hope Rd., Gastonia, NC, 28056, 704-853-1990
Down East Offroad, 1425 Thorne Ave, Wilson, NC, 27893, 252-246-9440
Five Points Motor Company, 800 Greensboro Rd., High Point, NC, 27260, 336-883-8902
High Country 4x4 Center, 465 East King Street, Boone, NC, 28607, 828-266-9773
Jim Campen Trailer Sales Inc, 6037 Ashville Hwy, Hendersonville, NC, 28791, 828-684-8889
Rowells Truck Accessories Inc, 185 Corporate Blvd., Indian Trail, NC, 28079, 704-821-6828
Tom's 4 Wheel Drive Inc., 3567 Old US Hwy 52, Lexington, NC, 27205, 336-731-8509
Xtreme Machines, 520 Highway 70 South East, Hickory, NC, 28602, 828-322-6463

NEBRASKA

Ultimate Truck Accessories, 13434 Millard Avenue, Omaha, NE, 68137, (402) 896-0770

NEW HAMPSHIRE

Domenic's Jeep & Auto Repair, 19 Hazel Drive - Units 2 & 3, Hampstead, NH, 03841, (603) 329-9439

NEW JERSEY

FDR Hitches, 112 W. Westfield Ave, Roselle Park, NJ, 07204, 908-259-9500
FDR Hitches/Hawthorne Hitch & Trailer, 7 Lincoln St., Hawthorne, NJ, 07506,
FDR North, 66 Newark Pompton Tpke, Pequannock, NJ, 07440, 973-696-6610
OK Auto 4WD & Tire, 2621 State Route 57, Stewartsville, NJ, 08886, 908-454-6973

NEW MEXICO

Clark Truck Equipment Co Inc, 501 Industrial NE, Albuquerque, NM, 87107, 505-880-8222

NEVADA

Custom Truck Accessories, 385 Kietzke Lane, Reno, NV, 89502, 775-329-5111
Maximum Offroad, 4610 S Arville St. #C, Las Vegas, NV, 89103, (702) 227-5100

NEW YORK

4 X Heaven, 221 West Fulton Street, Gloversville, NY, 12078, 518-725-1203
Barker Truck Accessories, 1669 Quaker Road, Barker, NY, 14012, 716-795-9172
Rock Spyder 4x4, 2221 Kenmoore Ave Unit 106, Buffalo, NY, 14207, 905-294-0494
The Truck Shop, 105 Montauk Highway, West Sayville, NY, 11796, 631-589-6500

OHIO

Garry's Automotive, 4080 County Road 57, Galion, OH, 44833, 419-947-3176

OKLAHOMA

Custom Off Road Equipment, 400 South Vermont #108, Oklahoma City, OK, 73108, 405-943-2673
Ranch HandTruck Accessories, 821 N Portland Ave, Oklahoma City, OK, 73107, 405-917-5688
Ryno 4WD, 11105 E 56th St., Tulsa, OK, 74146, 918-459-9003
Sam's Offroad Equipment Inc, 4345 South West Boulevard, Tulsa, OK, 74107, (918) 446-5535

OREGON

Archer Brothers Inc - EU OR, 1942 W 11th Avenue, Eugene, OR, 97402-3519, 541-687-8728
Burns Garage Auto Parts, 188 N. Broadway, Burns, OR, 97720, 541-573-7278
Fleet Sales West, 2175 N Pacific Hwy, Woodburn, OR, 97071, 503-982-5095
Gresham 4 Wheel Drive, Inc., 2050 NW Burnside, Gresham, OR, 97030, 503-666-6781
Lauren Young Tire Center, 2460 NE Stephens, Roseburg, OR, 97470, (541) 672-6616
MaXed Out Off Road, 3355 Washburn Way, Klamath Falls, OR, 97603, 541-273-5337
Precision Performance, 93976 Ocean Way, Gold Beach, OR, 97444, 541-247-2232
Rob's Off Road Center, 11955 SE Highway 212, Clackamas, OR, 97015, 503-650-6101
Rusty's 4 X 4, 2294 Sage Road, Medford, OR, 97501, 541-779-1339
Salem Off Road Center Inc, 2953 Silverton Road North East, Salem, OR, 97303, 503-399-7691
Tom & Gigs Inc, 135 S Schoneman St, Coos Bay, OR, 97420, 541-888-4660
XTC Truck & Toy, 1203 12th Street, Hood River, OR, 97031, 541-490-3512

PENNSYLVANIA

4 X 4 Suspension & Gear, 610 Garfield Avenue, West Point, PA, 19486, 215-699-8061
EMS Offroad, RR 4 Box 144, Sunbury, PA, 17801, 570-437-4200
High Caliber Motorsports LLC, RR2 Box 137a, Wysox, PA, 18854, 570-265-5533
Hoak's Four Wheel Drive Center, 815 Hellam Street, Wrightsville, PA, 17368, 717-252-3602
Meridian Off Road Center Inc, 655 New Castle Road, Butler, PA, 16001, 724-285-5082
RV Four Wheel Drive & Performance, 712 West Main Street, Mechanicsburg, PA, 17055, 717-697-8418
Truck Stuff And More, 224 N. Water St., Bellefonte, PA, 16823, 814-357-8142

SOUTH CAROLINA

Carolina Custom Truck Acc, 2005 2nd Loop Rd, Florence, SC, 29501, 843-664-2414
Clemson 4 Wheel Center, 10733 Clemson Blvd., Seneca, SC, 29678, 864-882-0277
Hound Dog 4x4, 1320 Veterans Rd, Columbia, SC, 29209, 803-783-7676
Lee Transport Equipment Inc, 1300 Bluff Road, Columbia, SC, 29201, 803-799-7860
Low Country 4x4, 1634 Savannah Highway, Charleston, SC, 29414, 843-766-3885
Rhino Linings of Greenville, 775 Woodruff Rd. #K, Greenville, SC, 29607, 864-627-0385
Rhino Linings of Spartanburg, 144-A Southport Road, Spartanburg, SC, 29306, (864) 587-5600
West Wateree Off Road, 1982 Whiting Way, Lugoff, SC, 29078, 803-438-5252

TENNESSEE

Line-X of Knoxville, 8418 Kingston Pike, Knoxville, TN, 37919, 865-693-3776
RPM Offroad LLC, 1804 Volunterr Parkway, Bristol, TN, 37620, 423-573-3300

TEXAS

Alamo Industries Inc, 5923 Gateway West, El Paso, TX, 79925, 915-781-1234
Ayres, Inc., 1255 I-10 South, Beaumont, TX, 77701, 409-833-3381
Brian's Tint Shop, 12954 Hwy 90, Houston, TX, 77049, 281-459-1917
Dynamic Customs of Lufkin, 614 S. Timberland Dr., Lufkin, TX, 75901, 936-639-4888
East Texas Truck Equipment, 5685 East Loop 281 South, Longview, TX, 75602, 903-758-6171
Master Hitch Inc, 5300 Glenmont Drive, Houston, TX, 77081, 713-974-4440
Mike's Off Road, 6440 Airport Freeway, Haltom City, TX, 76117, 817-834-4900
Ranch Hand Truck Accessories, 1039 N Loop 12, Irving, TX, 75061, 972-438-4447
Ranch Hand Truck Accessories, 12257 West Avenue, San Antonio, TX, 78216, 210-530-0073
Ranch Hand Truck Accessories, 10717 EM 1960 W, Houston, TX, 77070, 281-807-6468
South Texas Outfitters, 8211 Hwy 281 N., San Antonio, TX, 78216, 210-349-7319

UTAH

Hinckley Dodge, Chrysler, Jeep, 2309 S. State St., Salt Lake City, UT, 84115, 801-994-4466
Moab 4x4 Outpost, 1805 S. Hwy 191, Moab, UT, 84532, 435-259-1109
Mount Logan Off Road, 2561 North 200 West, North Logan, UT, 84341, 435-752-4272
On Track 4x4, 739 N 935 W, Cedar City, UT, 84721, 435-652-0447
Thunder Mountain Truck Outfitters, 1018 West 800 North Logan, UT, 84321, 435-752-0548

VIRGINIA

Eastern Truck & Accessories, 6320 E. Virginia Beach Blvd., Norfolk, VA, 23502, 757- 461-2600
Independent 4X, 10403 South Leadbetter Rd, Ashland, VA, 23005, 804-550-0480
Iron Pig Off Road, 11812 Main St., Fredericksburg, VA, 22408, 540-361-7400
Southern Truck and Custom, 17651 Rogers Clarke Blvd, Milford, VA, 22514, 804-633-3299

WASHINGTON

Advance Toys for Trucks, 628 S Spruce St., Burlington, WA, 98233, 360-419-4336
Billy Bob's Offroad & Truck Specialties, 1322 Meridian E, Milton, WA, 98354, 253-926-0447
Cobalt Truck Equipment, 4620 E Trent, Spokane, WA, 99212, 509-534-0446
Kent 4 WD, 730 Central Ave N, Kent, WA, 98032, 253-872-7334
La Man Offroad, 7292 Martin Way NE, Olympia, WA, 98516, 360-456-1776
Northridge 4x4, 5225 NW Newberry Hill Rd., Silverdale, WA, 98383, 360-340-0282
Northwest Motorsports, 1502 River Road, Puyallup, WA, 98371, 888-969-7762
Protection Plus, 352 Spanish Prairie, Colville, WA, 99114, (509) 684-5849
Protection Plus LLC, 30305 N. Dalton Rd, Deer Park, WA, 99006, 509-276-4294
Randy's Off Road Connection, 14702-A Smokey Pt. Blvd., Marysville, WA, 98271, (360) 659-5259
The 4x4 Store, 604 Bridge Street, Clarkston, WA, 99403, 509-758-1494
Woody's 4 X 4, Inc., 6408 St. Johns Blvd, Vancouver, WA, 98661, (360) 693-6840

WISCONSIN

Toys For Trucks, W7158 Highway 10 & 114, Menasha, WI, 54952, 920-734-4272
Toys For Trucks, 2326 South Washburn Ave, Oshkosh, WI, 54904, 920-231-7763
Toys For Trucks, 631 Grand Ave, Schofield, WI, 54476, 715-359-9993
Toys For Trucks, 3080 Market Street, Green Bay, WI, 54304, 920-339-5262
Toys For Trucks - Green Bay, 2230 Main St, Green Bay, WI, 54302, 920-884-2411
Toys for Trucks - Greenville, W. 6411 Greenville Drive, Greenville, WI, 54942, 920-757-0680

WYOMING

Champion Spring & Brake, 1604 Wagonhammer Ln., Gillette, WY, 82718, 307-682-0800
D's 4 Wheel Drive, 210 East 15th Street, Cheyenne, WY, 82001, (307) 634-1736
Rocket City Offroad, Inc., 1645 Elk Street, Rock Springs, WY, 82901, 307-362-7925
Wyoming Kustomz Inc., 2100 E. Yellowstone Hwy., Casper, WY, 82609, 307-237-7040

CANADA

Cap-it Truck Accessories, 10016-124 Ave., Grande Prairie, AB, T8V 5L7, 780-538-2228
CTP Distributors, 13313 - 100th St, Grande Prairie, AB, T8V 4H4, 780-538-221
CTP Distributors, 17415 103rd Ave, Edmonton, AB, T5S 1J4, 780-452-9226
CTP Distributors, A 707 Barlow Trail SE, Calgary, AB, T2E 8C2, 403-237-7660
Interior Off Road, 17210 - 103 Ave., Edmonton, AB, T5S 1N1, (780) 451-0030
Modern Motors Calgary Limited, 5539 Blackfoot Trail South East, Calgary, AB, T2H 1L6, (403) 253-0664
National 4WD Centres, 803 - 46 Ave SE, Calgary, AB, T2G 2A5, 403-214-2145
CTP Distributors, 19315 - 96

AUTHORIZED SERVICE CENTERS

NORTHWEST REGION

Warn Industries, 13270 SE Pheasant Court, Milwaukie, OR 97222
503-722-1200, 800-543-WARN, 503-722-3000 (fax)

Kent 4 WD, 730 North Central, Kent, WA 98032, 253-852-2720,
800-962-1463 (national), 253-852-2796 (fax)

Six States Distributors, 3711 East Trent, Spokane, WA 99202, 509-535-7671,
800-541-4320 (national), 509-535-9105 (fax)

Six States Distributors, 2138 Century Way, Boise, ID 83709, 800-635-3702 (national),
800-632-2006 (in state), 208-377-9393, 208-377-9437 (fax),

Six States Distributors, 1884 East 3rd Ave, Anchorage, AK 99501, 907-278-6622,
907-278-6625 (fax)

Six State Distributors, 44113 K Beach Road, Soldatna, AK 99669, 907-260-9177,
907-260-9194 (fax)

WESTERN REGION

Four Wheelers Supply, 3530 East Washington St, Phoenix, AZ 85034, 602-273-7195,
800-606-6421 (national), 602-225-0751 (fax)

Redding 4 Wheel Drive, 850 Commerce Street, Redding, CA 96002, 530-221-6063,
877-223-8906 (national), 530-221-6173 (fax)

Tri-County Gear, 1143 West 2nd St., Pomona, CA 91766, 909-623-3373,
909-469-4685 (fax)

ROCKY MOUNTAIN REGION

Predator 4wd, 4260 North Nevada Ave, Colorado Springs, CO 80907, 719-528-5790,
719-531-0130 (fax)

Six States Distributors, 247 West 1700 South, Salt Lake City, UT 84115, 801-488-4666,
800-453-5703 (national), 801-488-4676 (fax)

Montana Jack's (ATV Only), 522 Montana Ave., Libby, MT 59923, 406-293-8661,
877-463-2344 (national), 406-293-9511 (fax),

MIDWEST REGION

4 Wheel Drive Center, 5711 West 36th Street, St. Louis Park, MN 55416,
952-927-8811, 800-622-0781 (in state), 800-328-4445 (national), 952-927-4500 (fax)

G.D.S. 4X4, #24 Schiber Ct., Maryville, IL 62062, 618-288-7470,
877-437-4294 (national), 618-288-7370 (fax),

SOUTHWEST REGION

D.S.I. Distributing, 6025 Corridor Parkway, Schertz, TX 78154, 210-651-2000,
800-374-8028 (national), 210-651-2020 (fax)

SOUTH REGION

Dealers Truck Equipment, 6601 I-30, Little Rock, AR 72209, 501-568-9000,
800-568-9006 (national), 501-568-7000(fax)

Buck Sullivan, 1022 Terry Rd, Jackson, MS 39204, 601-352-7641,
800-264-4824 (national), 601-352-7643 (fax)

NORTHEAST REGION

Hoak's 4 Wheel Drive, 815 Hellam Street, Wrightsville, PA 17368, 717-252-3602,
800-827-1341 (national), 717-252-2296 (fax)

Weathers Auto Supply, 23308 Airpark Dr, Petersburg, VA 23803, 804-861-1076,
800-572-2886 (in state), 804-861-6891(fax)

SOUTHEAST REGION

Clemson 4 Wheel Center, 10733 Clemson Blvd, Seneca, SC 29678, 864-882-0277,
800-257-4294 (national), 864-882-0278 (fax)

Reliable Equipment, 7779 Dixie Highway, Louisville, KY 40258, 502-935-5501,
800-626-6532 (national), 502-933-5980 (fax),

Truck Equipment Sales, 4700 Rangeline Rd, Mobile, AL 36619, 251-666-8606,
800-633-6946 (national), 251-666-8676 (fax)

Truck Supply & Outfitters, 5100 Summit Ridge, Tuscaloosa, AL 35405,
205-344-5203, 205-553-4676 (fax)

Florida Powertrain, 2265 West Beaver Street, Jacksonville, FL 32236, 904-354-5691,
800-741-0603 (national), 904-354-8346 (fax)

Florida Powertrain, 6501 Adamo Hwy 60, Tampa, FL 33619, 813-623-6713,
800-771-6713 (national), 813-621-1741 (fax)

Florida Powertrain, 4455 Dardanelle Dr, Orlando, FL 32808, 407-291-1441,
800-226-0002 (national), 407-578-7455 (fax)

Florida Powertrain, 7310 NW 46th St., Miami, FL 33166, 305-592-8612,
866-592-8612 (national), 305-477-7012 (fax)

CANADA

Drive Products, 1665 Shawson Drive, Mississauga, Ontario L4W 1D7, 905-564-5800,
800-668-6012 (Canada Only), 905-564-5799 (fax)

Drive Products, 900 Montee-de-Liesse, St-Laurent, QC H4T 1N8, 514-856-0407,
800-361-9291(national), 514-856-0636 (fax)

Drive Products, 4311-122 Ave SE, Calgary, Alberta T2Z 4J3, 403-720-8033,
800-267-0559(national), 403-720-8040 (fax)

Drive Products, 18073- 107 Avenue, Edmonton, Alberta T5S 1K3, 780-483-7867,
800-661-7335 (national), 780-484-5814 (fax)

Drive Products, 19150- 96 Avenue, Surrey, BC V4N 3R3, 604-888-4464,
800-473-1717 (national), 604-888-2029 (fax)

Drive Products, 144 Ilsley Ave, Dartmouth, NS B3B 1V1, 902-468-8288

Interior Off Road Equipment, 17210-103 Ave, Edmonton, AB T5S 1N1,
780-451-0030, 780-451-3116 (fax)

Interior Off Road Equipment, 1594 Nicholson Street, Prince George, BC V2N 1V6,
250-562-6760, 250-562-3407 (fax)

Lordco Auto Parts, 20121 Industrial Ave Unit 101, Langley, BC V3A 4K6,
604-530-3943, 604-530-3961 (fax)

Motovan Corporation, 1391 Gay Lussac, Boucherville, QC J4B 7K1, 450-449-7733,
866-449-1095 (national), 450-449-0411 (fax)



WARN INDUSTRIES, INC.

12900 S.E. Capps Road
Clackamas, OR USA 97015-8903

1-503-722-1200

FAX: 1-503-722-3000

Customer Service: 1-800-543-9276

Dealer Locator Service: 1-800-910-1122

The dealer locator service is available 7 days per week and 24 hours a day.

Customer service is available between 7:00 am and 4:00 pm Pacific Time, Monday through Friday.

International Sales Support: 1-503-722-1200



WARN.COM



DISTRIBUTED BY:

912577.A0

For more than 60 years, Warn Industries has been a leader of innovation in Off Road, Powersports, Industrial, and Powertrain products. Warn Industries is committed to developing intellectual property that provides our customers with reliable, unique products that are best in class. Warn Industries has a significant number of issued and pending patents around the world. Please respect our intellectual property rights. Some photos taken on private closed courses. Remember to tread lightly on public land. © 2011 Warn Industries, Inc. WARN®, the WARN logo, and Trans4mer® are registered trademarks of Warn Industries. PowerPlant™, PulizAll™, Spydura™, and Go Prepared™ are trademarks of Warn Industries, Inc. Specifications subject to change at any time. All photographs shown are copyrighted material. Reproduction in any way is prohibited without written permission of Warn Industries or the copyright owner. Printed in USA 50M 10/11